
SITRAK
LONG-HAUL



THE TRUCK YOU CAN RELY ON

MORE

POWER / COMFORT / RELIABILITY / SAFE


SITRAK
SITRAK
SITRAK



THROUGH RIGOROUS TEST

Through rigorous tests with higher standards, we can meet different demand and provide solutions for customers, and have won appraise from customers.

STYLISHNESS AND TECHNOLOGY GO TOGETHER



Evolution before your very eyes

SITRAK invokes stylish appearance and elegant sensation□Traces of technology are revealed in vehicle body with low wind resistance, in its broad view and smart light combinations.











A home-like comfort for you

- The wide-opening doors and ergonomic access ladders make it easier to get on board.
- You will take a pleasant trip thanks to the spacious cab with good view, and move freely owing to the flat floor.














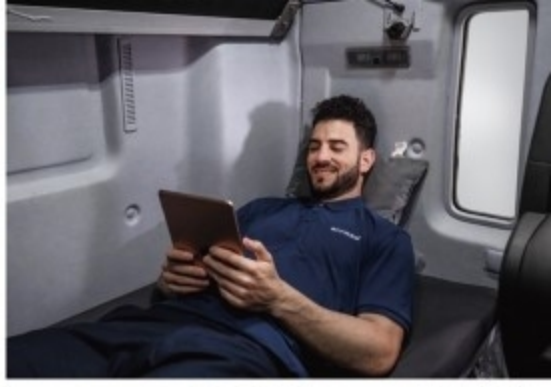



Comfortable seat and berth

- In addition to the luxury and comfortable air suspended seat with waist cushion, for which the inflation and deflation of the airbag can be realized through pressing the adjustment button, armrest on both sides provide better comfort to the drivers.
- Heating function for the driver seat is optional, which could bring warmth rapidly for driver in cold winter.
- The berth is 2 meters long and 0.8 meters width, bed-frame is steady which can let you have a good rest.
- In case of falling down, the upper berth is protected by nylon mesh while the lower berth is equipped with protective bar. Besides, reading lamp is built in for reading or relaxation.

User - friendly air conditioning to meet the various needs of temperature

- Standardly equipped with A/C, with the cooling and heating capacity of more than 5.0kW and 7.0kW respectively. The temperature inside the cab is effectively adjusted relying on the smart design of air duct and outlets.
- Parking cooler is optional.
- Fuel-operated heater is optional.







Clear layout at your fingertips

- Functionally-related buttons or rotary switches are arranged together to guarantee direct, rapid and correct operation.
- Multi-function steering wheel is easy to operate and can further improve driving safety and comfort.







Elegant yet practical

Even the design of doors teems with wisdom. Control buttons such as door lock, widow regulator, rearview mirror adjustment key and electric heating control key are located exactly where you need them.



Storage space

There are several storage boxes with the capacity over 200L, where clothing, luggage and large-size objects can be contained. The lower berth is reversible for larger interior space.

Tips: vehicle-mounted tool can be placed on the left and right two boxes.









MORE POWER

The combination of MC series engine, smart transmission and high-efficiency driving axles, enable you to raise economic yields and reduce cost while meet your more power needs.



Tractor axle configurations


Thanks to the rigorous theory verification and complex road tests, the powertrain is well chosen, thus makes full use of it.

Higher efficiency

Reasonable matching and advanced technology support raise the overall operation.

Longer maintenance interval

Longer oil change interval guarantee higher attendance. Engine, transmission and axle oil change interval is as long as 100,000 kilometers.

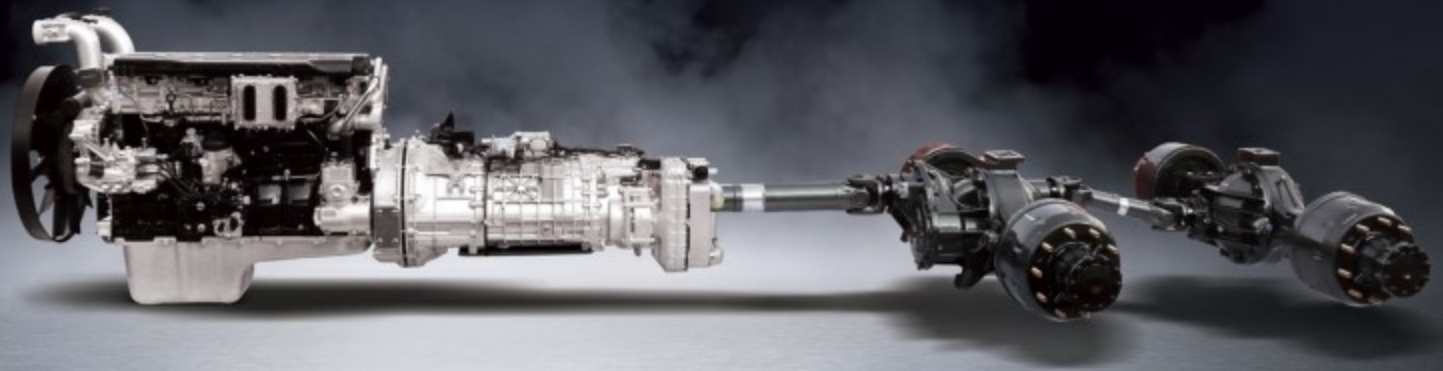

ENGINE

DERIVING FROM EUROPE AND IMPROVED IN CHINA

– THE MC ENGINE EURO III – EURO VI



- SITRAK is mounted with MC series engine with the torque from 1600Nm to 2500Nm, and the rated power from 320hp to 540hp. The wide range of torque speed makes the vehicle work economically most of the time, accordingly, the power is more stronger and the fuel consumption more lower with ultra durability and reliability.
- MC series engine is equipped with specially-designed EVB function, which effectively raises engine braking power by precisely controlling the butterfly-valve opening of the proportional valve.



B10 LIFE EXCEEDS 1,500,000 KM

Higher strength

The cylinder block adopts vermicular cast iron which has higher rigidity and strength, thinner wall thickness and lower weight. Compared with gray cast iron, the vermicular cast iron can improve the extension strength by 75%, elasticity modulus by 40% and fatigue strength by 100%.

Higher accuracy

Both the main bearing cap of the crankshaft and the bigger end of the con-rod adopt world advanced cracking technology, which produces extremely high lateral supporting effect and guarantees the precise and strong positioning. This technology remarkably improves the carrying capacity and reduces the wear of the bearing.

Higher injection pressure and accuracy

The electronic control unit(ECU) precisely control the fuel injection process according to the running status of the engine the maximum injection pressure can reach 1600bar, which makes the atomization effect of the fuel injection better, the engine more powerful and the fuel consumption much lower. High outbreak and combustion pressure reduce the soot content of the engine oil.

















ZF

- ZF transmission adopts synchronizer for shifting and is equipped with servo shift assisted mechanism,which reduces the shifting force and guarantees the quickness and smoothness during gear shift change.
- The ZF transmission adopts lean gear grinding technology, which reduces the noise while improves the transmission efficiency. Besides, the aluminum transmission housing reduces the weight and increases the load.



- Hydraulic retarder is optional. With which, it can mitigate the loading of driving brakes against longer slope, raising driving safety.



HW-AMT

HW AMT transmission is equipped with TCU, which guarantees accurate shifting by detecting accelerator pedal position, load, braking status, engine's torque and speed, current vehicle speed, etc., so that the vehicle can always works at the best speed.

DRIVE AXLE

ORIGINATED FROM GERMANY AND MADE IN CHINA

Derived from European technology, and all axles are self-made by SINOTRUK. Standard-equipped with Oerlikon gear for main reduction, drum-type or disc-type brakes and multiple tonnage and configuration are optional to meet different working conditions.







Single-reduction drive axle—MCY series

High-tensile stamping and welding materials featured with light weight and strong carrying capacity.

Double-reduction drive axle—MCP/MAT series

Casting high-tensile materials with spindle head in manner of one-piece press fitting, resulting in reliable structure.

Full coverage of tonnage and specifications

MCY11, MCY12, MYC13, MCY16/MCP16/MAT16, MCY17, MCP23 can meet different axle loads from 11 tons to 23 tons.

Adopting wheel hub bearing unit

The hub bearing has reasonable load distribution with long service life and higher reliability.



Longer oil change interval

With machine oil filter inside the drive axle,the oil change interval could be as long as 100,000 kilometers under highway condition.

AN EXCELLENT BASIS TO BUILD ON

The upper body is easy to be mounted and the layout of the chassis is clear. The frame provides excellent payload and driving performance.

Light weight design

SITRAK adopts light weight design by mass application of aluminium alloy parts, raising the payload substantially.


Modular design

The sturdy side-member adopts high strength alloy steel according to standard hole spacing and hole diameter, making for modular layout and refitting of upper body. The modularized design is general-purposed which is easy for maintenance.

Full airbag suspension and ECAS

- Equipped with Full Airbag Suspension for optimum driving safety and comfort.
- Electronically Controlled Air Suspension System (ECAS) allow you to adjust the height of the vehicle, facilitating the loading and unloading, and improve transportation efficiency.
- The remote control has memory function, which can quickly adjust the chassis to the needed height with one-click.

SITRAK



Full airbag air suspension



ECAS



Aluminum alloy oil tank



Aluminum alloy wheel hub



Aluminum alloy air reservoir

Continental
SKF
MANN+HUMMEL
BOSCH
Valeo
SACHS
ZF
TENNECO
MICHELIN
KNORR-BREMSE
Systeme für Nutzfahrzeuge GmbH
VOSS
Mobil 美孚
BorgWarner
ALCOA
Webasto
JOST
MAHLE
TEXTAR
VOITH
Engineered Reliability
Hengst
FILTER
HENDRICKSON



SECURITY AT ALL TIMES

Active and passive safety protection put your safety first and keeps other pedestrians safe at anytime and anywhere.



Everything always in view.

A range of camera and radar including Omni-directional image enable the driver a full view, effectively raising driving safety.













Safety assistance system

ABS braking system is equipped for all models of SITRAK

According to the requirements, the braking system of SITRAK can be equipped with 4-channel ABS, 4-channel ABS+ASR+EBL, 6-channel ABS+ASR+EBL, EBS+ESC.

▸ Anti-Brake System (ABS)

During the braking process, ABS automatically controls the braking force to prevent the wheel from being locked and avoid rolling and sliding simultaneously, and to guarantee the maximum adhesion between the wheels and the ground.

▸ Electronic Brake force Limitation (EBL)

EBL is used for increasing braking force distribution based on ABS for the optimization of vehicle's braking performance.

▸ Acceleration Slip Regulation (ASR)


When the vehicle accelerates, ASR can be used to control sliding ratio within a certain range and prevent the driving wheel from slipping, especially on special road surfaces with less friction such as freezing rain and snow, and maintain its driving stability.

▸ Electronic Braking System (EBS)

Electronic Braking System (EBS), developed on the basis of ABS and ASR, can remarkably reduce the response time and braking distance of braking system. Meanwhile, it ensures consistency between axles, tractors and trailers so as to make the brake lining wear evenly in the whole vehicle combination and prolong the service life of brake lining.

▸ Electronic Stability Control (ESC)

Electronic Stability Control (ESC) can achieve anti-rollover and keep the direction of the vehicle. By measuring and calculating the transverse acceleration and critical acceleration as well as controlling engine, retarder and wheel braking, the steering stability can be achieved.

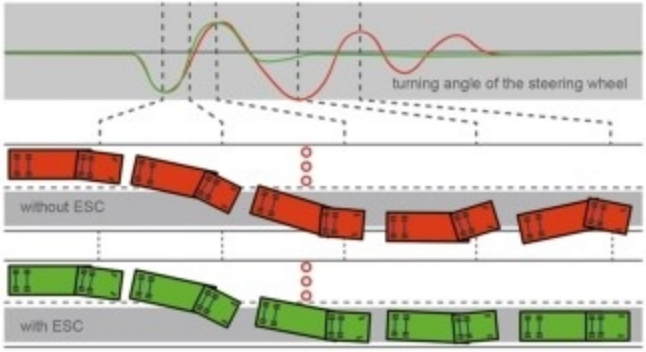

▸ Exhaust Valve Brake (EVB)

MC series of engines are standard-equipped with specially-designed EVB, which effectively raises engine braking power by precisely controlling the butterfly-valve opening of the proportional valve. The maximum EVB braking power of MC11 engine and MC13 engine can reach 255kW and 270 kW respectively.

▸ Hydrodynamic retarder

Retarder is a hydraulic continuous brake integrated on the transmission. Retarder is optional for SITRAK according to customers' demand. The driver can turn on/off the transmission with the retarder handle on the right side under the steering wheel and choose proper shift based on the actual situation. In the face of long downhill, retarder can be turned on to reduce the load of the braking system and improve driving safety.

—Your guardian angel


ADAS (advanced driver assistance system)

▸ Hill Start Assist (HSA)

Hill Start Assist (HSA) is achieved based on electronic control system to produce driving brake pressure on the wheels before the start of vehicle. Engine and transmission is monitored through CAN communication to judge if the vehicle is going to start. The brake pressure gradually disappears after the normal start of the vehicle. HSA effectively prevents the vehicle from sliding, and promotes driving safety and comfort.

▸ Adaptive Cruise Control (ACC)

With automatic braking and acceleration, Adaptive Cruise Control (ACC) can automatically control vehicle speed to keep a safe distance from the vehicle in front. ACC can be applied from 30km/h to 125km/h, helping the driver to stay relax while driving and raise comfort. In addition, the system also reduce the fuel consumption loss and loss of braking system due to unreasonable driving habit.

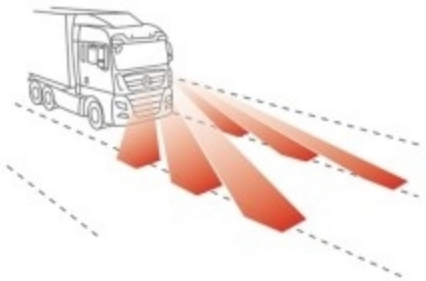


▸ Lane Departure Warning System (LDW)

Forward camera is installed under the windshield, LDW obtains lane mark information through image processing. The system monitors the lane marks on both sides of the lane respectively to ensure its position with respect to the lane and transverse velocity. Provided a driver diverges without starting the turn light, it will send out audible warning. The alarm will ring out on either side from which direction the vehicle is diverging. LDW alerts the driver to focus on the current lane and avoid traffic accident.

▸ Advanced Emergency Braking System (AEB)

Any distraction may lead to accident. Advanced Emergency Braking System (AEB) is optional for SITRAK, the system applies millimeter-wave radar installed on the front bumper to detect the speed and location information of the vehicle in front. It gives out early warning to drivers against the impending crashing to make sure they have enough time to response. Meanwhile, AEB will request braking system to guarantee sufficient air pressure in advance. And the system will brake automatically upon emergency.

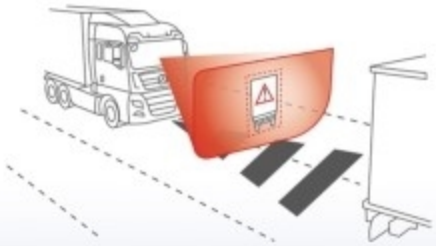




BEST SERVICE FOR YOU

- The services include vehicle inspection, maintenance, driver training, financial services, fleet management etc.
- All we do is to guarantee your SITRAK at work and make money for you.

By virtue of our reasonable distributution strategy of marketing&service team and spare parts outlets, we could provide you the most proactive, rapid and comprehensive service.

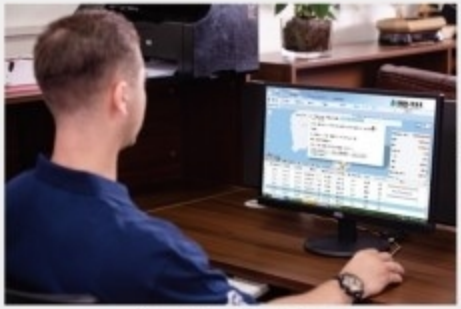

Prevention of breakdowns



Real-time support for customer repairs



Efficient management of repair and maintenance work

FREE TO CHOOSE.

C7 Cab

C7H-H



C7H-G



C7H-P



C7H-D



C7H-M



C7H-F



C7H-U



Model	Cab / Parameter	A	B	C	D	E	F	G	H	I	J	K	L	L1	M	M1
C7H-H	C7 wide body, high floor, extended type – super high roof	2130	2030	340	300	330	705	790	2440	2280	2256	2145	2200	2125	790	705
C7H-G	C7 wide body, high floor, extended type – high roof	1905	1805	340	300	330	580	690	2440	2280	2256	2145	2200	2125	790	705
C7H-P	C7 wide body, high floor, extended type – flat roof	1660	1560	340	300	330	1025	-	2440	2280	2256	2145	2200	-	790	-
C7H-D	C7 medium-wide body, low floor, medium-long type – low roof	1485	1235	320	310	300	765	-	2240	1880	2056	1770	2020	-	525	-
C7H-M	C7 medium-wide body, low floor, medium-long type – flat roof	1645	1385	320	310	300	935	-	2240	1880	2056	1770	2020	-	525	-
C7H-F	C7 medium-wide body, low floor, extended type - flat roof	1645	1385	320	310	300	923	-	2240	2280	2056	2145	2005	-	749	-
C7H-U	C7 medium-wide body, low floor, extended type – high roof	1925	1665	320	310	300	540	590	2240	2280	2056	2145	2005	2005	749	645



C5 Cab

C5H-M C5H-W C5H-V C5H-S




Model	A	B	C	D	F	G	H	I	J	K	L	L1	M	M1
C5H-M	1645	1385	325	360	935	-	2240	1880	2056	1770	2020	-	525	-
C5H-W	1645	1385	325	360	923	-	2240	2280	2056	2145	2005	-	749	-
C5H-V	1925	1665	325	360	540	590	2240	2280	2056	2145	2005	2005	749	645

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C5H-S	1645	1375	265	260	260	1140	-	2240	2865	1950	2715	2200	400	-

Model	O	P	Q	R	S	T	U	V
C5H-S	450	245	270	270	-	490	2440	505



Tractor axle configurations

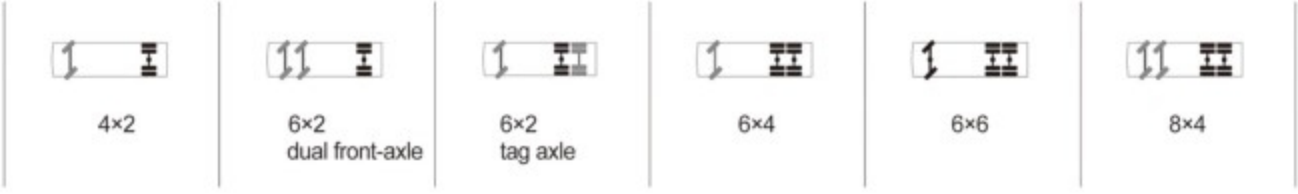




MC engine main parameters

Model	MC11.31	MC11.35	MC11.39	MC11.43	MC13.48	MC13.54
Type	Inline six-cylinder, water-cooling, four-stroke, turbocharged and intercooled, High pressure common rail					
Cylinder diameter ×stoke (mm)	120×155				126×166	
Displacement (L)	10.518				12.419	
Compression ratio	19					
Rated net power kW (PS)	228 (310)	257 (350)	287(390)	316 (430)	353 (480)	397 (540)
Rated revolution (r/min)	1900					
Maximum torque (Nm)	1550	1750	1900	2100	2300	2500
Net weight (kg)	955				975	



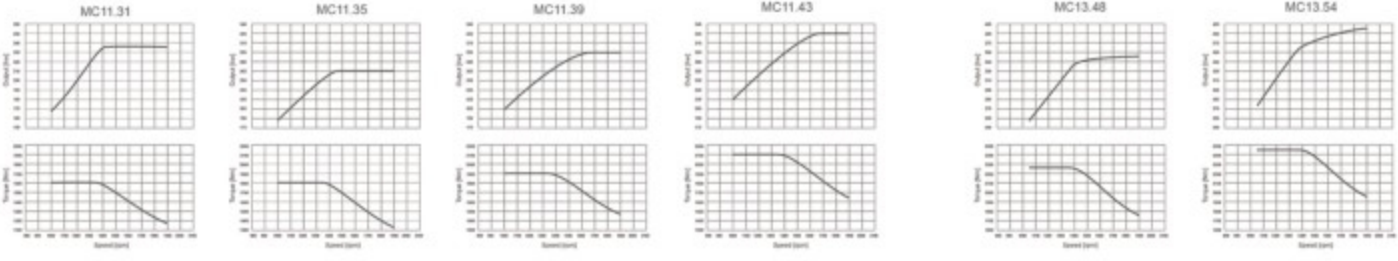

Tip: The horse power varies as the emission standard differs.