Stress in an impacting drop, and the inertial–dilatant number for 800 nm silica

Prepared for the Driscoll group, 6 August 2026. Every number regenerates from `results.py`; every equation is checked in `test_impact_stress.py` (53 tests). The analysis went through two adversarial referee passes and a numerical-code audit, and a fair amount of it changed as a result. What changed, and why, is in Appendix D. Working directory: `C:\Users\compl\Desktop\Projects\impact_stress\`

---

0. The short version

Your PI asked two things.

(1) Stress localization and stress values in an impacting drop. There is a complete closed-form answer in the literature, and one of its two key papers carries a figure taken in your own lab. The wall pressure is

$$p(r,t) \;=\; \frac{3}{\pi}\,\frac{\rho U_0^2 R}{\sqrt{d(t)^2 - r^2}}, \qquad d(t) = \sqrt{3RU_0 t}$$

a self-similar field whose maximum sits **in a ring at the moving contact line, not at the impact point**. The wall shear stress has the same structure with a stronger, 1/(distance to the rim) divergence, and is smaller than the pressure by roughly $\mathrm{Re}^{-1/2}$. For your drops that is about a factor of 5.

(2) The inertial–dilatant number. The term exists, it is one paper old, and **Michelle is a co-author**: Mobaseri, Gordillo, Burton, Yoon, Lee, Kumar, Driscoll & Cheng, *Phys. Rev. Lett.* **136**, 148201 (2026). They define

$$\mathrm{ID} \equiv \frac{F_i}{F_d} = \frac{\rho\,\kappa\,U_0}{A\,\mu_w\,\Delta\phi\,D_0}$$

For your 800 nm silica, ID $\approx 6\times10^{-5}$, roughly **220× smaller than for the cornstarch the number was built on**, because ID $\propto \kappa \propto a^2$ and your particles are 12.5× smaller. Colloidal silica sits far into the dilatant corner, and the re-entrant liquid regime that is the paper's headline is unreachable on a bench tower.

Four things worth your attention, in order of how much they matter to the group:

- **ρU_0^2 cannot measure an onset; the wall shear stress can, but only just.** ρU_0^2 runs 40–800× above σ^* across your whole velocity range, so it has no reachable threshold. The wall shear stress is 5–10× smaller and does cross σ^* near the bottom of your window. It is not a quantitative predictor: at your own calibrated parameters it puts the onset at 0.23–0.41 m/s against a measured 0.455–1.473 m/s, i.e. **systematically 1.1–6× low**. What it gives you free of every fitted constant is the *scaling* $U_c \propto \sigma^{*2/3}$, and therefore four falsifiable σ^* ratios (§5).
- **A drop hitting a bath of its own liquid feels no wall shear at all.** The interface becomes a symmetry plane. Pressure halves; shear goes to zero. If shear is what drives thickening, a suspension drop on a matched bath should not thicken at the contact, a sharp, cheap test your bath rig can already run (§4).
- **Equation 6 of the ID paper does not evaluate to 1 at the boundary it is drawn at.** ID depends on U_0 and D_0 only through U_0/D_0, which is the abscissa of their own Fig. 1(d), so the ID = 1 contour is determinate in the plotted plane, and Eq. 6 as printed puts it at $U_0/D_0 \approx 2\times10^5$ s^{-1} while the experiment spans 125–1800 s^{-1}. Two decades off the right edge of the figure. The shape is right, so it is a constant prefactor of ~150 living somewhere not on arXiv. **One email to a co-author settles it** (§7).

- **Your fitted $\dot{\gamma}_c$ is convention-bound by a factor of 4.5.** The U_0/D_0 convention your front collapse uses is the one Cheng's group refuted in PNAS last year. That does not make your number wrong; it makes it a number that must be quoted with its convention attached (§8).

---

1. Orientation: an impact is four events, not one

Your drop: 800 nm silica at $\phi = 0.44$ in water, $D_0 = 2.5$ mm, $U_0 = 2.3$ m/s (band B), on glass.

quantity	symbol	value
suspension density	$\rho = \phi\rho_p + (1-\phi)\rho_f$	1440 kg/m³
low-stress viscosity	η_0	34 mPa · s (bracket 7–34, §10)
sound speed (Wood's law)	c	1629 m/s
Reynolds number	$\rho U_0 D_0/\eta_0$	241
Weber number	$\rho U_0^2 D_0/\gamma$	265
Ohnesorge	$\eta/\sqrt{\rho\gamma D_0}$	0.067
Mach number	U_0/c	1.4×10^{-3}
gas Stokes number	$\eta_{\text{air}}/(\rho U_0 D_0)$	2.2×10^{-6}
inertial time	R/U_0	544 µs
impact time	D_0/U_0	1087 µs

Stage 0: the air cushion, before contact

The drop never touches the glass cleanly. Air cannot escape the closing gap fast enough and lifts the underside into a dimple: film thickness $\sim R\,\mathrm{St}^{2/3} \approx$ **340 nm**, radius $\sim R\,\mathrm{St}^{1/3} \approx$ **20 µm**, gas pressure $\sim \rho U_0^2 \mathrm{St}^{-1/3} \approx$ **0.6 MPa**. These are scalings with order-unity prefactors omitted, so do not quote them to better than one figure. The consequence that matters is structural: **the gas film screens the water hammer** and delays true contact.

Stage 1: the water hammer, nanoseconds

At first touch the liquid cannot get out of the way and is compressed. One-dimensional acoustics gives $p = \rho c U_0 =$ **5.4 MPa**, 700× the dynamic pressure and the largest number in the problem. It is also nearly irrelevant:

- it lasts $t_d = RU_0/2c^2 =$ **0.54 ns**
- over a contact patch of radius $RU_0/c =$ **1.8 µm**
- touching a fraction of order 10^{-9} of the drop's volume (the exact figure depends on whether you take the compressed region as a cylinder or a spherical cap; it lies between 10^{-12} and 10^{-9}, and is negligible either way).

Worth saying out loud in a talk: *the biggest stress in a drop impact is a billion times too small to matter, and the air film screens most of what is left.*

Stage 2: Wagner, the one that matters

Once the shock detaches the liquid is effectively incompressible and the flow is set by an expanding wetted disc. Force, pressure field and stress localization all live here. Derived in §2.

Stage 3: the lamella

The drop is now a spreading sheet. Pressure has collapsed; what survives is **viscous shear at the wall**. This is the stage that matters for a shear-thickening drop, and it is §5.

---

2. The pressure field, from scratch

Four lines, reproducible on a whiteboard.

Step 1. How big is the contact patch? A sphere of radius R descending at U_0 intersects the plane in a circle of radius $\sqrt{2RU_0t}$, but the free surface piles up ahead of that intersection, so the *wetted* radius is larger. Wagner's condition fixes the correction:

$$\boxed{d(t) = \sqrt{3\,R\,U_0\,t}}$$

Cheng, Sun & Gordillo write it as $r_0 = \sqrt{6DVt}/2$; with $D = 2R$ that is the same equation. Confirmed experimentally by Riboux & Gordillo and by Gordillo, Sun & Cheng.

Step 2. Replace the drop by a disc. Near the wall the flow is that of a flat disc of radius $d(t)$ pushed into a half-space at speed U_0. The potential on such a disc is classical:

$$\Phi(r,t) = -\frac{2}{\pi}U_0\sqrt{d(t)^2 - r^2}$$

Step 3. Unsteady Bernoulli. In an impact the pressure comes from the *acceleration* term, not the kinetic one:

$$p = -\rho\frac{\partial\Phi}{\partial t} = \frac{2}{\pi}\rho U_0\,\frac{d\,\dot{d}}{\sqrt{d^2 - r^2}}$$

Step 4. The trick. Because $d^2 = 3RU_0t$ is linear in t, the product $d\dot{d}$ is a *constant*:

$$d\dot{d} = \tfrac{1}{2}\frac{\mathrm{d}(d^2)}{\mathrm{d}t} = \tfrac{3}{2}RU_0$$

Substituting,

$$\boxed{p(r,t) = \frac{3}{\pi}\frac{\rho U_0^2 R}{\sqrt{d^2 - r^2}} = \underbrace{\frac{\sqrt{3}}{\pi}\rho U_0^2}_{\text{scale}}\ \underbrace{t^{*-1/2}}_{\text{amplitude}}\ \underbrace{(1-\xi^2)^{-1/2}}_{\text{shape}}}$$

with $t^* = U_0t/R$ and $\xi = r/d(t)$.

This is exactly Eq. [10] of Cheng, Sun & Gordillo (2022), prefactor included. The test suite checks the identity symbolically, and Philippi, Lagrée & Antkowiak (2016) reach the same closed form $P(\xi,0) = 3/(\pi\sqrt{3-\xi^2})$ from the full self-similar solution. As a further check, integrating this field over the wetted disc reproduces the published impact force $\tilde{F} = (3\sqrt{6}/2)\tilde{t}^{1/2}$ to three figures, tying Eq. [10] and Eq. [1] together with no shared algebra.

How to read it

- ρU_0^2 sets the stress scale.
- $t^{*-1/2}$ is the amplitude. **The earlier you look, the larger it is.** It equals ρU_0^2 at $t^* = 3/\pi^2 = 0.30$, about a third of the way through the impact.
- $(1-\xi^2)^{-1/2}$ is the shape, and **the shape is the stress localization**: flat across the middle of the contact patch, divergent at its rim.

So the maximum is **off-axis**, in an annulus racing outward with the contact line. That is the counter-intuitive part and it deserves a slide. A steady jet on a wall has its maximum at the stagnation point, because for steady flow $\partial\Phi/\partial t = 0$ and only the negative kinetic term survives. An impact is the opposite: the acceleration term dominates and is largest where the contact line sweeps fastest.

The ring is not a theoretical curiosity. It has been seen three ways: as ring cracks in zinc sulphide from 340 m/s impacts; as an off-axis peak on piezo sensors under a 2D drop; and directly, by Cheng's group, imaging the deformation of an elastic gel under an impacting drop (Sun *et al.*, *Nat. Commun.* **13**, 1703, 2022).

One caveat on the absolute value: Eq. [10] drops a constant $\frac{1}{2}\rho U_0^2$ that Eq. [9] carries. The paper calls it an absorbable choice of reference pressure, which is fine for the shape and for anything deviatoric, but it is 29% of the on-axis total at $t^* = 0.1$ and 50% of the singular part at $t^* = 0.3$. If you quote a gauge pressure late in the impact, put it back.

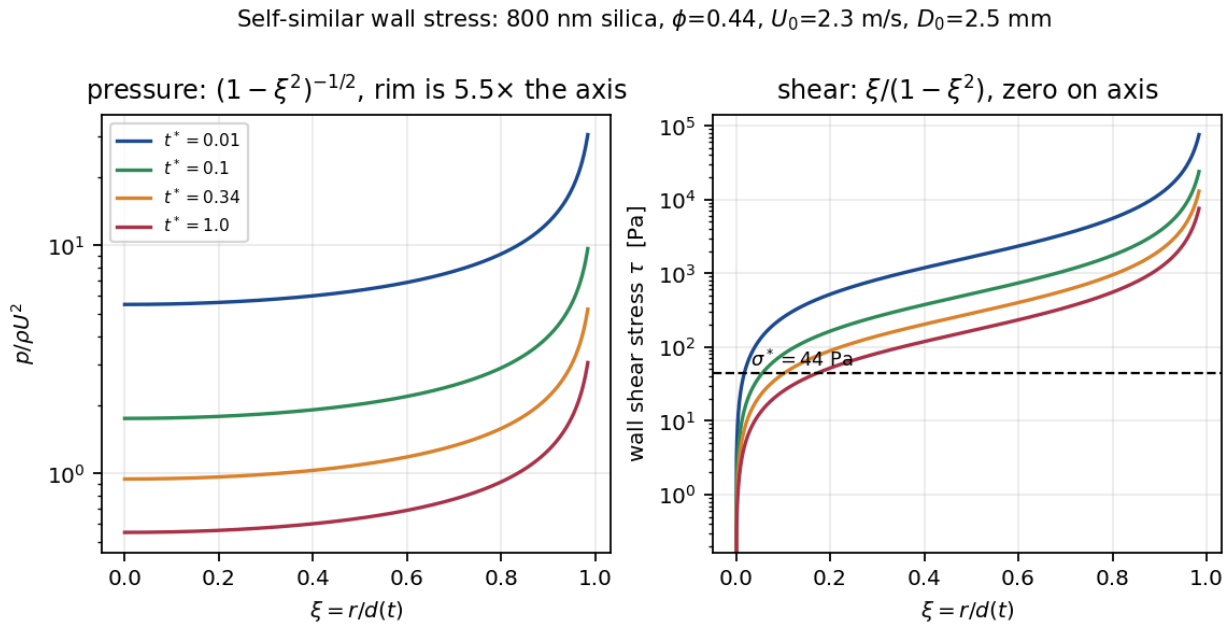


Figure 1: The self-similar wall stress. Left: pressure, shape $(1-\xi^2)^{-1/2}$, flat across the patch and divergent at the rim. Right: shear stress, shape $\xi/(1-\xi^2)$, exactly zero on the axis and more sharply peaked at the rim; the dashed line is σ^* for the silica. Each curve is one instant. The shapes are identical and only the amplitude changes.

Where the compressible stage plugs back in

Setting the on-axis Wagner pressure equal to the water-hammer pressure:

$$\frac{\sqrt{3}}{\pi}\rho U_0^2\, t^{*-1/2} = \rho c U_0 \quad\Longrightarrow\quad t^*_\times = \frac{3}{\pi^2}\mathrm{Ma}^2$$

Independently, the geometric shock-detachment argument gives $t^*_d = \mathrm{Ma}^2/2$. Two arguments sharing no algebra, agreeing to a factor 1.6. So the compressible stage is not a separate phenomenon bolted onto $t = 0$. **It is what makes the incompressible solution finite.**

---

3. Stress localization, quantified

At $U_0 = 2.3$ m/s, evaluated at the peak-force time.

stage	stress	$\div\ \rho U_0^2$	localized over	lasts
gas cushion	~0.6 MPa	~77	20 µm	0.15 µs
water hammer (rigid)	5.4 MPa	708	1.8 µm	0.0005 µs
Wagner pressure, on axis	7.5 kPa	0.98	1.2 mm	171 µs
Wagner pressure, at the rim	**42 kPa**	**5.5**	**20 µm**	171 µs
wall shear, area-averaged	1.4 kPa	0.18	1.2 mm	171 µs
wall shear, at the rim	13 kPa	1.8	20 µm	171 µs
— reference: ρU_0^2	7.6 kPa	1	—	—
— reference: σ^* (silica)	**44 Pa**	0.006	0.8 µm	—

Peak force $F_{\max} = 0.92\,\rho D_0^2 U_0^2 =$ **44 mN** at $t = 171$ µs, measurable with a piezo sensor. (The 0.92 rather than the high-Re 0.85 is the finite-Reynolds correction: a viscous drop hits *harder*, because the boundary layer speeds up the propagation of the self-similar pressure field.)

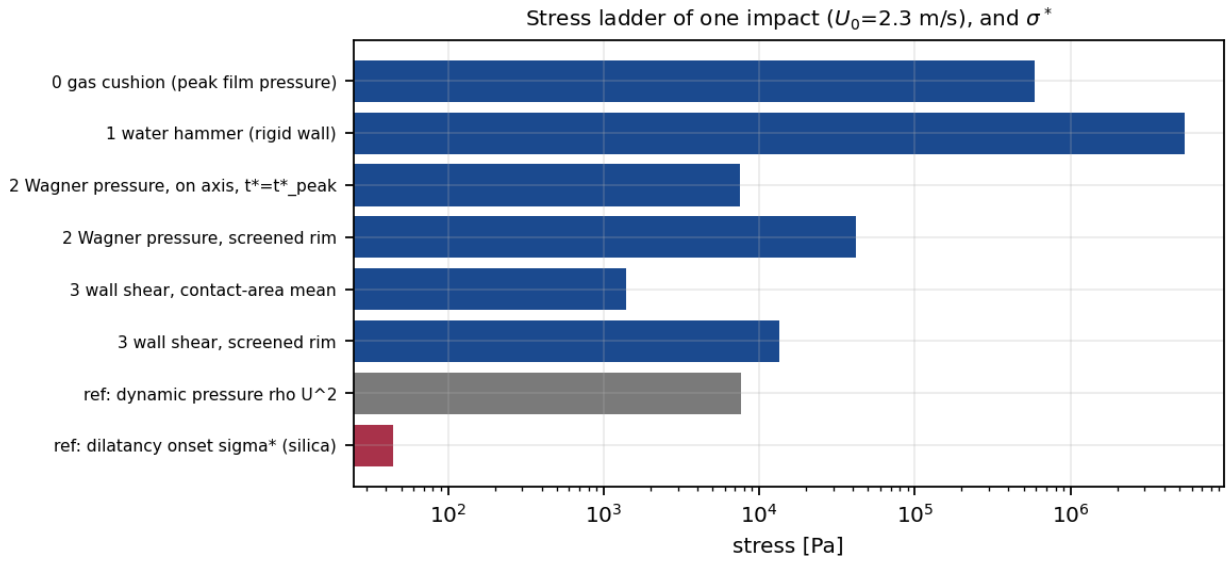


Figure 2: Every stress scale of one impact on one axis, with σ^* in red for comparison. The water hammer is the largest and the least relevant.

How firm is the rim amplification? Less firm than a single number suggests, and this is the largest soft spot in the rigid-substrate half of the analysis. The 5.5 comes from cutting the singularity off at the screening length Philippi *et al.* measured, $\Delta = 0.02\sqrt{VDt}$, which is 1.6% of the contact radius. Three problems with quoting it:

1. It is time-independent *only* because $\Delta \propto \sqrt{t}$. That proportionality is an empirical fit. Philippi *et al.* say plainly that the origin of Δ "needs to be clearly identified".
2. Their two candidate mechanisms disagree qualitatively, a viscous length gives an amplification that grows with time and depends on Re; an inertial Wagner inner layer gives one that is unbounded as $t \to 0$, and **both are excluded by their own Table 2**, which shows Δ varying by less than $2\times$ across Re 250–5000.
3. Inside their own quoted Δ range the ratio is 3.8–5.4, and below $t^* \sim 2 \times 10^{-5}$ the rim is capped by compressibility anyway.

Quote 4–6, over $5 \times 10^{-3} \lesssim t^* \lesssim 0.1$, and say the mechanism is unknown. The area-averaged shear stress is the number to lean on instead, but it is not immune either: that integral is logarithmically divergent, so it depends on Δ too, just weakly. The published prefactor (1.14) sits at the top of a defensible band 0.76–1.14, which is +8% to +31% on every onset velocity downstream.

---

4. What changes on a fluid or soft substrate

Your bath work and the Carbopol ladder live here. There are three laws, and the mistake to avoid is applying the wrong one.

(a) Compressible stage: acoustic impedance sharing

$$p = U_0 \frac{Z_1 Z_2}{Z_1 + Z_2} \qquad \Longrightarrow \qquad \frac{p}{p_{\text{rigid}}} = \frac{Z_2}{Z_1 + Z_2}$$

A rigid target recovers $\rho c U_0$; a bath of the same liquid gives **exactly one half**. This is de Haller's 1933 result, still used in the droplet-erosion literature. Note that a real glass slide is **not** acoustically rigid: fused silica has $Z = 1.3 \times 10^7$ against your suspension's 2.3×10^6, so the slide takes **15% off** the water-hammer pressure.

(b) Incompressible (Wagner) stage: inertia sharing

Redo the Wagner derivation with a target that moves. The matching condition is continuity of *pressure impulse* $\rho\Phi$, and both sides solve the same flat-disc problem and therefore carry the same universal $2/\pi$. That gives $\rho_1 u_1 = \rho_2 u_2$ with $u_1 + u_2 = U_0$, hence

$$\frac{p}{p_{\text{rigid}}} = \frac{\rho_2}{\rho_1 + \rho_2}$$

The same law with $Z \to \rho$. Two media sharing an interface share the load in proportion to their inertia: acoustic impedance when waves matter, mass density when they do not. Matched liquids give one half again.

Two things I had wrong in the first draft. First, **the factor 3 in $d^2 = 3RU_0t$ does not change** on a deformable target: each side's free surface responds with the same shape function at the same d, so the Wagner condition involves only the relative approach. Cimpeanu & Moore (*JFM* **856**, 764, 2018) Eq. (3.17) confirm it, a drop on a rigid wall and a drop on a deep pool have an identical $d(t)$. For a *curved* target it becomes a reduced radius, $1/R_{\text{eff}} = 1/R_1 + 1/R_2$. Second, their Eq. (3.13) gives the interface coefficient $(1 + V)/2$, equal to 1 at a rigid wall and 1/2 at a deep pool: a **published confirmation** of the factor 1/2 at matched density. The generalisation to $\rho_1 \neq \rho_2$ is derived here and is not published there.

Do not conflate this with $V_e = V/2$. Langley *et al.* and Bisighini *et al.* report the interface receding at $V/2$, which is the same u_1, but substituting $V \to V/2$ into the Wagner pressure would give $2^{-3/2} = 0.354$, or 0.25 on a ρV^2 gauge. The answer is 1/2 because $d(t)$ is set by the *relative* approach while the amplitude is set by u_1, so only one velocity factor is halved. This is the single most likely referee misreading.

(b') And the shear stress does something else entirely

This was missing from the first draft and it is the most consequential omission. Wall shear comes from **slip** between liquid and surface. On a liquid target both sides move tangentially, and the slip driving the Stokes layer is their difference:

$$\frac{|u_1 - u_2|}{U_0} = \frac{|\rho_2 - \rho_1|}{\rho_1 + \rho_2}$$

a drop impacting a deep bath of ITSELF feels no wall shear at all.

At matched density the interface is a symmetry plane with a slip boundary condition, Cheng, Sun & Gordillo's own Fig. 7a caption says exactly that. **The pressure halves; the shear vanishes.** For a water bath under a $\phi = 0.44$ suspension drop the density mismatch leaves only 18% of the rigid-wall slip.

(c) An elastic solid: a deflection criterion

The target deflects by $w \sim pd/E^*$, which matters once w is comparable to the gap being closed. Working it through, the deflection turns out to be time-independent while the gap grows linearly in t^*, so

$$t^* \lesssim \frac{2}{\pi}\,\mathcal{C}, \qquad \mathcal{C} = \frac{\rho U_0^2}{E^*} \quad \text{(the Cauchy number)}$$

The $2/\pi$ is real and must not be dropped. **Howland's splashing criterion is this one:** their $p_{\text{peak}} \gtrsim E$ with $p_{\text{peak}} = \rho R U/(t_{\text{ej}} - t_i)$ is algebraically $\mathcal{C} \gtrsim t^*_{\text{ej}}$, and their worked example reproduces their quoted $E_c = 93$ kPa exactly. But $\mathcal{C}$ is **necessary, not sufficient**: Yokoyama *et al.* (*Nat. Commun.* **17**, 607, 2026) show the peak force does not collapse on it alone, the inertial-to-Hertzian crossover needs a second group built from the *drop's* viscosity, and they classify the problem as self-similarity of the second kind.

(d) A yield-stress bath: J is the switch between (b) and (c)

Your Carbopol arm is already indexed on $J = \tau_y/\rho U_0^2$. In this framework J is not a stiffness. It is **the switch that decides which law applies**: $J \ll 1$, the bath yields everywhere the impact touches and behaves as a liquid, use (b); $J \gtrsim 1$, it never yields and behaves as an elastic solid, use (c).

Numbers for your targets, $U_0 = 2.3$ m/s

target	pressure, acoustic	pressure, inertial	**shear (slip)**	$\mathcal{C}$	J
rigid (idealisation)	1.00	1.00	1.00	0	—
fused-silica slide (real)	**0.85**	1.00	1.00	1×10^{-7}	—
deep water bath	0.39	0.41	**0.18**	—	—
deep bath of the same suspension	0.50	0.50	**0.00**	—	—
Carbopol, $\tau_y = 1$ Pa	0.39	0.41	0.18	—	1.3×10^{-4}
Carbopol, $\tau_y = 30$ Pa	0.39	0.41	0.18	—	3.9×10^{-3}

target	pressure, acoustic	pressure, inertial	**shear (slip)**	$\mathcal{C}$	J
PDMS gel, $E = 100$ kPa	0.38	n/a	0.20	**0.057**	—
acrylic, $E = 3$ GPa	0.43	n/a	0.10	1.9×10^{-6}	—

The "n/a" is deliberate: the inertia-sharing law is derived for a target that *flows*, so reporting it for a solid would be a silent 2.5× error. The code returns NaN there with a stated reason.

Both your Carbopol concentrations sit at $J \lesssim 4 \times 10^{-3}$, deep in the liquid-like corner: the bath yields under the impact throughout the planned ladder. Reaching $J \sim 1$ needs $\tau_y \sim \rho U_0^2 \approx 7.6$ kPa, which no Carbopol concentration in your design comes near. Worth knowing before the 20-run grid rather than after.

One caution the literature is loud about. Compliance changes the *magnitude* of the stress but, in three independent measurements, not the *localization length*: Howland finds $d = \sqrt{3RUt}$ independent of E; Sun *et al.* find the turning point and the shear maximum independent of E and of wettability; Langley finds no clear stiffness dependence below a critical value. "A softer substrate spreads the load out" is not what happens. The load gets smaller and the ejecta slow down.

---

5. The suspension question: which stress does dilatancy see?

The threshold

A dense suspension thickens when the local stress exceeds an onset stress σ^* at which the repulsion holding particles apart is overcome and contacts turn frictional. Four independent estimates for your material:

source	σ^* (Pa)
Ishibashi (2026), fitted law with a measured $F^* = 0.3$ nN	19
Lin *et al.*, *PRL* **115**, 228304 (2015), scaled by a^{-2}	63
Shah, Arora & Driscoll (2022), **your own 830 nm particles**	~100
your repo's flow-curve fit, `params_fitted.yaml`	44

Geometric mean of the three external ones: **49 Pa**. The repo's 44 Pa sits inside their range, which is the main reason to trust it as an order-of-magnitude anchor despite the fit having failed its own gate.

A subtlety that matters for how you talk about it: **Wyart & Cates write their model in particle pressure**, not shear stress, their $P^* \sim F^*/R^2$, their control parameter is $p = P/P^*$, and their Fig. 1 caption says "onset pressure $p \simeq 1$". A steady flow-curve fit cannot tell the two apart, since $\sigma/P = \mu \sim O(1)$ in simple shear. So your fitted 44 Pa is really μP^*, and P^* is 44–150 Pa. Do not assert that σ^* "is a shear stress" in front of a referee who knows the paper.

Why ρU_0^2 fails

Over your accessible velocities $\rho U_0^2 = 1.9$–36 kPa against $\sigma^* \approx 20$–100 Pa, so $\Lambda_P = \rho U_0^2/\sigma^*$ runs 43 to 814. **Every drop of every suspension is far above threshold at the slowest speed anyone can drop from.** A gauge with no reachable threshold cannot measure one. Your project reached this conclusion independently and retired the gauge; this supplies the replacement and the reason.

The right reason to use the shear stress

Not the one in my first draft. The defensible argument is about **total versus effective stress**. ρU_0^2 is a *total* stress applied to a saturated two-phase medium far faster than the pore pressure can equilibrate. Under undrained loading the pore fluid carries essentially all of an isotropic increment, so the *effective* particle pressure, the quantity that actually sets $p = P/P^*$, barely moves. What does generate effective particle pressure is shear, through Reynolds dilatancy: the packing must expand to shear, the expansion is resisted by Darcy backflow, and the resulting suction presses the particles together. So the shear stress is a **proxy for a pressure criterion, not a rival to one**, and that is what makes it consistent with the ID framework in §6 rather than in competition with it.

Philippi *et al.* solved for that shear stress; Cheng, Sun & Gordillo print it as Eq. [13]:

$$\tau(r,t) = \frac{2}{\pi^{3/2}}\,\rho U_0^2\,\mathrm{Re}_R^{-1/2}\,t^{*-1/2}\,\frac{\xi}{1-\xi^2}, \qquad \mathrm{Re}_R = \frac{\rho U_0 R}{\eta}$$

Three features carry the argument:

1. **Prefactor $\rho U_0^2 \mathrm{Re}_R^{-1/2}$.** At your $\mathrm{Re}_R \approx 121$ the area-averaged shear stress is 5.3× below the on-axis pressure and 5–10× below ρU_0^2 depending on when you evaluate it. (An earlier draft said 100×; that was wrong by an order of magnitude.)
2. **Shape $\xi/(1-\xi^2)$**, a 1/(distance to rim) divergence, sharper than the pressure's inverse square root, and **exactly zero on the axis** by symmetry. The shear maximum stays at the drop's edge for the whole impact while the pressure maximum migrates to the centre. Sun *et al.* found this same form collapsed their gel measurements best.
3. **$\tau \propto \sqrt{\eta}$, not η.** A factor-5 uncertainty in your drop's viscosity is only 2.2× in the stress, which is what makes the gauge usable despite η_0 being unresolved.

For a single robust number, integrate. Philippi's own drag force divided by the contact area gives

$$\langle\tau\rangle = C\,\rho U_0^2\,\mathrm{Re}_R^{-1/2}\,t^{*-1/2} = C\,t^{*-1/2}\sqrt{\frac{\rho\,\eta\,U_0^3}{R}}, \qquad C = 1.14 \text{ (band 0.76–1.14)}$$

and the proposed group is its ratio to the threshold:

$$\boxed{\Lambda_F = \frac{\langle\tau\rangle}{\sigma^*}}$$

Does it work? Partly, and here is the honest accounting

Evaluated at $t^* = 0.315$, the peak-force time (see §10 for why not $t^* = 1$):

U_0 (m/s)	ρU_0^2 (Pa)	Λ_P	$\langle\tau\rangle$ (Pa)	Λ_F	frictional area fraction
1.15	1904	43	496	11.2	0.93
2.3	7618	172	1403	31.7	0.99
5.0	36000	814	4498	102	1.00

Setting $\Lambda_F = 1$ gives an onset velocity

$$U_c = \left[\frac{\sigma^{*2} R\,t^*}{C^2\rho\eta}\right]^{1/3} \propto \sigma^{*\,2/3}$$

At the internally self-consistent parameter set (the repo's own $\sigma^* = 44$ Pa *and* the repo's own $\eta_0 = 34$ mPa · s, which came from the same fit), $U_c = 0.23$ m/s on the mean criterion and 0.41 m/s on the half-area criterion. Your measured onsets are **1.473 / 1.120 / 1.138 / 0.455 m/s**. So the framework is **systematically low, by 1.1× at 100 mM and by up to 6× at 0 mM.**

Across the full parameter freedom (σ^* 19–100 Pa, η_0 7–34 mPa · s, criterion, and t^*) U_c spans roughly 0.09–2.5 m/s. That range contains the data, but a 28× bracket containing a 3× spread is not a test, it would contain almost any bench measurement. Reaching 1.47 m/s requires $\sigma^* = 100$ Pa *and* the water-like viscosity *and* the loosest criterion, all three at their extreme simultaneously.

So state it this way, and no stronger: the shear gauge is the only one of the two that produces a threshold anywhere near the observed window; it lands the right order of magnitude with no fitted constants; it is systematically low by a factor of a few; and it is not a quantitative prediction.

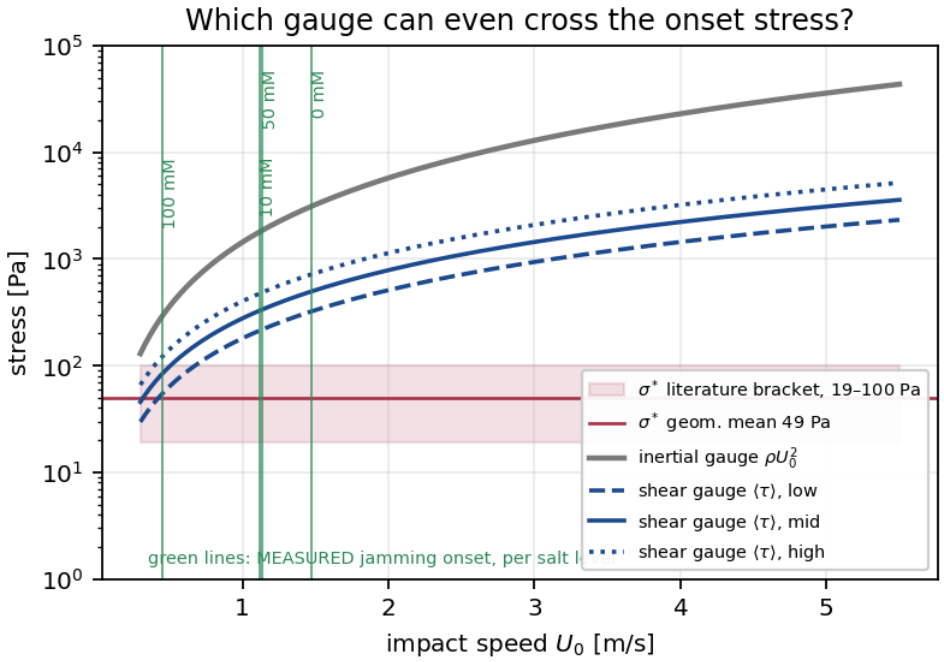


Figure 3: The inertial gauge ρU_0^2 (grey) never approaches σ^* over the accessible velocity range. The shear gauge $\langle\tau\rangle$ (blue, three viscosity choices) crosses it right where the jamming onset is measured (green lines).

The direction that is actually useful: invert it

The *scaling* $U_c \propto \sigma^{*2/3}$ carries no fitted constant, so ratios between salt levels are free of every uncertainty above, viscosity, drop size, criterion, evaluation time and prefactor all cancel:

$$\frac{\sigma^*(\text{salt})}{\sigma^*(0\ \text{mM})} = \left[\frac{u_0^*(\text{salt})}{u_0^*(0\ \text{mM})}\right]^{3/2}$$

salt	u_0^* measured (m/s)	**predicted** $\sigma^*/\sigma^*_{0\text{mM}}$
0 mM	1.473	1.00
10 mM	1.120	**0.66**
50 mM	1.138	**0.68**
100 mM	0.455	**0.17**

These four ratios are the falsifiable output of this whole analysis. They need no rheometer calibration, no absolute stress, and no assumption about your ϕ axis. Measure σ^* at the four salt levels and check them. Two features stand out and are testable: 10 mM and 50 mM are predicted indistinguishable (0.66 vs 0.68), and the drop to 100 mM is a factor of four.

Three caveats a referee will raise, so raise them first:

- **The shape is wrong for a screening curve.** $\mathrm{d}\ln u_0^*/\mathrm{d}\ln I$ is $+0.01$ from 10 to 50 mM and -1.32 from 50 to 100 mM. Constant-charge DLVO with $U_c \propto \sigma^{*2/3}$ predicts a single exponent everywhere. A flat stretch followed by a cliff looks like a *threshold*: approach to a critical coagulation concentration, not continuous barrier reduction.
- **DLVO cannot pin the number.** At constant surface *potential* the ratio comes out 0.04 (salt would *raise* σ^*, wrong sign); at constant surface *charge*, 24×. The measured 5.8 sits inside that range, so everything is carried by an unmeasured $\zeta(I)$. Matching 5.8 needs ζ falling from about -60 to -21 mV, at the very edge of published Stöber-silica values, and Li^+, being the least surface-binding alkali cation, should depress $|\zeta|$ *less* than Na^+ would.
- **The electroviscous correction makes it larger.** At the true "0 mM" ionic strength the double layer swells the particles enough to raise η_0 about 2×. Since $\sigma^* \propto U_c^{3/2}\eta^{1/2}$, the same measured velocities then imply a ratio of **8.4× rather than 5.8×**. Quote both.

One more correction worth carrying: the ionic strength of your nominal "0 mM" sample is **not** 2.5×10^{-6} M. That is CO_2-equilibrated pure water; at $\phi = 0.44$ the counterions released by the particles themselves dominate, giving $I \approx 10^{-4}$ M and $\kappa^{-1} \approx 23$ nm rather than 190 nm. The screening ratio from 0 to 100 mM is about 24×, not 200×.

Where in the drop is it frictional?

Because the shear field is known everywhere, you can locate the $\tau = \sigma^*$ contour. Solving $\xi/(1-\xi^2) = K$ gives ξ_c, and material at $\xi > \xi_c$ is above onset. **So the thickened region is an annulus hugging the rim, not a disc at the centre** (Figure 4), filling inward as the impact proceeds. That is a qualitative prediction your under-view footage can check directly, and it is a strong test: if the footage shows a central disc, the deviatoric gauge is wrong in its spatial structure regardless of its magnitude. Shah, Arora & Driscoll say in words that the solidification front must be where "the stress falls below the critical stress"; this turns that sentence into a calculable curve.

---

6. The inertial–dilatant number

What it is

From Mobaseri *et al.*, *PRL* **136**, 148201 (2026), Eq. 6. Two competing forces:

- **Inertial** (Wagner / Gordillo–Sun–Cheng): $F_i \sim \rho U_0^2 D_0^2$
- **Dilatant** (Reynolds–Darcy, after Jérôme, Vandenberghe & Forterre): the suspension must expand to shear, expansion sucks solvent inward through the pores, and Darcy resistance to that flow generates a pore suction that presses the particles together. $F_d \sim A\mu_w U_0 D_0^3 \Delta\phi/\kappa$

$$\mathrm{ID} \equiv \frac{F_i}{F_d} = \frac{\rho\kappa U_0}{A\mu_w \Delta\phi D_0} = \frac{t_d}{t_i}$$

with $\kappa = (1-\phi)^3 a^2/180\phi^2$ (Carman–Kozeny, a = particle **diameter**), $\Delta\phi = \phi - \phi_c$, $\mu_w = 1$ mPa · s, and A a granular bearing-capacity coefficient ($\beta_0 = 44 \pm 2°$, cornstarch's repose angle). ID $\ll 1$ means dilatancy wins and the impact is solid-like; ID $\gg 1$ means inertia wins and you get their re-entrant liquid regime.

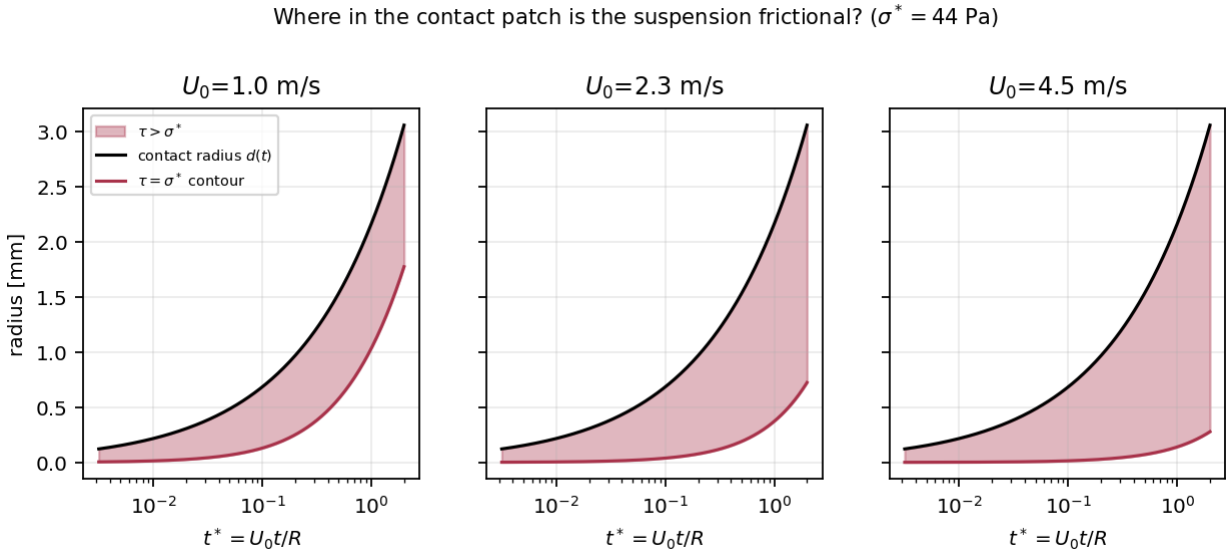


Figure 4: Where in the contact patch the suspension is above σ^* (shaded). The frictional region is an annulus at the rim that fills inward as the impact proceeds, and it appears earlier and reaches further in at higher speed.

What it gives for your silica

The one unmeasured input is ϕ_c, so here it is as a function of ϕ_c, at $U_0 = 2.3$ m/s, $D_0 = 2.5$ mm, $\phi = 0.44$, $a = 800$ nm:

ϕ_c	$\Delta\phi$	κ (m^2)	**ID**	t_d	Darcy P_f (Pa)
0.36	0.08	3.2×10^{-15}	1.2×10^{-5}	13 ns	1.4×10^{8}
0.40	0.04	3.2×10^{-15}	2.7×10^{-5}	29 ns	7.1×10^{7}
0.42	0.02	3.2×10^{-15}	5.5×10^{-5}	60 ns	3.6×10^{7}
0.43	0.01	3.2×10^{-15}	1.1×10^{-4}	122 ns	1.8×10^{7}
0.47 (Shah's value)	**−0.03**	—	**no dilatant branch at all**	—	0

Headline: ID $\approx 6 \times 10^{-5}$, about 220× smaller than cornstarch at matched conditions. The whole difference is $\kappa \propto a^2$: your particles are 12.5× smaller, so κ is 156× smaller, so Darcy resistance to dilation is 156× larger. Colloidal silica is *more* dilatant, not less.

Two consequences for the group:

- **Regime 3 is unreachable for you.** ID = 1 would need $U_0 \sim 2 \times 10^5$ m/s on the literal formula. Whatever you see at high speed is not the re-entrant liquid the paper describes.
- **The last row is a real problem, and an informative one.** If $\phi_c \approx 0.47$, what Shah, Arora & Driscoll measured on these same 830 nm particles, then at $\phi = 0.44$ your suspension is *below* the dilatancy onset, $\Delta\phi < 0$, and there is no dilatant branch for inertia to compete with. But your drops arrest and grow solidification fronts at $\phi = 0.42$–0.45. So either your ϕ axis is offset from Shah's, or ϕ_c for your particles is below 0.42. **ID is undefined for your system until ϕ_c is measured**, and running it backwards from the existence of fronts at 0.42 says $\phi_c \lesssim 0.42$. That is a number the project does not have and can get.

The same tension shows up in Wyart–Cates, and adjusting ϕ_M will not fix it

The fitted $\phi_M = 0.5176$ means that at $\phi = 0.44$ the model cannot shear-jam at any stress. The repo's own closure class refuses to instantiate at the paper's operating point for exactly this reason, which is pinned as a test. The full dynamic range available at $\phi = 0.44$ is $\eta_0 = 34 \to 211$ mPa · s, a 6× thickening, and even fully thickened Re ≈ 39, still inertial. There is no arrest available at any stress.

Three possible resolutions, not equally good:

- **Adjusting ϕ_M down does not work.** Wyart & Cates' own values are $\phi_m \approx 0.58$ and $\phi_0 \approx 0.64$; the repo's fit is displaced from both in *opposite* directions with ϕ_0 pinned at its optimizer cap, the signature of a degenerate two-parameter fit. Every literature correction moves ϕ_M *up*, making the mismatch worse.
- **A ϕ-axis offset would work but needs a large error:** +0.078 absolute, +17.6% relative. The most likely single cause is the particle density used to convert mass to volume fraction, the repo assumes $\rho_p = 2.0$ g/cm³ for porous Stöber silica, and $\rho_p = 1.70$ would do it. Your own files already carry an unresolved 1.9–2.6 g/cm³ spread on this number.
- **Frustrated dilatancy against the free surface** (Brown & Jaeger's mechanism), or confinement, is required *in any case*, because steady-state Wyart–Cates is a local constitutive law with **no front solution at any** ϕ, and a propagating solidification front is exactly what you measure.

The discriminating measurement is cheap. Vary surface tension at fixed ϕ and salt (a nonionic surfactant takes γ from 72 to 30 mN/m) and re-measure u_0^*. If the arrest threshold moves with γ, the free surface is load-bearing and the mechanism is frustrated dilatancy. If it does not, the mechanism is bulk and the ϕ axis is the problem. One afternoon, and it separates the two branches in a way the ϕ-axis measurement alone cannot.

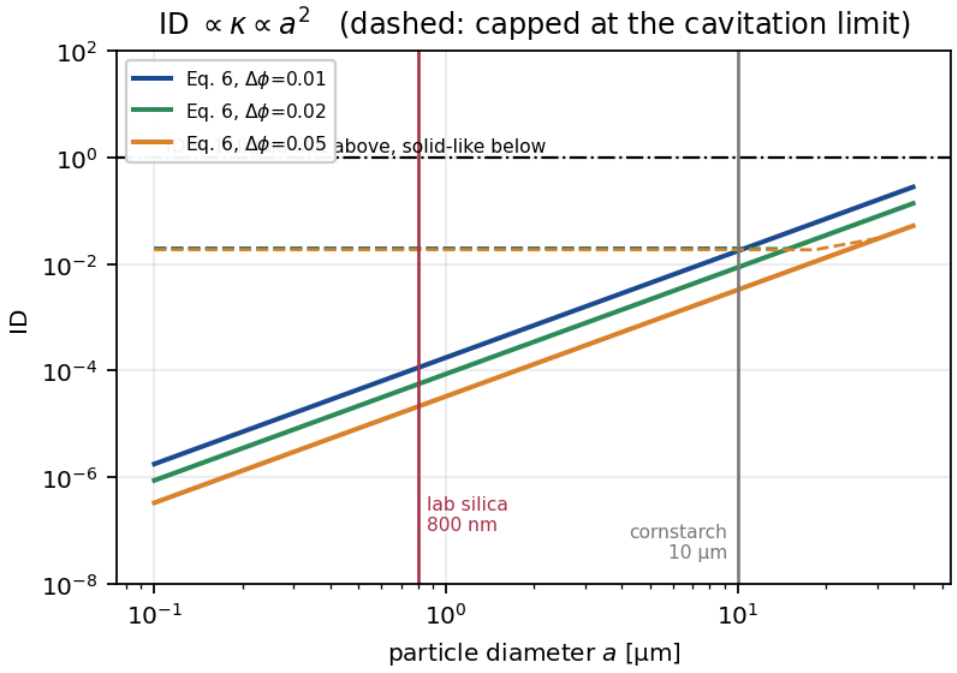


Figure 5: ID against particle size at fixed $\Delta\phi$. Solid: Eq. 6 as published, ID $\propto a^2$. Dashed: capped at the pressure the pore fluid can sustain, which removes the size dependence entirely. The two vertical lines are your silica and the paper's cornstarch.

Sensitivities

β_0 enters exponentially and is unmeasured for silica: ID varies 3× over $\beta_0 = 30$–$51°$. ϕ_c contributes 9× over the plausible range. Neither is fatal for the *ratio* between systems, which is what the headline uses.

---

7. Two problems with Eq. 6, and what does and does not fix them

Problem 1: it does not evaluate to 1 at the boundary it is drawn at

With the paper's own constants at the paper's own Regime-2/3 conditions (cornstarch, $\phi = 0.41$, $U_0 = 5.1$ m/s, $D_0 = 4$ mm, $a = 10$ µm, $\phi_c = 0.37$, $\beta_0 = 44°$): $\kappa = 6.79 \times 10^{-13}$ m², $\rho = 1226$, $A = 4.01$, $\Delta\phi = 0.04$, giving ID $= 6.6 \times 10^{-3}$. Computed twice, independently, agreeing to three figures.

The sharpest form of the objection needs no figure at all. **ID depends on U_0 and D_0 only through U_0/D_0, which is literally the abscissa of their Fig. 1(d).** So the ID = 1 contour is a determinate curve in the plotted plane, and Eq. 6 as printed puts it at $U_0/D_0 \approx 1.9 \times 10^5$ s^{-1} against an experimental range of 125–1800 s^{-1}, two decades off the right edge of the figure. A curve is nevertheless drawn inside the figure, and its *shape* is right (monotone in ϕ, rising 1.9× from $\phi = 0.41$ to 0.43). So this is a **constant prefactor of ~150, not a different functional form.**

Where does it come from? Mostly from F_d being written with "∼" after setting $r_c \sim h \sim D_0$ and $|\mathrm{d}h/\mathrm{d}t| \sim U_0$. Carried through literally, $F_d \approx 240$ N against a measured peak force of order 0.5 N. Since $F_d \propto r_c^3$ and the real r_c at the force peak is $0.49D_0$, that substitution alone buys about 27×, short of 150 by a further 5.6×. **Their fits are unaffected**, because Eq. 4 uses the measured $r_c(t)$ and $|\mathrm{d}h/\mathrm{d}t|$; it is only the scaling group that is in question, and the residual most likely sits in the Supplemental Material, which is not on arXiv.

Concretely worth asking a co-author: what is the numerical range of the ID axis in Fig. S8, and does §7A compute ID from Eq. 6 or from the measured $r_c(t)$, $h(t)$? That one answer settles it.

Problem 2: Eq. 3 predicts pore pressures that cannot exist

Look at the last column of §6's table: 10^7–10^8 Pa of Darcy suction for 800 nm particles. A pore fluid cannot do that.

I proposed capping it at what the fluid can sustain. That fix is now largely withdrawn, and it is worth seeing why, because three of the four objections are things I would not have caught alone:

1. **Wrong capillary length, and it was load-bearing.** Air invasion is set by the *pore throat*, $r_{\mathrm{throat}} \approx 0.155R_{\mathrm{particle}}$, not the particle size. Corrected, the capillary ceiling is 186 kPa for cornstarch and 2.3 MPa for silica, so it **never binds** and the ceiling is always ~1 atm for both. Then κ, a, $\Delta\phi$ and D_0 all cancel out of the capped number, and it can no longer distinguish 10 µm cornstarch from 800 nm silica, which was its entire purpose.
2. **The supporting evidence was misread.** Jérôme, Vandenberghe & Forterre measured −10 to −100 kPa in **170 µm glass beads**, where uncapped Darcy also predicts 10^4–10^5 Pa. They demonstrate no saturation. Their closing paragraph extrapolates to cornstarch and predicts "about 1–10 MPa … in good agreement with impact stress estimations in cornstarch." The cited authority asserts the opposite of what I attributed to it.
3. **One atmosphere is not a material constant.** Degassed water sustains −25 to −140 MPa. The 1 atm figure is the heterogeneous-nucleation threshold of *gas-saturated* water, a sample-preparation property, and therefore a hypothesis you can test by degassing, not a ceiling.
4. **Capping a pressure does not cap a force**, since r_c keeps growing; and once the fluid does cavitate the pack granulates and carries a capillary-cohesive stress instead.

What survives: a validity criterion, not a fudge

Jérôme *et al.* state the right condition themselves. Their Darcy–Reynolds equation assumes an incompressible pore fluid, which holds only while the pore-pressure diffusion time is short compared with the impact:

$$\frac{\tau_d}{\tau_i} = \frac{\mu_w \chi D_0 U_0}{\kappa} \propto a^{-2}$$

system	τ_d/τ_i	incompressible-Darcy valid?
cornstarch, 10 µm, their conditions	**0.014**	yes, with 70× to spare
your silica, 800 nm	**0.81**	**no — marginal at best**
your silica with 0.1% entrained gas	17.6	no, badly

This is the size-dependent statement that survives, and it is the same a^{-2} sensitivity that makes ID small for colloids, expressed as a condition on the model's validity rather than as a patch to its output. The honest conclusion about applying ID to a submicron colloid is not "the Darcy pressure saturates" but **"the Darcy limit itself stops applying"**. It also makes degassing a real experimental variable for you: 0.1% entrained gas moves silica from marginal to badly invalid.

---

8. The shear-rate convention problem

Four conventions are in print, three from Cheng's or Michelle's groups. For your drop at 2.3 m/s:

convention	source	value (1/s)
(A) U_0/D_0	Shah, Arora & Driscoll 2022 — **your fitted axis**	920
(B) $U_0/2D_0$	same paper, for $\mathrm{Re}_{\mathrm{eff}}$	460
(C) U_0/ℓ, $\ell \approx 100$ µm	same paper, for $\mathrm{Re}_{\mathrm{eff}}$	23 000
(D) U_0/L_c, $L_c = 0.986\,\mathrm{Re}^{\alpha(We)} D_0$	Mobaseri, Kumar & Cheng, *PNAS* **122**, e2500163122 (2025)	4 160

(D) is the only one validated rather than asserted: it is defined by matching the *measured* viscous dissipation integral in >1200 simulations, and the paper explicitly refutes (A), showing $L_c < 0.45 D_0$ always. For your conditions $L_c = 0.22 D_0$, so **(D) is 4.5× (A)**.

salt	$\dot\gamma_c$ as fitted, on (A)	rescaled to (D)
0 mM	632	2860
10 mM	479	2170
50 mM	471	2130
100 mM	196	885

On the rheology side, from your own calibrated Wyart–Cates parameters: $\sigma^*/\eta_0 = 1290\ \mathrm{s}^{-1}$, or $936\ \mathrm{s}^{-1}$ using the self-consistent $f = 0.5$ criterion.

Which is awkward, and I will not smooth it over: **as fitted on (A), your 632 s^{-1} agrees with the rheology-derived 936–1290 s^{-1} to within 1.5–2×. Rescaled onto the more defensible (D), it disagrees by 2–3× in the other direction.** The correction makes the agreement worse.

Three readings, and they are distinguishable: 1. L_c was calibrated for Carreau fluids on superhydrophobic surfaces. Transferring it to a jamming colloid on hydrophilic glass may not be legitimate. 2. σ^* and η_0 come

from a flow-curve fit on a ϕ axis offset from your drops'. 3. The two quantities are not the same object: L_c is a dissipation-matched average over the whole impact, while your $\dot{\gamma}_c$ is the intercept of a front-speed fit.

The actionable part is small: **whenever the fitted $\dot{\gamma}_c$ is compared with anything, state the convention.** A factor of 4.5 is larger than the salt effect you are measuring.

---

9. What this predicts, and how to test it

Ranked by cost.

1. **Free, from data you have.** The σ^* ratios in §5: 1.00 / 0.66 / 0.68 / 0.17 (or, with the electroviscous correction, a 0 : 100 mM ratio of 8.4 rather than 5.8). No fitted constant.
2. **Free, from footage you have.** The frictional region should be an **annulus at the rim**, not a central disc, filling inward as t^* grows (Figure 4). Your under-view channel can see this, and a central disc would falsify the deviatoric gauge outright.
3. **One afternoon, and it settles the biggest open question.** Surfactant sweep at fixed ϕ and salt, γ 72 $\rightarrow$ 30 mN/m. If u_0^* moves with γ, arrest is frustrated dilatancy against the free surface; if not, it is bulk and the ϕ axis is the problem (§6).
4. **One day, and it unlocks several things at once.** Thermogravimetry plus pycnometry on the *same* aliquots you drop and rheometer, to pin ρ_p independently. Bulk jamming at $\phi = 0.44$ needs $\rho_p = 1.70$ g/cm^3; your files currently span 1.9–2.6.
5. **Half a day.** $\zeta(I)$ at 0/10/50/100 mM LiCl. §5's salt inference has no content without it: the sign of $\mathrm{d}\sigma^*/\mathrm{d}I$ is set by charge regulation, and matching the observed ratio needs ζ falling from about -60 to -21 mV.
6. **Cheap, and it falsifies one of my own claims.** Degas the suspension and repeat. If a cavitation ceiling is real anywhere in this picture, degassing must move it by orders of magnitude.
7. **ϕ_c for your silica.** Without it, ID is undefined for your system.
8. **New capability, moderate cost.** A piezo force sensor. Predicted $F_{\max} = 44$ mN at $t = 171$ µs for a band-B drop, with the whole $F(t)$ curve predicted parameter-free. The 2026 paper found a regime with one that high-speed photography could not see.
9. **The bath test, and it is a clean one.** A suspension drop on a bath of its own liquid should feel *zero* wall shear. If the shear gauge is right it should not thicken at the contact; if it thickens anyway, the deviatoric gauge is not the mechanism.

---

10. What is uncertain, and by how much

quantity	value used	range	effect
σ^*	44 Pa	19–100 Pa	U_c moves 3.0× (half the total spread)
η_0	34 mPa · s	7–34 mPa · s	U_c moves 1.7× ($\tau \propto \sqrt{\eta}$ helps)
criterion ($\Lambda_F = 1$ vs half-area)	$\Lambda_F = 1$	—	U_c moves 1.8×
evaluation time t^*	0.315	0.1–3	U_c moves 3.1×
$\langle\tau\rangle$ prefactor C	1.14	0.76–1.14	U_c moves 1.3×
rim cut-off Δ	1.6% of d	factor 2, mechanism unknown	rim stresses only
ϕ_c (silica)	0.42	0.36–0.47	ID moves 9×; at 0.47, ID undefined
β_0 (silica)	44°	30–51°	ID moves 3×

quantity	value used	range	effect
ρ_p	2000 kg/m³	1900–2600 (**contested in your own files**)	every ϕ

On the evaluation time. The Wagner solution is a short-time solution; at $t^* = 1$ the contact radius is $\sqrt{3}R = 1.73R$, larger than the drop, so the formula is being used outside its domain. Everything above is evaluated at $t^* = 0.315$, the peak-force time, where $d = 0.97R$, just inside validity and the instant of maximum loading. Moving to $t^* = 1$ lowers every stress by 1.78× and raises every U_c by 1.46×. There is no principled way to remove this freedom, and it is a quarter of the total uncertainty.

Three structural caveats that are not error bars:

- **Wyart–Cates is a steady-state mean-field model.** Your impact runs ~1 ms with strain rates changing over orders of magnitude. Comparing σ to σ^* instantaneously assumes the frictional network equilibrates faster than the impact, and nobody has checked that for a drop. More sharply: **steady-state Wyart–Cates has no front solution at any** ϕ, so it cannot by itself describe the thing you measure.
- **Two frameworks are in play and must not be silently merged.** ID is a Reynolds–Darcy construct (permeability, water viscosity, a friction angle, $\Delta\phi$) with no σ^* in it; Λ_F is a Wyart–Cates construct with no permeability in it. §5 argues they are compatible, since shear generates the effective particle pressure that ID's dilatancy then resists, but that bridge is an argument, not a published result.
- **Royer, Blair & Hudson found for silica that the dilatancy onset ($\phi \approx 0.53$) and the DST onset ($\phi \approx 0.58$) are *different*,** and concluded both are consequences of friction rather than one driving the other. That is in direct tension with the ID paper's premise. Say it out loud rather than papering over it.

---

11. Presenting it

A twelve-slide arc that follows the logic:

1. The question in one line: what stress does an impact impose, where, and is it enough to thicken?
2. The four stages, with your drop's numbers.
3. **The water hammer is a red herring.** 5.4 MPa, 0.5 ns, one part in a billion of the drop.
4. Derive the Wagner pressure. Four lines. Emphasise that $d\dot{d} = \frac{3}{2}RU_0$ is constant.
5. Read the three factors. **The maximum is a ring, not a spot.** Contrast with a steady jet. (Figure 1.)
6. The stress ladder. (Figure 2.)
7. Non-rigid substrates: two pressure laws with the same structure, both giving one half for matched media, and **the shear stress goes to zero**, which the pressure laws do not tell you. Your Carbopol ladder sits at $J \lesssim 4 \times 10^{-3}$.
8. **Why ρU_0^2 can't work and the shear stress can.** (Figure 3.) The pivot of the talk. Be honest that it lands low by a factor of a few.
9. The frictional annulus, and the claim that it is the solidification front. (Figure 4.)
10. ID: what it is, whose paper it is, what it gives for silica, and the a^2 sensitivity. (Figure 5.)
11. The two problems with Eq. 6, and the poroelastic validity criterion that replaces my withdrawn fix.
12. What to test, ranked. Lead with the four prefactor-free σ^* ratios and the surfactant sweep.

Three sentences to have ready.

> *"The stress in a drop impact is concentrated in a ring at the contact line and decays as $t^{-1/2}$, so 'the impact stress' isn't a number, it's a field with a known closed form."*

> *"ρU^2 is the wrong gauge for shear thickening because it's a total stress on a saturated medium, and the pore fluid carries it. The deviatoric part is what generates effective particle pressure, it's about five times smaller, and it's the only one of the two that crosses σ^* anywhere near where we measure the onset."*
>
> *"ID for our silica is about 6×10^{-5}, roughly 220× more dilatant than the cornstarch it was built for, purely because permeability goes as a^2, but at 800 nm the pore fluid stops being incompressible over the impact time, so we're using the model at the edge of its derivation."*

If asked "is this published?" The stress field, yes, thoroughly. The impedance/inertia pairing repackages results that are in print, and the matched-density factor of 1/2 is published. The shear-sharing law, the $\tau = \sigma^*$ contour and Λ_F are new here and have not been refereed by anyone but the agents that audited them.

If asked "how sure are you?" Point at §10. The phrase to use is *"the scaling is solid, the prefactors are order-unity uncertain, and the ratios are the part that carries no fitted constants."*

Appendix A: symbols

symbol	meaning	units
R, $D_0 = 2R$	drop radius, diameter	m
U_0	impact speed	m/s
$t^* = U_0 t/R$	dimensionless time, **radius clock**	—
$\tilde{t} = U_0 t/D_0 = t^*/2$	dimensionless time, **diameter clock** (Cheng's)	—
$d(t) = \sqrt{3RU_0 t}$	wetted / turning-line radius	m
$\xi = r/d(t)$	self-similar radial coordinate	—
$Z = \rho c$	acoustic impedance	Pa · s/m
$\mathrm{Re}_R = \rho U_0 R/\eta$	radius-based Reynolds number (= Re/2)	—
σ^*, P^*	dilatancy onset shear stress / particle pressure	Pa
Λ_F	$\langle\tau\rangle/\sigma^*$, the proposed shear gauge	—
κ	permeability, $(1-\phi)^3 a^2/180\phi^2$	m²
$\Delta\phi = \phi - \phi_c$	distance past the dilatancy onset	—
ID	inertial–dilatant number	—
$\mathcal{C} = \rho U_0^2/E^*$	Cauchy number (substrate compliance)	—
$J = \tau_y/\rho U_0^2$	yield number	—
τ_d/τ_i	pore-pressure diffusion time ÷ impact time	—

Three traps. (i) Every factor-of-2 confusion in this subject is the t^* / $\tilde{t}$ clock. (ii) a is a *radius* in the Wyart–Cates literature and a *diameter* in Carman–Kozeny; the code keeps them in separate classes for that reason. (iii) Wyart–Cates is written in particle pressure, not shear stress.

Appendix B: sources actually read

Cheng, Sun & Gordillo, *Annu. Rev. Fluid Mech.* **54**, 57 (2022) · Philippi, Lagrée & Antkowiak, *JFM* **795**, 96 (2016), arXiv:1504.05847 · Mobaseri, Gordillo, Burton, Yoon, Lee, Kumar, Driscoll & Cheng, *PRL* **136**, 148201 (2026), arXiv:2601.12642 · Mobaseri, Kumar & Cheng, *PNAS* **122**, e2500163122 (2025) · Shah, Arora & Driscoll, *Commun. Phys.* **5**, 222 (2022) · Sun, Álvarez-Novoa, Andrade, Gutiérrez, Gordillo &

Cheng, *Nat. Commun.* **13**, 1703 (2022) · Gordillo, Sun & Cheng, *JFM* **840**, 190 (2018) · Cimpeanu & Moore, *JFM* **856**, 764 (2018) · Howland *et al.*, *PRL* **117**, 184502 (2016) · Yokoyama, Maruoka & Tagawa, *Nat. Commun.* **17**, 607 (2026) · Riboux & Gordillo, *PRL* **113**, 024507 (2014) · Mandre & Brenner, *JFM* **690**, 148 (2012) · Jérôme, Vandenberghe & Forterre, *PRL* **117**, 098003 (2016) · Jørgensen, Forterre & Lhuissier, *JFM* **896**, A28 (2020) · Pegg, Purvis & Korobkin, *JFM* **839**, 561 (2018) · Langley, Castrejón-Pita & Thoroddsen, *Soft Matter* **16**, 5702 (2020) · Bisighini, Cossali, Tropea & Roisman, *PRE* **82**, 036319 (2010) · Wyart & Cates, *PRL* **112**, 098302 (2014), arXiv:1311.4099 · Royer, Blair & Hudson, *PRL* **116**, 188301 (2016) · Guy, Hermes & Poon, *PRL* **115**, 088304 (2015) · Brown & Jaeger, *Rep. Prog. Phys.* **77**, 046602 (2014) · Ness, Seto & Mari, *Annu. Rev. Condens. Matter Phys.* **13**, 97 (2022) · Athani, Metzger, Forterre & Mari, *PRF* **10**, 043301 (2025).

Two citation corrections worth carrying: the short-time self-similarity paper is Philippi, Lagrée & **Antkowiak** (not Josserand), and the number is **inertial–dilatant**, not "inertio-dilatant", which appears nowhere in the literature.

Appendix C: how to rerun

```
cd C:\Users\compl\Desktop\Projects\impact_stress
python -m pytest test_impact_stress.py -q      # 53 tests
python results.py                              # out/results.json + figures/
```

file	holds
`materials.py`	fluids, Wyart–Cates, your calibrated silica, provenance and caveats
`stress.py`	the four stages; Wagner pressure, wall shear, force, the compliance and sharing laws
`dilatancy.py`	Λ_P, Λ_F, the $\tau = \sigma^*$ contour, onset velocity
`inertial_dilatant.py`	ID as published, the withdrawn cap, and the poroelastic validity criterion
`conventions.py`	the four shear-rate conventions and L_c
`results.py`	every number and figure in this document

Validation, in increasing order of what it proves: **limits** (rigid $\to \rho cU$, matched $\to \frac{1}{2}\rho cU$, matched-density shear $\to 0$); **identities** (dimensional and self-similar forms agree); **literature** (Cheng's Eqs. [10] and [13] coded independently from the paper and asserted equal to ours); **cross-checks**, integrating the pressure field reproduces the published impact force to three figures; rebuilding the shear field from an independent Stokes-layer argument reproduces Eq. [13] to machine precision; the compressible crossover from two unrelated arguments agrees to 1.6×; our Wyart–Cates matches the repo's own closure to 10^{-12}.

Appendix D: what changed under review

Two adversarial referee passes and a code audit ran against the first draft. Here is what they moved, so you can see which parts have been stress-tested and which have not.

Confirmed exactly, no change: the Wagner pressure identity against Cheng's Eq. [10]; the wall-shear identity against Eq. [13], verified three ways including against the primary source and an independent Stokes-layer derivation; the contact-radius conversion; the finite-Re force correction; Wood's law; the Wyart–Cates implementation against the repo's own closure.

Real bugs found and fixed: - Cheng's Eq. [4] was transcribed **inverted**, so the peak force had the wrong Reynolds trend (0.79 instead of 0.92 at your conditions, and the wrong *sign* of the trend at low Re). No test covered `peak_force`; two now do. - The capped-ID number carried a factor π that Eq. 6 does not, so it failed to reduce to ID in the limit where it must. - The inertia-sharing factor was being reported for elastic solids, where it does not apply, a silent 2.5× error. It now returns NaN with a stated reason. - The advertised viscosity "bracket" had its high entry *below* its middle one.

Claims corrected or withdrawn: - "ρU^2 is wrong by ~100×" → it is wrong by 5–10×. - "σ^* is a shear stress and pressure doesn't build force chains" → backwards relative to Wyart & Cates, who write in particle pressure. Replaced with the total-versus-effective-stress argument, which reaches the same conclusion defensibly. - "The mean-shear integral converges, so it is cut-off-insensitive" → it diverges logarithmically. The prefactor now carries a band. - "Rim amplification 5.5×, at all times" → 4–6, over a limited window, mechanism unknown. - "The Wagner factor 3 changes on a deformable target" → it does not; Cimpeanu & Moore show $d(t)$ is identical for a rigid wall and a deep pool. - "Glass is within 0.1% of acoustically rigid" → it takes 15% off. - **The capped-ID extension is largely withdrawn.** The premise survives; the fix does not, for four independent reasons (§7). Replaced with the poroelastic validity criterion, which is the source's own. - The onset-velocity comparison was presented as a bracketing success; it is a factor-of-a-few under-prediction inside a bracket wide enough to contain almost anything. §5 now says so.

Added because a referee pointed out it was missing: the shear-sharing law (§4b'), which turns out to be the sharpest prediction in the document; the Howland identity; the electroviscous correction to the salt inference; the counterion-dominated ionic strength; the surfactant-sweep experiment.

Appendix E: worked example — ID for the 800 nm silica at "0.44", every number shown

This appendix does the arithmetic of §6 by hand, one line at a time, so the calculation can be repeated on a napkin. Every intermediate value below is asserted against `inertial_dilatant.py` and matches the table in §6.

E.1 First decide what "0.44" is, because mass and volume fraction give different answers

Eq. 6 wants the particle **volume** fraction ϕ. Samples are usually made up by **mass** fraction w. The conversion is

$$\phi \;=\; \frac{w/\rho_p}{w/\rho_p + (1-w)/\rho_f}$$

With $w = 0.44$, $\rho_p = 2.0$ g/cm³ (porous Stöber silica, the repo's calibration value) and $\rho_f = 1.0$ g/cm³:

$$\phi = \frac{0.44/2.0}{0.44/2.0 + 0.56/1.0} = \frac{0.220}{0.220 + 0.560} = \frac{0.220}{0.780} = 0.282$$

The particle density moves this: $\rho_p = 1.7$ gives $\phi = 0.316$, and $\rho_p = 2.2$ gives $\phi = 0.263$, and the project's own files carry an unresolved 1.9–2.6 g/cm³ spread on ρ_p (§6). So a mass fraction of 0.44 means a volume fraction somewhere in 0.26–0.32 — and **every candidate value of the dilatancy onset ϕ_c (0.36 to 0.47, §6) sits above that entire range.** Then $\Delta\phi < 0$, the Reynolds–Darcy branch does not exist, there is no dilatant force for inertia to compete with, and ID is not small — it is **undefined**. The code returns ∞ by convention: inertia wins by default, the impact is liquid-like at any speed, and Eq. 6 has nothing to say.

That is the complete answer if 0.44 really is a mass fraction. The interesting case — and the one every number in §6 refers to — is $\phi = 0.44$ as a **volume** fraction, which at $\rho_p = 2.0$ corresponds to

$$w = \frac{\phi\,\rho_p}{\phi\,\rho_p + (1-\phi)\,\rho_f} = \frac{0.88}{0.88 + 0.56} = 0.611$$

i.e. a 61 wt% sample. The rest of the appendix works that case.

E.2 Inputs, with provenance

input	value	where it comes from
ϕ	0.44	the lab's salt-axis pivot (volume fraction)
ϕ_c	0.42	the one unmeasured input; 0.42 is implied by the lab's own fronts at $\phi = 0.42$ (§6)
a	8.0×10^{-7} m	particle **diameter**; Carman–Kozeny wants the diameter, not the radius
ρ_p, ρ_f	2000, 1000 kg/m^3	repo calibration; solvent taken as water
μ_w	1.0×10^{-3} Pa · s	pore-fluid (solvent) viscosity, as fixed in the paper
α	1	$\tan\Psi = \alpha\,\Delta\phi$, the paper's choice
β_0	44°	cornstarch's repose angle, carried over; unmeasured for silica (§6 sensitivities)
U_0, D_0	2.3 m/s, 2.5 mm	the lab's impact conditions

E.3 Five steps to the number

Step 1 — suspension density, by volume mixing:

$$\rho = \phi\rho_p + (1-\phi)\rho_f = 0.44 \times 2000 + 0.56 \times 1000 = 880 + 560 = 1440 \text{ kg/m}^3$$

Step 2 — Carman–Kozeny permeability. With a the particle diameter:

$$\kappa = \frac{(1-\phi)^3 a^2}{180\,\phi^2} = \frac{(0.56)^3\,(8.0\times10^{-7})^2}{180 \times (0.44)^2} = \frac{0.1756 \times 6.40 \times 10^{-13}}{34.85} = 3.23 \times 10^{-15} \text{ m}^2$$

This is the step where the particle size enters, squared, and it is the whole story: cornstarch at $a = 10$ µm has κ larger by $(10/0.8)^2 = 156$.

Step 3 — distance past onset and dilation angle:

$$\Delta\phi = \phi - \phi_c = 0.44 - 0.42 = 0.02, \qquad \tan\Psi = \alpha\,\Delta\phi = 0.02$$

Step 4 — bearing-capacity coefficient (the paper's Eq. 5):

$$\tan\beta = \tan\beta_0 + \tan\Psi = 0.9657 + 0.020 = 0.9857 \;\Rightarrow\; \beta = 44.6°,\ \sin\beta = 0.702$$

$$A = \frac{1-\sin\beta}{1+\sin\beta}\,e^{\pi\tan\beta} = \frac{0.298}{1.702} \times e^{3.097} = 0.1752 \times 22.1 = 3.87$$

Step 5 — assemble Eq. 6. Numerator and denominator both come out in kg/s, so the ratio is dimensionless as it must be:

$$\rho\,\kappa\,U_0 = 1440 \times 3.23 \times 10^{-15} \times 2.3 = 1.07 \times 10^{-11} \text{ kg/s}$$

$$A\,\mu_w\,\Delta\phi\,D_0 = 3.87 \times (1.0 \times 10^{-3}) \times 0.02 \times (2.5 \times 10^{-3}) = 1.94 \times 10^{-7}\ \text{kg/s}$$

$$\boxed{\text{ID} = \frac{1.07 \times 10^{-11}}{1.94 \times 10^{-7}} = 5.5 \times 10^{-5}}$$

which is the $\phi_c = 0.42$ row of the table in §6 and the source of the headline ID $\approx 6 \times 10^{-5}$.

E.4 Cross-check by the timescale route

ID is also t_d/t_i, computed from different groupings of the same inputs:

$$t_i = D_0/U_0 = 2.5 \times 10^{-3}/2.3 = 1.09 \times 10^{-3}\ \text{s} \qquad (1.09\ \text{ms})$$

$$t_d = \frac{\rho\,\kappa}{A\,\mu_w\,\Delta\phi} = \frac{1440 \times 3.23 \times 10^{-15}}{3.87 \times (1.0 \times 10^{-3}) \times 0.02} = 6.0 \times 10^{-8}\ \text{s} \qquad (60\ \text{ns})$$

$$t_d/t_i = 6.0 \times 10^{-8}/1.09 \times 10^{-3} = 5.5 \times 10^{-5}\ \checkmark$$

The physical reading: the dilatant (Darcy) force develops in 60 ns, the inertial force needs a millisecond, so dilatancy is fully established five decades before inertia can compete. Deeply solid-like, on the paper's own axis.

E.5 What to trust about it

- **The exponent, not the prefactor.** Eq. 6 carries the $r_c \sim h \sim D_0$ substitutions and an uncalibrated overall constant of order 150 (§7, Problem 1). Quote ID *ratios* between systems, which are prefactor-free; do not read 5.5×10^{-5} against 1 as if the threshold were calibrated.
- **ϕ_c is the soft input.** The same arithmetic gives 1.2×10^{-5} at $\phi_c = 0.36$ and 1.1×10^{-4} at $\phi_c = 0.43$ — a factor 9 — and no answer at all at Shah's $\phi_c = 0.47$ (§6). Nothing in this appendix survives ϕ_c being above 0.44.
- **The Darcy premise is marginal here.** The poroelastic validity ratio for this system is $\tau_d/\tau_i = 0.81$ (§7, Problem 2), so Eq. 6 is being evaluated at the edge of its own derivation for 800 nm particles. That caveat belongs next to the number whenever it is quoted.

To regenerate: `lab_silica_dilatant(phi=0.44, phi_c=0.42)` and `ID(sys, 2.3, 2.5e-3)` in `inertial_dilatant.py`. The mass–volume conversion is two lines of arithmetic; it is written out above so it does not have to be redone from memory.