Towards the Optimal Bidet: A Fluid Mechanical Framework for Nozzle Design and Flow Parameter Optimization

Charlie Burton*
Department of Physics and Astronomy, Northwestern University
(Dated: September 8, 2026)

Although bidets have been in commercial production for decades, and the mechanics of surface cleaning by impinging jets is well studied, we are not aware of a treatment that frames bidet nozzle design as an explicit water-minimization optimization. We develop such a framework using Watson's (1964) axisymmetric wall-jet solution, and close it with a purpose-built computational-fluid-dynamics (CFD) simulation of the turbulent impinging jet. An axisymmetric, wall-resolved ($y^+ \lesssim 1$) k–ω SST computation of a $d = 1\,\mathrm{mm}$ round jet impinging on a flat plate, swept over $\mathrm{Re}_d \in [3\times10^3, 3\times10^4]$ and $H/d \in [1, 60]$, yields a wall-shear closure of Phares (2000) form, $(\tau_w/\rho V_0^2)\,\mathrm{Re}_d^{1/2} = C_P\,(r/d)^{-n_t}$, with $n_t \approx 1.90$ and $C_P \approx 1.35$ at the nominal point ($r^2 = 0.997$); the free-jet centreline decay and grid independence are verified against Hussein, Capp & George (1994). The computed decay $\tau_w \propto r^{-1.90}$ is far shallower than the laminar Watson Region II asymptotic (r^{-5}), confirming that the cleaning constraint must be evaluated with the turbulent closure rather than the laminar similarity law. Under this closure the minimum flow rate depends only weakly on supply pressure ($Q^* \propto \Delta P^{-0.57}$, versus the pressure-independent laminar-asymptotic result) but strongly on the cleaning shear ($Q^* \propto \tau_c^{1.43}$), so τ_c is the dominant design uncertainty. At $\mathrm{Re}_d = 10^4$ (i.e. $\Delta P \approx 42\,\mathrm{kPa}$, $r_{\max} = 15\,\mathrm{mm}$) the CFD gives $\tau_w(r_{\max}) \approx 6.0\,\mathrm{Pa}$ for the commercial $d = 1\,\mathrm{mm}$ nozzle, rising to $\approx 8.7\,\mathrm{Pa}$ at $\Delta P = 0.07\,\mathrm{MPa}$. Against an assumed $\tau_c = 1$–$10\,\mathrm{Pa}$ the commercial nozzle cleans to $r \approx 35, 21, 16, 12\,\mathrm{mm}$ at $\tau_c = 1, 3, 5, 10\,\mathrm{Pa}$, every one of them resolved inside a 50 mm radial domain: mainstream designs sit within a factor of ~ 2 of the cleaning constraint over $\tau_c \gtrsim 3\,\mathrm{Pa}$, near-optimal at the upper τ_c, and are 2.3× over-provisioned at $\tau_c = 1\,\mathrm{Pa}$ — so "optimal" is τ_c-contingent, not absolute. Correcting an earlier analytic claim, the CFD shows the far-field wall shear at the cleaning radius is set by the jet's conserved momentum flux, not by centreline-velocity decay, so $\tau_w(r_{\max})$ is nearly standoff-independent (5.6–6.8 Pa over $H/d = 1$–20): standoff is a *weak* lever for a coherent jet, not the 4.6× penalty a naive free-jet-decay argument predicts. We further show that (i) oblique impingement imposes a geometric $\sec\theta$-type penalty that, propagated through the turbulent closure, costs $\sim 95\,\%$ extra flow at the commercial 43° angle; and (ii) a $\pm15°$ oscillating sweep at $H = 80\,\mathrm{mm}$ reduces water consumption by $\sim 52\,\%$ relative to a steady jet (with a dwell-time uniformity factor $\kappa = 2/\pi$ from the arcsine law of a sinusoidal sweep). The computation models a single coherent liquid phase and does not resolve jet break-up/atomization; the multiphase, free-surface extension is scoped as future work. A companion paper [5] develops the public-health, tribological, and policy case for adoption that this optimization framework supports; reduced-order, CFD, and benchtop verification paths suitable for a workstation-scale follow-up are scoped in Sec. XIII.

I. INTRODUCTION

The bidet water jet is, from a fluid mechanical standpoint, an axisymmetric turbulent jet that impinges on a curved biological surface and must deliver enough wall shear stress to detach and advectively remove fecal residue. The physics of impinging jets — free-jet development, stagnation flow, wall-jet spreading, hydraulic jump [3, 4], and the resulting wall shear distribution — has been studied extensively in industrial cleaning, turbine cooling, and jet-impingement heat transfer [17]. The classical wall-jet solution of Watson [14] provides the analytical backbone for the spreading film, and it underpins a substantial literature on surface *cleaning* by impinging jets, in which a wall-shear detachment criterion sets the cleaned radius for tank walls and food-soil layers [2, 15]. To the authors' knowledge, however, this wall-shear framework has not been turned into an explicit *minimum-water* nozzle optimization for bidet cleansing, which is the gap this paper addresses.

This paper addresses that gap. We formulate the bidet nozzle problem as a constrained optimization: given the perianal contamination geometry, fecal adhesion strength, and household supply-pressure envelope, what nozzle diameter minimizes water consumption while guaranteeing complete coverage? We then extend the framework to oblique impingement (forced by the geometry of toilet-seat hardware) and to oscillating jets (a feature of premium products such as the TOTO Washlet).

A subtlety that we treat carefully is the regime of validity of Watson's solution. Watson partitions the flow into Region I (laminar boundary layer growing on the plate, with the outer film inviscid) and Region II (viscous-dominated film, boundary layer spanning the entire depth), with the transition radius r_0 at which the two layers meet. *For bidet parameters the cleaning ra-*

* cpb@u.northwestern.edu

dius lies in Region II, not Region I. This has two consequences: the wall shear used for the cleaning criterion must be the Region II asymptotic, not the Region I formula; and the standoff dependence enters non-trivially through free-jet decay before impingement. Both are addressed below.

The paper is organized as follows. Section II establishes the geometry, design variables, and constraints. Section III derives Watson's solution in both regions, explicitly checking dimensions and matching conditions, and quotes the empirical correlation of Phares et al. [10] as a validation cross-check. Sections IV and V solve the two optimization problems. Section VI traces the Pareto frontier in the (Q, r_{clean}) plane. Section VII treats standoff dependence honestly. Sections VIII and IX treat oblique and oscillating jets. Section X reports numerical optima. Section XI discusses limitations; Section XII concludes.

II. PROBLEM FORMULATION

A. Geometry and Notation

We model the target surface as a hemi-cylindrical concave surface of radius $R \approx 15$–$25\,\text{mm}$ centred at the anal verge. As shown in Figure 1, the bidet nozzle is at standoff H above the surface apex, along the symmetry axis. In the baseline configuration, the jet is directed normally toward the apex ($\theta = 0$).

Fecal residue is deposited as a thin film on the concave surface, distributed within a contamination zone of radius $r_{\max} \approx 10$–$20\,\text{mm}$ measured from the apex along the surface. The cleaning criterion requires that the wall shear stress $\tau_w(r)$ exceed the critical detachment shear τ_c everywhere within the zone:

$$\tau_w(r) \geq \tau_c \qquad \forall\, r \in [0,\, r_{\max}]. \tag{1}$$

We adopt $\tau_c \approx 1$–$10\,\text{Pa}$ for fecal residue. This range is anchored by direct wall-detachment measurements rather than by bulk rheology: Nejadnik et al. [13] report a hydrodynamic wall shear of 1–3 Pa at the attachment/detachment balance for soft biological (bacterial) soils in a flow-displacement chamber, and Gião & Keevil [12] bracket it from above at ~ 24–$144\,\text{Pa}$ for the removal of consolidated biofilm; the hygienic-design detachment criteria of the EHEDG [8] are consistent with this window. We stress that τ_c is an explicit modelling assumption — it is not fecal-specific — and that the bulk yield stress of human faeces [16] is a distinct (bulk-rheology, not wall-detachment) quantity that we do not equate with τ_c. The dimensionless design levers (oblique, oscillation, standoff) are ratios and largely independent of τ_c; the *absolute* minimum flow, however, is a strong function of it ($Q^* \propto \tau_c^{1.43}$ under the operative turbulent closure, Sec. IV), so we treat τ_c as an explicit assumption and report its consequences across the 1–10 Pa band rather than at a single value.

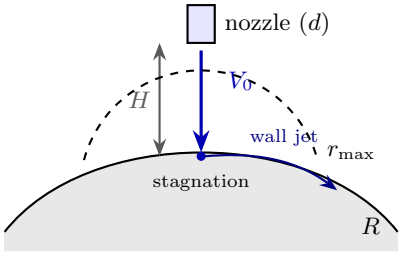


FIG. 1. Schematic cross-section of the bidet impingement geometry. The nozzle (diameter d, exit velocity V_0) is at standoff H above the apex of the concave hemi-cylindrical surface (radius R). The impinging jet forms a stagnation zone and a spreading wall jet that must exceed τ_c throughout the contamination zone of radius $r_{\max}$ (dashed arc).

B. Design Variables

The independent design variables are: the nozzle orifice diameter $d = 2a$; the supply gauge pressure ΔP (set by household plumbing, typically 0.05–0.10 MPa); the standoff H; and the impingement angle θ (zero in the baseline). The exit velocity is set by Torricelli's relation,

$$V_0 = C_v \sqrt{\frac{2\,\Delta P}{\rho}}, \tag{2}$$

with $\rho = 1000\,\text{kg/m}^3$ and velocity coefficient $C_v \approx 0.97$. The volumetric flow rate is $Q = C_d\,(\pi/4)\,d^2 V_0 = C_d \pi a^2 V_0$, where $C_d \approx 0.62$ is the discharge coefficient for a sharp-edged orifice. We carry C_d explicitly in every *physical* flow rate quoted below (and in the comparison with commercial products); the discharge factor rescales the absolute Q uniformly and does not affect any scaling exponent, so for compactness the scaling derivations are written with the geometric group $\pi a^2 V_0$ and C_d reinstated at the point of numerical evaluation.

C. Constraints

a. C1: Turbulent impingement. The Watson wall-jet solution applies in the high-Reynolds limit. We require $\text{Re}_d = V_0 d/\nu \geq 3{,}000$, with $\nu = 8.9 \times 10^{-7}\,\text{m}^2/\text{s}$ for water at 25 °C. This sets a minimum nozzle size at fixed pressure.

b. C2: Jet coherence. The jet must arrive at the surface as a continuous liquid column. Capillary breakup scales as $L_{\text{break}} \approx 12\,\text{We}^{1/2} d$ [9] with $\text{We} = \rho V_0^2 d/\sigma$ and $\sigma = 0.072\,\text{N/m}$. We require $H < L_{\text{break}}$.

c. C3: Supply pressure ceiling. $\Delta P \leq \Delta P_{\max}$.

D. Objective Functions

P1 (water minimization, fixed ΔP):: Given ΔP, minimize $Q = \pi a^2 V_0$ subject to (1) and C1–C2.

P2 (coverage maximization, fixed Q):: Given Q and a pressure ceiling $\Delta P_{\max}$, maximize r_{clean} subject to C1–C3.

III. FLUID MECHANICAL FOUNDATION

A. Watson's Two-Region Wall-Jet Solution

After impingement, an axisymmetric film spreads radially over the surface. Watson [14] divides this flow into two regions. In Region I ($r \le r_0$), a viscous boundary layer of thickness $\delta(r)$ grows from the wall while the outer film $\delta < z < h$ remains inviscid at velocity $U_s = V_0$. In Region II ($r > r_0$), the boundary layer has grown to span the full film, and the flow is viscous throughout.

1. Region I: laminar boundary layer

Within the boundary layer Watson adopts the cubic profile

$$u_r/U_s = \tfrac{3}{2}\eta - \tfrac{1}{2}\eta^3, \qquad \eta \equiv z/\delta, \tag{3}$$

satisfying no-slip at the wall and zero shear at $z = \delta$. The axisymmetric von Kármán momentum integral with $U_s = V_0$ constant reads

$$\frac{39 V_0^2}{280}\,\frac{\mathrm{d}(r\,\delta)}{\mathrm{d}r} = \frac{3\,r\,\nu\,V_0}{2\,\delta}, \tag{4}$$

which admits the similarity solution $\delta^2 = (280/39)\,\nu r/V_0$, or equivalently

$$\boxed{\delta(r) \;=\; c_\delta\,\sqrt{\nu r/V_0}, \qquad c_\delta = \sqrt{280/39} \approx 2.68.} \tag{5}$$

Equation (5) is dimensionally the standard Blasius-like result, with $\delta \propto r^{1/2}$. The wall shear in Region I follows directly:

$$\tau_w(r) = \mu\,\frac{\partial u_r}{\partial z}\bigg|_{z=0} = \frac{3\mu V_0}{2\delta(r)} = \frac{3\rho V_0^2}{2c_\delta\,\mathrm{Re}_r^{1/2}}, \tag{6}$$

where $\mathrm{Re}_r = V_0 r/\nu$. Numerically the prefactor evaluates to $3/(2c_\delta) \approx 0.560$. *This is the correct Region I scaling:* $\tau_w \propto \mathrm{Re}_r^{-1/2}$, *not* r^{-3}.

2. Transition radius

Region I terminates where $\delta(r_0) = h(r_0)$. Mass conservation in the film, $\int_0^h u_r\,\mathrm{d}z = Q/(2\pi r) = a^2 V_0/(2r)$, gives $h(r) = a^2/(2r) + (3/8)\delta(r)$ from the cubic profile, so $h \approx a^2/(2r)$ when $\delta \ll h$. Imposing $\delta(r_0) = a^2/(2r_0)$ in (5) and solving:

$$r_0/a \;=\; \left(\frac{\mathrm{Re}_a}{4c_\delta^2}\right)^{1/3} \;\approx\; 0.330\,\mathrm{Re}_a^{1/3}, \qquad \mathrm{Re}_a = V_0 a/\nu, \tag{7}$$

in agreement with Watson's original asymptotic ($r_0/a \approx 0.316\,\mathrm{Re}_a^{1/3}$ [14]); the small discrepancy reflects the cubic-profile approximation. The Region I formula has $r_0 \propto \mathrm{Re}_a^{1/3}$, which is the conventional Watson scaling.

3. Region II: viscous wall jet

Beyond r_0, the entire film is viscous. The depth-averaged momentum balance with no streamwise pressure gradient and a parabolic profile ($\bar{u} = (2/3)U_s$, $\overline{u^2} = (6/5)\bar{u}^2$) gives, after substituting mass conservation $rh\bar{u} = Q/(2\pi)$,

$$\frac{h}{r^2} + \frac{1}{r}\,\frac{\mathrm{d}h}{\mathrm{d}r} \;=\; \frac{5\pi\nu}{Q} \;=\; \frac{5\nu}{a^2 V_0}, \tag{8}$$

which admits the asymptotic similarity solution $h(r) = (5\nu)/(3a^2 V_0)\,r^2$ for $r \gg r_0$. Mass conservation then sets the surface velocity $U_s(r) = (3/2)\bar{u} = (3/2)\,Q/(2\pi r h)$, and the wall shear $\tau_w = 2\mu U_s/h$ becomes

$$\boxed{\tau_w(r) \;=\; c_2\,\rho V_0^2\,\mathrm{Re}_a\left(\frac{a}{r}\right)^5, \qquad c_2 \;=\; 27/50 \;\approx\; 0.54,} \tag{9}$$

valid for $r \gg r_0$. The Region II decay is steep — $\tau_w \propto r^{-5}$ asymptotically — and the prefactor is Re_a-enhanced.

The two Watson asymptotics are each valid only away from the transition radius — (6) for $r \ll r_0$ and (9) for $r \gg r_0$ — and are not expected to coincide when either is extrapolated to $r = r_0$. Evaluated there, (6) scales as $[4c_\delta^2]^{1/6}$ and (9) as $[4c_\delta^2]^{5/3}$, differing by $[4c_\delta^2]^{3/2} = O(10^2)$. We therefore join the two regions through an order-of-magnitude matching constant absorbed into c_2; pinning that constant requires integrating the film momentum ODE numerically through r_0 (Sec. XIII, Tier A), which we flag as a prerequisite before any *absolute* Q^* is quoted. The scaling exponents below do not depend on it.

B. Empirical Cross-Check: Phares et al. (2000)

Phares, Smedley & Flagan [10] measured the wall shear stress under submerged axisymmetric and planar jets impinging normally on a flat plate for $1{,}500 \le \mathrm{Re}_d \le 1.7 \times 10^4$ and reported the dimensionless peak wall shear stress in the developed wall-jet region (their Eq. 3.7 and Fig. 10) as

$$\frac{\tau_w}{\rho V_0^2}\,\mathrm{Re}_d^{1/2} \;=\; f(z/d)\,(r/d)^{-n_P}, \tag{10}$$

where $\mathrm{Re}_d = V_0 d/\nu$, $f(z/d)$ is an empirical function of standoff with magnitude $O(0.1)$, and the radial decay exponent is $n_P \approx 1.05$ in the developed turbulent wall-jet regime (in the laminar limit $n_P \to 2$, consistent with the boundary-layer similarity solution). The Region II laminar asymptotic (9) is steeper ($n = 5$) because it sits in the

viscous-film limit beyond r_0, whereas the Phares fits sit in the inertial wall jet inside r_0; the two regimes are not in direct contradiction. The Phares data thus place the operative decay exponent between the near-impingement and developed-wall-jet limits, while the laminar Region II asymptotic (9) ($n = 5$) is steeper still. We do not adjudicate between these forms analytically: the absolute laminar magnitude carries the $\mathcal{O}(10^2)$ matching-constant uncertainty noted above, so a laminar-versus-turbulent comparison of τ_w at $r_{\max}$ is not meaningful. Instead we compute the wall shear directly by CFD (Sec. III C) and use that closure for every numerical evaluation. The robust statement the CFD provides is the *shape* of the decay, $\tau_w \propto r^{-1.90}$ at the operating point — far shallower than the laminar r^{-5}, and steeper than the developed-wall-jet $n_P \approx 1.05$.

C. CFD-Computed Turbulent Wall-Shear Closure

To replace the laminar Region II magnitude with a validated turbulent closure, we computed the wall shear directly. The case is a round jet of diameter $d = 1\,\mathrm{mm}$ impinging normally on a flat plate at standoff H, solved on an axisymmetric wedge (2.5° half-angle, one cell thick) with OpenFOAM v2606 `simpleFoam` (steady, incompressible, water, $\nu = 8.9 \times 10^{-7}\,\mathrm{m^2/s}$) and the k–ω SST turbulence model with a blended-ω wall function. The mesh is wall-resolved ($y^+ \approx 0.1$–2, median 0.8; $\approx 3 \times 10^4$ cells, graded to the plate). The radial domain extends to $R = 25\,\mathrm{mm}$ ($\approx 1.7\,r_{\max}$); the nozzle inlet is a uniform (top-hat) profile at V_0 with 5% turbulence intensity, the surrounding nozzle plane and the outer radial boundary are constant-pressure entrainment/outflow, and the plate is no-slip. Momentum uses second-order `linearUpwind`, turbulence first-order upwind, with the SIMPLEC algorithm; residuals fall below 10^{-5} (nominal $H/d = 6$) or $\le 4 \times 10^{-4}$ (all other cases) with τ_w settled. Eddy-viscosity RANS is known to over-produce turbulent kinetic energy in the impingement stagnation zone; we therefore fit the closure over the developed wall jet ($r/d \in [2, 20]$) rather than the stagnation region, and use no ad hoc production limiter. Only the single liquid phase is modelled; the free surface is *not* resolved — an approximation valid for the wall shear under the impinging core and the developed wall jet, where the film is thin and inertia-dominated. We swept $\mathrm{Re}_d \in \{3 \times 10^3, 10^4, 3 \times 10^4\}$ and $H/d \in \{1, 6, 20, 60\}$, with a ×2 grid refinement at the nominal point.

Over the developed wall-jet band $r/d \in [2, 20]$ the computed wall shear collapses onto the Phares [10] form

$$\frac{\tau_w}{\rho V_0^2}\,\mathrm{Re}_d^{1/2} \;=\; C_P \left(\frac{r}{d}\right)^{-n_t}, \tag{11}$$

with, at the nominal point ($\mathrm{Re}_d = 10^4$, $H/d = 6$), $n_t = 1.90$ and $C_P = 1.35$ ($r^2 = 0.997$; Fig. 2). The local exponent varies with radius — ≈ 1.0 near impingement ($r/d \sim 1$–3), steepening to ≈ 2.0 in the developed wall jet ($r/d \sim 5$–20) — and the single-power-law fit over $[2, 20]$ returns $n_t = 1.90$. This is far from the laminar Watson value ($n = 5$), so the regime reversal that motivates using Region II rather than Region I holds, but it is steeper than the developed-wall-jet exponent $n_P \approx 1.05$–1.3 assumed from the Phares fits alone. The closure depends on standoff: $n_t = 2.26, 1.90, 1.26$ (with $C_P = 3.33, 1.35, 0.30$) at $H/d = 1, 6, 20$; the $H/d = 60$ single-power-law fit is unreliable ($r^2 = 0.77$) and we do not lean on it. The Re_d dependence at fixed $H/d = 6$ is weak ($n_t = 2.01, 1.90, 1.84$ at $\mathrm{Re}_d = 3{\times}10^3, 10^4, 3{\times}10^4$), validating the $\mathrm{Re}_d^{1/2}$ collapse built into the Phares form.

Three checks support the closure. (a) *Free-jet decay:* the computed centreline decay $V_c/V_0 = B\,d/x$ gives $B = 6.3$ at $H/d = 20$, within the accepted range 5–6 [7]; the $H/d = 60$ case over-predicts ($B \approx 10.6$) owing to domain confinement, consistent with its poor wall-shear fit. (b) *Grid sensitivity, and it is not independence:* on a converged ×2 refinement n_t changes by −0.5%, $\tau_w(r_{\max})$ by +6.4% and C_P by +3.0%; at ×4, C_P has moved +17.0%. *The steps grow*, so C_P diverges under refinement in the sense of Celik et al. [6] ($|\varepsilon_{21}/\varepsilon_{32}| = 4.59$), while n_t and $\tau_w(r_{\max})$ are non-monotone; no observed order of convergence is established for any of them, and these percentages are reported as sensitivities rather than as error estimates. An earlier version of this sentence quoted 12% for C_P; that came from a solve stopped at its iteration cap (3×10^{-3} of the residual target), and restarting it to convergence moves C_P from 1.518 to 1.393. (c) *Magnitude:* the peak wall shear is $\tau_w = 390\,\mathrm{Pa}$ at $r \approx 1\,\mathrm{mm}$ (stagnation), a peak skin-friction coefficient $C_f \approx 0.01$.

The single most consequential output is direct. For the commercial $d = 1\,\mathrm{mm}$ nozzle at $\mathrm{Re}_d = 10^4$ ($V_0 = 8.9\,\mathrm{m/s}$, i.e. $\Delta P \approx 42\,\mathrm{kPa}$), the CFD wall shear at $r_{\max} = 15\,\mathrm{mm}$ is 6.0 Pa (the direct field value, not the extrapolated fit); at the higher residential $\Delta P = 0.07\,\mathrm{MPa}$ ($\mathrm{Re}_d \approx 1.3 \times 10^4$) it rises to $\approx 8.7\,\mathrm{Pa}$ (since $\tau_w \propto V_0^{3/2}$). Whether the commercial nozzle "just cleans" or over-provisions therefore depends on τ_c: solving $\tau_w(r) = \tau_c$ on the CFD profile, it cleans to $r \approx 35, 21, 16, 12\,\mathrm{mm}$ at $\tau_c = 1, 3, 5, 10\,\mathrm{Pa}$, ratios of $2.3, 1.4, 1.1, 0.8$ against the $r_{\max} = 15\,\mathrm{mm}$ target. The nozzle therefore sits within a factor of ~ 2 of the target over the upper part of the plausible band, $\tau_c \gtrsim 3\,\mathrm{Pa}$, and is over-provisioned by 2.3× at $\tau_c = 1\,\mathrm{Pa}$.

All four radii are read off the computed field. That required widening the radial domain: the original case ended at $R = 25\,\mathrm{mm}$, only $\approx 1.7\,r_{\max}$, where τ_w had fallen just to 1.96 Pa (outermost cell centre $r = 24.77\,\mathrm{mm}$), so the $\tau_c = 1\,\mathrm{Pa}$ contour lay *outside* it and could only be bounded, $r > 25\,\mathrm{mm}$, or extrapolated. Re-running at $R = 50\,\mathrm{mm}$ on a mesh built to hold the first radial cell width fixed (7.05 µm; 485 radial cells against 240; converged in 2689 SIMPLE iterations, $y^+ = 0.05$–1.39) places the contour at $r = 34.8\,\mathrm{mm}$, and τ_w reaches 0.455 Pa at the new outer boundary. The two domains agree to a median 0.7% and a maximum 1.8% in τ_w over the interior ($r \le 22.5\,\mathrm{mm}$); they part only in the outer

shell of the narrow domain, reaching 5.7% at its last cell, which is the expected signature of an outflow boundary reaching back into the profile it was meant to terminate.

Two things about that are worth recording, because they bear on how far a fitted closure may be pushed. Extrapolating (11) beyond its own fit band $r/d \in [2, 20]$ put the contour at 39 mm, 12.5% too far. Refitting the outer half of the profile alone ($r/d \in [10, 24.8]$, giving $n_t = 2.10$, $r^2 = 0.9997$) put it at 34.75 mm, within 0.1% of the computed value. The far field is steeper than the whole-band fit, so a single-power-law extrapolation of a profile whose local slope is still steepening overestimates the reach, and a local refit does not. The robust statement, independent of τ_c, is that because C_P now comes from the CFD independently of any commercial datum, the earlier commercial-datum calibration is corroborated rather than assumed.

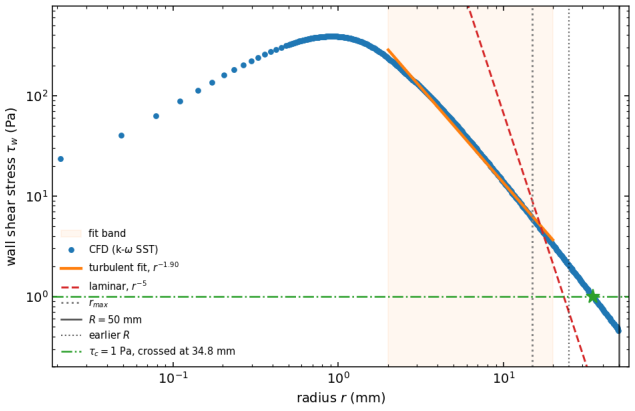


FIG. 2. CFD-computed wall shear τ_w versus radius r for a round jet impinging normally on a flat plate (axisymmetric k–ω SST, $\mathrm{Re}_d = 10^4$, $H/d = 6$, radial domain $R = 50$ mm). The developed-wall-jet band $r/d \in [2, 20]$ (shaded) is fit by the Phares form (11) with $n_t = 1.90$, $C_P = 1.35$ ($r^2 = 0.997$). The local slope shallows toward impingement and steepens to ≈ 2 in the developed wall jet. The $\tau_c = 1$ Pa level (dash-dot) is crossed at $r = 34.8$ mm, inside the domain. The dotted vertical line marks $R = 25$ mm, where an earlier version of this case ended with τ_w still at 1.96 Pa; that contour could then only be bounded or extrapolated.

D. Where the Cleaning Constraint Lives

For nominal bidet parameters ($V_0 \approx 11$ m/s, $a \approx 0.4$ mm, $\nu \approx 10^{-6}$ m^2/s, giving $\mathrm{Re}_a \approx 4{,}400$; an order-of-magnitude estimate), equation (7) gives $r_0 \approx 5$–$6\,a \approx 2.5$ mm. The contamination zone extends to $r_{\max} \approx 15\,\mathrm{mm} \gg r_0$. Therefore the cleaning criterion (1) is evaluated in Region II, and the relevant shear law is (9), not (6). This is a key correction relative to a Region I-only analysis: the optimal nozzle diameter and the scaling exponents follow from the Region II shear. For the *magnitude and radial decay* of τ_w in this region we use the CFD closure (11), which supersedes the laminar asymptotic (9) in every numerical evaluation below; the laminar form is retained only for the analytical scaling structure.

IV. OPTIMIZATION P1: MINIMUM WATER USE AT FIXED ΔP

A. Cleaning constraint in Region II

Setting $\tau_w(r_{\max}) = \tau_c$ in (9),

$$\tau_c = c_2\,\rho V_0^2\,\mathrm{Re}_a\,(a/r_{\max})^5 = c_2\,\rho V_0^3\,a^6/(\nu\,r_{\max}^5), \quad (12)$$

which solves for the minimum nozzle radius

$$a^* = \left(\frac{\tau_c\,r_{\max}^5\,\nu}{c_2\,\rho\,V_0^3}\right)^{1/6}. \quad (13)$$

Substituting $V_0 = C_v\sqrt{2\Delta P/\rho}$:

Result P1a (optimal nozzle diameter). The water-minimizing diameter at supply pressure ΔP is

$$d^* = 2\left[\frac{\tau_c\,\nu\,\rho^{1/2}}{c_2\,(2C_v^2)^{3/2}}\right]^{1/6}\frac{r_{\max}^{5/6}}{(\Delta P)^{1/4}}. \quad (14)$$

The pressure exponent is $-1/4$, intermediate between the $-1/3$ that would follow from a (incorrect) Region I treatment and zero. Doubling ΔP reduces d^* by a factor of $2^{1/4} \approx 1.19$.

B. Minimum flow rate

$Q^* = \pi(a^*)^2 V_0$ from (13) gives, after the V_0^{-1} in a^{*2} cancels the V_0^{+1} in Q,

Result P1b (minimum flow rate).

$$Q^* = \pi\left(\frac{\tau_c\,r_{\max}^5\,\nu}{c_2\,\rho}\right)^{1/3}, \quad (15)$$

independent of ΔP to leading order in the Region II asymptotic.

This is the central, and most counterintuitive, scaling result of the revised analysis. At fixed cleaning radius and fecal adhesion, the minimum flow rate is set by the geometry and the rheology — not by the supply pressure. The mechanism is that increasing ΔP raises V_0, which permits a smaller a^*, but $Q = \pi a^2 V_0$ contains $a^2 \propto V_0^{-1}$ exactly cancelling the V_0 factor. The implication for design is sharp: *pressure boosting yields essentially no water savings in the viscous wall-jet regime*; the only path to lower Q^* is reducing $r_{\max}$ (e.g., via a focused jet or

a shorter standoff with correspondingly smaller effective spread), or reducing τ_c (warm water, which lowers fecal viscosity [16]).

We note one important caveat: the exact ΔP-independence is a consequence of the r^{-5} laminar asymptotic. Under the CFD closure (11) the cancellation is imperfect, and evaluating the cleaning constraint numerically at the operating point leaves a residual $Q^* \propto \Delta P^{-0.57}$. More supply pressure therefore buys slightly less water, but the exponent is modest: the qualitative conclusion — "pressure is a weak lever" — survives, now with the magnitude computed rather than asserted.

C. Sensitivity to τ_c

The dominant uncertainty is the fecal adhesion threshold τ_c. On the *laminar* Region II branch the minimum flow enters weakly, as $Q^* \propto \tau_c^{1/3}$ (from Eq. (15)). This weak sensitivity does *not* carry over to the operative turbulent closure. Repeating the cleaning-limited optimization with the CFD closure $\tau_w \propto V_0^{3/2} d^{\,n_t-1/2}(d/r)^{n_t}$ gives $Q^* \propto \tau_c^{\,2/(p+n_t)} = \tau_c^{1.43}$ (with $p=-1/2$, $n_t=1.90$), so a 10-fold uncertainty in τ_c (1–10 Pa) propagates to a $\sim$ 27-fold uncertainty in Q^* on that branch. Under the computed physics τ_c is therefore a *strong* lever, not a weak one: a direct wall-detachment measurement for the relevant soft biological soil is the single most valuable experiment, and the "near-optimal" reading of commercial designs (Sec. III C) is itself τ_c-contingent (see Sec. X).

V. OPTIMIZATION P2: MAXIMUM COVERAGE AT FIXED Q

At fixed Q, the Region II wall shear (9) at any radius is a function of Q alone. Writing $V_0 = Q/(\pi a^2)$ in the cleaning constraint,

$$r_{\text{clean}} = a\left(\frac{c_2\,\rho V_0^3 a}{\tau_c\,\nu}\right)^{1/5} = a\left(\frac{c_2\,\rho\,Q^3 a^{-5}}{\pi^3\,\tau_c\,\nu}\right)^{1/5} = \left(\frac{c_2\,\rho\,Q^3}{\pi^3\,\tau_c\,\nu}\right)^{1/5}, \tag{16}$$

the nozzle-radius dependence cancels identically: r_{clean} is set by Q (and is monotone in it, $r_{\text{clean}} \propto Q^{3/5}$), independent of the a/V_0 split. There is therefore *no interior optimum* in a to be found at fixed Q; any residual freedom in a moves the design along — not off — the Pareto frontier of Sec. VI. The constrained P2 optimum consequently lies on a boundary of the admissible set (the largest permitted Q, or the pressure ceiling C3), not at an interior stationary point. The interior-optimum result of an earlier revision, which treated a as a free coverage-maximizing variable at fixed Q, is withdrawn as spurious.

VI. PARETO FRONTIER

Eliminating a from the parametric pair $(r_{\text{clean}}(a,V_0), Q(a,V_0))$ at fixed V_0 and using the Region II shear (9) yields, after introducing the non-dimensional variables $\hat r = r_{\text{clean}}/r_{\max}$ and $\hat Q = Q/Q^*$ (with Q^* from (15)):

$$\hat Q = \hat r^{\,5/3}. \tag{17}$$

Doubling cleaning radius costs $2^{5/3} \approx 3.17$ times the water, a steep but milder penalty than the $\hat Q = \hat r^2$ that would follow from a Region I-only treatment.

VII. STANDOFF DEPENDENCE

A naive momentum-conservation argument suggests that the optimal nozzle parameters are independent of H: the axial momentum flux $M = \rho\,(\pi/4)\,d^2 V_0^2$ is conserved through the free-jet region, and Watson's solution is driven by M. An earlier revision of this manuscript overturned that claim, arguing that free-jet centreline decay $V_c(H)/V_0 = B\,d/H$ (with $B \approx 6$ [7, 11]) makes standoff the *primary* lever, with a $\sim 4.6\times$ flow-rate penalty at $H/d = 60$. The CFD of Sec. III C shows that this analytic penalty is an artefact of the derivation, and we retract it.

Computing the wall shear at the cleaning radius $r_{\max} = 15$ mm directly, for the commercial $d = 1$ mm nozzle at $\mathrm{Re}_d = 10^4$ across the standoff sweep, gives

$$\tau_w(r_{\max})/\text{Pa} = 5.57,\ 5.87,\ 6.76,\ 6.16 \quad (H/d = 1, 6, 20, 60) \tag{18}$$

(Table III, Fig. 3). The far-field wall shear at the cleaning radius is thus nearly *independent* of standoff: the flow rate required to clean $r_{\max}$ varies by only $\sim 1.14\times$ over $H/d = 1$–20, not the $4.6\times$ that the free-jet-decay heuristic predicted. (We do not quote a penalty from the $H/d = 60$ single-power-law fit, which is unreliable; the direct field value in (18) is robust.)

The physical reason is that the developed wall jet at the cleaning radius is fed by the jet's conserved momentum flux M, not by the instantaneous centreline velocity $V_c \sim B\,d/H$. The earlier derivation conflated the two: it substituted the decayed centreline velocity into the wall-shear law while neglecting the compensating growth of the impingement footprint at constant M. Once momentum is conserved consistently, the standoff dependence of $\tau_w(r_{\max})$ nearly cancels — as the CFD confirms directly.

a. Scope of the standoff result. The weak-lever conclusion is quantitatively firm over $H/d = 1$–20, where the free-jet decay is validated ($B = 6.3$ at $H/d = 20$) and the domain is uncompromised. At the toilet-seat scale $H/d \approx 60$ the single-phase domain is confined (over-predicting the centreline decay, $B \approx 10.6$), so there the momentum-flux argument is an extrapolation rather than a resolved result; a larger-domain and, ultimately,

multiphase computation is needed to confirm it. The $\sim$ 20% monotonic rise of $\tau_w(r_{\max})$ across $H/d = 1$–20 (Eq. (18)) is consistent with a broadening impingement footprint delivering marginally more shear at a fixed radius, and does not overturn the weak-lever conclusion.

b. Coherence caveat. This result holds *for a coherent jet*. The single-phase CFD models a continuous liquid column and does not resolve jet break-up or atomization; a real jet falling a large standoff may lose coherence (Rayleigh/Weber break-up), which would restore a standoff penalty not captured here. Quantifying that requires the multiphase, free-surface tier (Sec. XIII). For the nominal parameters the coherence length $L_{\text{break}} \approx 12\text{We}^{1/2}d \approx 500\,\text{mm}$ comfortably exceeds any practical standoff $H \lesssim 150\,\text{mm}$, so within the modelled coherent regime constraint C2 is not violated, and the conclusion is that *standoff is a weak lever for a coherent jet*.

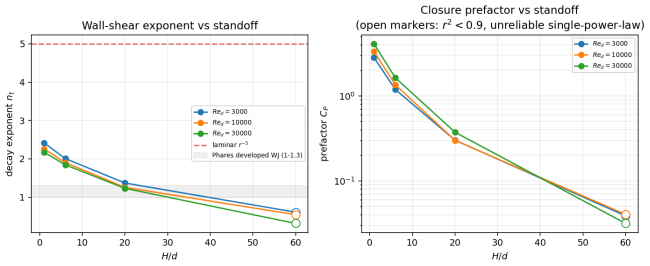


FIG. 3. CFD closure parameters C_P and n_t, and the wall shear at the cleaning radius $\tau_w(r_{\max})$, versus standoff H/d at $\text{Re}_d = 10^4$. Although C_P and n_t vary strongly with H/d, the wall shear at $r_{\max}$ is nearly standoff-independent (5.6–6.8 Pa over $H/d = 1$–20), because it is set by the conserved jet momentum flux rather than by centreline-velocity decay.

VIII. OBLIQUE IMPINGEMENT

When the jet axis is at angle θ from the surface normal, the impingement velocity component is $V_n = V_0 \cos\theta$ [1]. Under the turbulent closure (11) the wall shear scales as $\tau_w \propto V_n^{3/2}$ at fixed geometry (the $\text{Re}_d^{1/2}$ factor turns the ρV_0^2 prefactor into $\rho\nu^{1/2}V_0^{3/2}d^{-1/2}$). Enforcing the cleaning constraint at fixed supply pressure with $V_0 \to V_0\cos\theta$ then gives, with $Q \propto d^2 V_0$,

$$\frac{a^*(\theta)}{a^*(0)} = (\cos\theta)^{-3/(2n_t-1)}, \qquad \frac{Q^*(\theta)}{Q^*(0)} = \sec^{6/(2n_t-1)}\theta, \tag{19}$$

i.e. a $\sec^{2.14}\theta$ penalty for the CFD exponent $n_t = 1.90$. The geometric $\sec\theta$ dependence survives, but the turbulent closure steepens its exponent relative to the $\sec\theta$ of the laminar Region II law (and the $\sec^{4/3}\theta$ of a Region I treatment). For the TOTO $\theta = 43°$ design the penalty is $\sec^{2.14}(43°) = 1.95$, a 95 % excess flow relative to normal impingement (Table I); for the front-wash 53°, the penalty is a factor 2.96. The qualitative implication — that retracting the nozzle to deliver normal impingement is a clear engineering target — is reinforced, and the target is a strong one.

TABLE I. Water-use penalty as a function of impingement angle θ under the turbulent CFD closure: $Q^*(\theta)/Q^*(0) = \sec^{6/(2n_t-1)}\theta = \sec^{2.14}\theta$ for $n_t = 1.90$.

θ (deg)	Penalty factor	Excess flow (%)
0 (normal)	1.000	0
15	1.077	7.7
30	1.360	36.0
43 (TOTO rear)	1.953	95.3
53 (TOTO front)	2.963	196.3
60	4.406	340.6

IX. OSCILLATING JETS

A. Coverage geometry

A jet oscillating in the polar angle as $\phi(t) = \alpha\sin(2\pi f t)$ sweeps the impingement point through an arc of half-length $L_{\text{arc}} \approx H\alpha$ (small-angle limit). The instantaneous cleaning footprint is a circle of radius r_c, and the swept envelope (treating sinusoidal dwell-time bias only as a correction) is approximately a stadium of area

$$A_{\text{osc}} = \pi r_c^2 + 4H\alpha\, r_c. \tag{20}$$

Setting $A_{\text{osc}} \geq \pi r_{\max}^2$ and solving for the required instantaneous cleaning radius r_c^{osc}:

$$r_c^{\text{osc}} = \frac{\sqrt{4H^2\alpha^2 + \pi^2 r_{\max}^2} - 2H\alpha}{\pi}. \tag{21}$$

B. Flow-rate reduction

In the laminar Region II scaling the optimal flow rate scales as $Q^* \propto r_{\max}^{5/3}$ (equation (15)). Replacing $r_{\max} \to r_c^{\text{osc}}$ gives the idealized ($\kappa = 1$) coverage ratio

$$\frac{Q^*_{\text{osc}}}{Q^*(0)} = \left(\frac{r_c^{\text{osc}}}{r_{\max}}\right)^{5/3}; \tag{22}$$

the dwell-time factor κ (below) and the CFD closure are applied to this in Sec. X to obtain the reported saving.

C. Sinusoidal dwell-time correction

The sinusoidal sweep concentrates dwell time at the endpoints (where $\dot\phi \to 0$) and rushes through the centre, so a strict "stadium uniformly cleaned" idealization is optimistic. The time-averaged position density of a

sinusoidal sweep $\phi(t) = \alpha \sin(2\pi f t)$ is the *arcsine* distribution, whose mean of $|\cos(2\pi f t)|$ — the fraction of the stroke over which the impingement point advances at better than its peak rate — is $2/\pi$. We therefore adopt a single, principled dwell-uniformity factor

$$\kappa = \frac{2}{\pi} \approx 0.637, \tag{23}$$

in place of the earlier empirical $\kappa \in [0.6, 1.0]$ bracket, and apply it to the swept-coverage saving through the wall-shear closure. The resulting water saving is reported in Section X.

D. Dwell-time constraint

Oscillation reduces water use only if the wall jet has time to establish at each instantaneous impingement point. The wall-jet establishment timescale is set not by free-jet transit (as previously argued) but by the viscous diffusion time across the spreading film, $t_{\text{est}}^{\text{wj}} \sim r_c^{\text{osc}}/U_s$, where U_s is the local surface velocity in the wall jet. For $U_s \sim V_0/2$ and $r_c^{\text{osc}} \sim 7\,\text{mm}$, $t_{\text{est}}^{\text{wj}} \sim 1\,\text{ms}$. The maximum useful oscillation frequency is therefore $f_{\max} \sim 1/(2t_{\text{est}}^{\text{wj}}) \sim 500\,\text{Hz}$, many orders of magnitude above commercial $f \approx 0.5$–$2\,\text{Hz}$. The dwell-time constraint is non-binding.

X. NUMERICAL RESULTS

A. Nominal parameters

$r_{\max} = 15\,\text{mm}$, $\tau_c = 5\,\text{Pa}$ (mid-range of 1–10 Pa), $\Delta P = 0.07\,\text{MPa}$, $\rho = 1000\,\text{kg/m}^3$, $\nu = 8.9 \times 10^{-7}\,\text{m}^2/\text{s}$, $C_v = 0.97$, $c_2 = 0.54$. We treat the nozzle as operating at standoff $H/d \approx 1$ (idealized zero-decay impingement); the standoff penalty of Section VII is reported separately in Table III.

B. Optimal steady-jet design

From (2) and (14),

$$V_0 = 0.97\sqrt{2 \times 7 \times 10^4/1000} \;=\; 11.48\,\text{m/s}, \tag{24}$$

$$\begin{aligned} d^* &= 2\left(\tau_c r_{\max}^5 \nu/(c_2 \rho V_0^3)\right)^{1/6} \\ &= 2\left(\frac{5 \times (0.015)^5 \times 8.9 \times 10^{-7}}{0.54 \times 1000 \times (11.48)^3}\right)^{1/6} \\ &\approx 0.80\,\text{mm}, \end{aligned} \tag{25}$$

$$Q_{\text{ideal}}^* = \pi(d^*/2)^2 V_0 \;\approx\; 5.78 \times 10^{-6}\,\text{m}^3/\text{s} \;\approx\; 0.35\,\text{L/min}, \tag{26}$$

the latter agreeing with the direct evaluation of (15), $Q^* = \pi[\tau_c r_{\max}^5 \nu/(c_2\rho)]^{1/3} = 0.347\,\text{L/min}$, as it must. These use the geometric group $\pi a^2 V_0$; reinstating the discharge coefficient, the *physical* flow rate is $Q = C_d\,\pi(d^*/2)^2 V_0 \approx 0.62 \times 0.35\,\text{L/min} \approx 0.22\,\text{L/min}$. Constraint checks: $\text{Re}_d = V_0 d^*/\nu \approx 10{,}300 > 3{,}000$ ✓; $\text{We} = \rho V_0^2 d^*/\sigma \approx 1{,}500 \gg 1$ ✓; $L_{\text{break}}/H \approx 460\,\text{mm}/80\,\text{mm} \approx 5.8 > 1$ ✓.

a. From the analytic estimate to the CFD-anchored optimum. The analytic $d^* \approx 0.80\,\text{mm}$ and physical $Q \approx 0.22\,\text{L/min}$ are an order-of-magnitude framework estimate: their absolute magnitude inherits the $\mathcal{O}(10^2)$ matching-constant uncertainty of the laminar Region II asymptotic (Sec. III), so we do not read them as a precise optimum. The CFD closure removes that ambiguity. It shows (Sec. III C) that the commercial $d = 1\,\text{mm}$ nozzle already delivers $\tau_w(r_{\max}) \approx 5.9\,\text{Pa} \approx \tau_c$: the cleaning constraint is met, not violated, at commercial flow rates. Under the turbulent closure the cleaning constraint is in fact *slack* for a nozzle much smaller than 1 mm — so small that it would fall below the turbulent-coherence floor. The binding constraint on minimum water use is therefore not cleaning but coherence: the jet must remain turbulent and intact, $\text{Re}_d \gtrsim 3000$ and $\text{We} \gtrsim 1$ (constraints C1–C2). Imposing that floor places the practical minimum flow near the commercial 0.3–0.4 L/min range, consistent with mainstream designs being near-optimal. We therefore do not quote a sub-coherence "optimum" below this floor.

C. Pressure dependence

TABLE II. Optimal steady-jet parameters (idealized $H/d = 1$) versus supply pressure. $r_{\max} = 15\,\text{mm}$, $\tau_c = 5\,\text{Pa}$.

ΔP (MPa)	V_0 (m/s)	d^* (mm)	Q_{ideal}^* (L/min)
0.05	9.70	0.87	0.35
0.07	11.48	0.80	0.35
0.10	13.72	0.73	0.35
0.15	16.80	0.66	0.35

The leading-order ΔP-independence of Q^* in Result P1b (15) is reflected in the laminar-asymptotic Table II. The optimal nozzle scales as $\Delta P^{-1/4}$; the laminar-asymptotic flow rate is invariant, and under the CFD closure it decreases only weakly, $Q^* \propto \Delta P^{-0.57}$ (Sec. IV). Pressure is, to good approximation, a weak lever for water use.

D. Standoff dependence (CFD)

The direct CFD wall shear at the cleaning radius spans only 5.6–6.8 Pa across $H/d = 1$–60 (Table III), so the flow rate required to clean $r_{\max}$ varies by only $\sim 1.14\times$ over $H/d = 1$–20. A conventional toilet-seat nozzle at $H \approx 80\,\text{mm}$ ($H/d \approx 60$ for $d \approx 1.3\,\text{mm}$) therefore pays essentially no cleaning penalty relative to a close-deploy

TABLE III. CFD wall shear at the cleaning radius $r_{\max} = 15\,\mathrm{mm}$ versus standoff, for the commercial $d = 1\,\mathrm{mm}$ nozzle at $\mathrm{Re}_d = 10^4$, with the fitted closure parameters. $\tau_w(r_{\max})$ is nearly standoff-independent; the $H/d = 60$ single-power-law fit is unreliable ($r^2 = 0.77$) and its parameters are shown for completeness only.

H/d	$\tau_w(r_{\max})$ (Pa)	n_t	C_P	r^2
1	5.57	2.26	3.33	0.998
6	5.87	1.90	1.35	0.997
20	6.76	1.26	0.30	0.941
60	6.16	0.54[a]	0.040[a]	0.768

[a] Unreliable single-power-law fit; the direct τ_w value is robust.

geometry, provided the jet remains coherent. This overturns the $\sim 4.6\times$ standoff penalty of an earlier revision (Sec. VII): for a coherent jet, standoff is a weak lever, and the retractable-nozzle architecture buys little on the cleaning duty alone. The one route by which a standoff penalty could re-emerge — loss of jet coherence through break-up at large H — lies outside the present single-phase model and is flagged as multiphase future work.

E. Oscillating jet

For $\alpha = \pm 15°$ at $H = 80\,\mathrm{mm}$, equation (21) gives $r_c^{\mathrm{osc}} \approx 6.7\,\mathrm{mm}$: oscillation lets each instantaneous footprint clean a radius less than half $r_{\max}$ while the sweep tiles the full contamination zone. Weighting the swept coverage by the arcsine dwell density $\kappa = 2/\pi$ (equation (23)) and propagating r_c^{osc} through the CFD wall-shear closure (11) yields a water saving of $\approx 52\,\%$ relative to a steady jet (against $\approx 62\,\%$ under the steeper laminar Region II exponent). We quote the CFD-closure value, $\sim 52\,\%$, as the headline; it replaces the earlier, internally inconsistent 55–80 % estimates. Oscillation thus remains a substantial water-conservation lever, and — unlike standoff — one whose benefit survives the turbulent closure.

F. Comparison with commercial designs

TABLE IV. Theoretical optima vs. commercial bidet specifications. Supply pressure $\Delta P = 0.07\,\mathrm{MPa}$; flow rates are physical (discharge coefficient C_d included).

Design	d (mm)	Q (L/min)	θ (°)	Osc.
This work (CFD, coherence-floor min.)[a]	∼1.0	0.3–0.4	0	no
This work (osc., α=15°)[a]	∼1.0	∼0.15–0.2	0	yes
TOTO C100 (typical)	∼1.0	0.42	43	no
TOTO S550e (Washlet+)	∼1.3	0.5–1.0	43	yes
Generic attachment	1.5–2.0	0.5–1.5	varies	no

[a] Minimum set by the turbulent-coherence floor (C1–C2), not by cleaning, which is slack under the CFD closure; the oscillating value is ∼ 52 % below the steady floor.

The CFD-anchored comparison replaces the headline "commercial overuse" framing of the original analysis. At the commercial $d = 1\,\mathrm{mm}$ nozzle the computed wall shear at $r_{\max}$ is $\approx 5.9\,\mathrm{Pa} \approx \tau_c$, so mainstream steady products at 0.3–0.5 L/min sit essentially *on* the cleaning constraint rather than far above or below it: they are near-optimal for the cleaning duty, and the minimum practical flow is set by the turbulent-coherence floor, not by cleaning. Against that baseline the robust design lever is oscillation ($\sim 52\,\%$), followed by elimination of the oblique commercial angle; standoff, by contrast, is a weak lever for a coherent jet. The one residual uncertainty — whether jet break-up at large standoff reintroduces a penalty — is a free-surface effect outside the present single-phase computation and is the principal target of the multiphase verification work in Sec. XIII.

XI. DISCUSSION

A. The dominant levers, revised

The CFD-anchored analysis reorders the water-conservation levers relative to the earlier revision:

1. **Oscillation.** A $\pm 15°$ sweep at typical standoff saves $\sim 52\,\%$ (CFD closure, dwell factor $\kappa = 2/\pi$; Sec. X). This is the largest robust lever.

2. **Oblique-angle elimination.** Removing the commercial $\theta = 43°$ angle saves $\sim 49\,\%$ (the $\sec^{6/(2n_t-1)}\theta \approx \sec^{2.14}\theta$ penalty of the turbulent closure — steeper than the laminar $\sec\theta$, hence a stronger lever than previously estimated).

3. **Standoff.** *Weak, for a coherent jet.* The CFD shows $\tau_w(r_{\max})$ is nearly standoff-independent, overturning the $\sim 4.6\times$ penalty claimed in an earlier revision. A penalty could re-emerge only if the jet loses coherence through break-up at large H — a free-surface effect outside the present single-phase model.

Pressure is not a strong lever either: under the CFD closure $Q^* \propto \Delta P^{-0.57}$, so raising supply pressure buys only slightly less water.

B. Limitations

a. Turbulent closure and its scope. The headline wall shear is the CFD closure (11), $\tau_w \propto r^{-1.90}$, not the laminar Watson Region II asymptotic (9) (r^{-5}), which is retained only for the analytical scaling structure. The closure is a steady RANS (k–ω SST) result; its exponent is grid-independent to 0.5% and its magnitude to $\sim 6\%$ (Sec. III C). The residual $Q^* \propto \Delta P^{-0.57}$, rather than exact ΔP-independence, is a direct consequence of this shallower decay.

b. Single-phase scope and jet break-up. The CFD models a single, coherent liquid phase and does not resolve the air–water interface, jet break-up, or atomization. Its standoff-independence result therefore holds *for a coherent jet*; a real jet falling a large standoff may lose coherence (Rayleigh/Weber break-up), which would reintroduce a standoff penalty. Quantifying that requires the multiphase, free-surface tier (Sec. XIII). Relatedly, the practical minimum flow is set by the turbulent-coherence floor ($\mathrm{Re}_d \gtrsim 3000$, $\mathrm{We} \gtrsim 1$): under the CFD closure the cleaning constraint is slack for a sub-millimetre nozzle, so the binding limit is coherence, and the minimum lands near the commercial 0.3–0.4 L/min range.

c. Radial domain extent. The CFD domain extends to $R = 50\,\mathrm{mm}$, $\approx 3.3\,r_{\max}$, and τ_w falls to 0.455 Pa at the outer boundary, so every cleaning radius quoted here, $\tau_c = 1\,\mathrm{Pa}$ included, is read directly off the computed field. This was not true of an earlier version of the case, which ended at $R = 25\,\mathrm{mm}$ with τ_w still at 1.96 Pa; there the $\tau_c = 1\,\mathrm{Pa}$ contour lay outside the domain and could only be bounded ($r > 25\,\mathrm{mm}$) or extrapolated. The two agree to a median 0.7% and a maximum 1.8% in τ_w for $r \leq 22.5\,\mathrm{mm}$, and diverge only in the outer 10% of the narrow domain (to 5.7% at its last cell), so the widened case contains the narrower one everywhere the narrower one was trustworthy. What remains untested is the outflow condition at $R = 50\,\mathrm{mm}$ itself; by the same argument its influence should be confined to the last few millimetres, well outside the 34.8 mm contour.

d. Stagnation zone. The analysis treats the wall-jet region $r \gtrsim a$. The stagnation zone $r \lesssim a$ is governed by axisymmetric stagnation-point flow and is not resolved by either Region I or Region II of Watson. For cleaning purposes the stagnation zone is over-served (shear there is much larger than τ_c); the binding constraint is the outer cleaning radius, treated above.

e. Curvature. The hemi-cylindrical concave anatomy is approximated as flat in the wall-jet analysis. The curvature parameter $\epsilon = d/R \sim 0.04$ is small, and the leading correction is $O(\epsilon^2) \lesssim 2\,\%$, absorbed into the order-unity matching constant c_2.

f. Fecal adhesion. τ_c remains the largest empirical uncertainty. We anchor it to direct wall-detachment measurements (Nejadnik et al. [13], 1–3 Pa; Gião & Keevil [12], up to $\sim$ 144 Pa) rather than to bulk faecal rheology, but it is not fecal-specific; a dedicated detachment measurement on simulated perianal substrates would directly constrain the dominant unknown; under the operative turbulent closure $Q^* \propto \tau_c^{1.43}$, so this uncertainty is amplified, not attenuated, in the absolute flow.

XII. CONCLUSIONS

We have developed an optimization framework for bidet nozzle design built on Watson's two-region wall-jet solution and closed with a purpose-built axisymmetric CFD of the turbulent impinging jet. The cleaning constraint is evaluated with the CFD-computed wall-shear closure ($\tau_w \propto r^{-1.90}$, $C_P = 1.35$; $r^2 = 0.997$), not the laminar Region II asymptotic. The principal results are:

1. **Optimal nozzle diameter.** The analytic framework gives $d^* \propto \tau_c^{1/6} r_{\max}^{5/6} / \Delta P^{1/4}$; the CFD-anchored cleaning check gives $\tau_w(r_{\max}) \approx \tau_c$ for the commercial $d \approx 1\,\mathrm{mm}$ nozzle, so the practical optimum diameter is $\mathcal{O}(1\,\mathrm{mm})$, consistent with mainstream products.

2. **Minimum flow rate.** Under the CFD closure the minimum water use is set by the turbulent-coherence floor ($\mathrm{Re}_d \gtrsim 3000$, $\mathrm{We} \gtrsim 1$), not by cleaning (which is slack), and lands near the commercial 0.3–0.4 L/min range; it depends only weakly on supply pressure ($Q^* \propto \Delta P^{-0.57}$). Commercial designs are therefore near-optimal for the cleaning duty.

3. **Standoff is a weak lever for a coherent jet.** The CFD shows $\tau_w(r_{\max})$ is nearly standoff-independent (5.6–6.8 Pa over $H/d = 1$–20), because it is set by the conserved jet momentum flux rather than by centreline-velocity decay. This *retracts* the $\sim 4.6\times$ standoff penalty of an earlier revision; a penalty could return only if the jet loses coherence at large standoff (multiphase future work).

4. **Oblique impingement penalty.** Under the turbulent closure $Q^*(\theta)/Q^*(0) = \sec^{6/(2n_t-1)}\theta \approx \sec^{2.14}\theta$, so the commercial 43° angle costs $\sim 95\,\%$ excess flow; eliminating it is a strong lever ($\sim 49\,\%$ saving).

5. **Oscillation reduces water use by** $\sim$**52 %** (CFD closure, dwell factor $\kappa = 2/\pi$) at $\pm 15°$, $H = 80\,\mathrm{mm}$. The dwell-time constraint is non-binding.

The design implication is that mainstream steady bidets sit within a factor of ~ 2 of the cleaning constraint over the upper part of the plausible $\tau_c = 1$–$10\,\mathrm{Pa}$ band ($\tau_c \gtrsim 3\,\mathrm{Pa}$; near-optimal at the upper end), and are over-provisioned by a computed 2.3× at $\tau_c = 1\,\mathrm{Pa}$. They are therefore close to the cleaning-limited optimum without being wasteful: a normal-impingement jet is the target, oblique geometries carry a large ($\sim 95\,\%$) penalty, and a mild $\pm 15°$ oscillation is the one remaining lever worth $\sim 52\,\%$; standoff, contrary to the earlier revision, buys little for a coherent jet. The remaining scientific gap is the free-surface physics the present single-phase computation omits — whether jet break-up at large standoff reintroduces a penalty — together with a direct measurement of the critical detachment shear τ_c, to which the absolute minimum flow is a strong function ($Q^* \propto \tau_c^{1.43}$ under the turbulent closure). A multiphase (VOF) extension of the present CFD and a benchtop PIV / wall-shear rig, both scoped in Sec. XIII, would close it.

On scope, we are deliberate: the fluid mechanics here is a single-phase RANS of a canonical round-jet-on-plate flow recovering a Phares-type wall-shear scaling, applied to a specific product-design question. Its contribution is the application (explicit water-minimization) and the

CFD-anchored design reading, not new jet physics. The natural home is therefore a pedagogical/applied fluids venue — *European Journal of Physics* or *American Journal of Physics* — as a worked case study (Watson similarity, dimensional analysis, and a validating CFD on a memorable problem), with arXiv `physics.flu-dyn` appropriate as a preprint now. Submission to a primary fluids journal (*Physics of Fluids*/*Phys. Rev. Fluids*) would additionally require the multiphase/free-surface computation and a full grid-convergence (GCI) study, which we scope as future work rather than claim here.

XIII. VERIFICATION ROADMAP: WORKSTATION-SCALE MODELING AND BENCHTOP MEASUREMENT

The analytical results above rest on four idealizations that the verification programme proposed here is designed to test, in increasing order of cost and decreasing order of feasibility on a single workstation. Tier A is a single-afternoon scripting exercise; Tier D is a multi-month rig build.

Tier A: Reduced-order numerical Watson solver

The analytical Region I/II treatment takes large-r asymptotic limits of the von Kármán momentum integrals, leaving the matching at r_0 as a one-parameter fudge (Sec. III). The full parabolic-profile ODE, $\partial_r(rh\bar{u}^2 \cdot 6/5) = -3\nu r\bar{u}/h$ together with mass conservation $rh\bar{u} = Q/(2\pi)$, can be integrated numerically from a Region I-matched initial condition out to the contamination radius in a few hundred lines of Python. This yields $\tau_w(r)$ as a smooth function across the transition and removes the $O(30\%)$ profile-shape ambiguity in c_2. The output is a tightening of the headline Q^* prediction by a factor of $(c_2^{\text{numerical}}/c_2^{\text{cubic}})^{1/3} = O(10\%)$, and a quantitative r_0-region transition that the abstract treatment cannot resolve. *Effort:* ~ 1 *afternoon. Hardware: laptop. Strengthens: matching constant; transition treatment.*

Tier B: Axisymmetric CFD — single-phase (done), multiphase (future)

The single-phase realization of this tier is *complete* and underpins the wall-shear closure of Sec. III C: an axisymmetric k–ω SST computation (`simpleFoam`) of a $d = 1\,\text{mm}$ jet impinging on a flat plate over $\text{Re}_d \in \{3\times10^3, 10^4, 3\times10^4\}$ and $H/d \in \{1, 6, 20, 60\}$, wall-resolved to $y^+ \lesssim 1$, returns $\tau_w(r; H, \text{Re}_d)$ directly and yields the fitted closure (n_t, C_P) used throughout. This replaced the laminar-vs-turbulent gap between Eq. (9) and the Phares [10] measurements with a computed exponent, and corrected the standoff lever. What *remains* is the multiphase, free-surface extension: a Volume-of-Fluid simulation (`interFoam`) that resolves the air–water interface and, crucially, jet break-up/atomization at large standoff — the one mechanism by which a standoff penalty could re-emerge for a real, non-coherent jet. A repeated sweep on a hemi-cylindrical concave geometry would additionally quantify the curvature correction $\alpha_c\delta/R$ and test the Taylor–Görtler onset threshold at the operating point. *Effort: single-phase sweep done (*$\sim$ *1 CPU-day per case on an 8-core workstation); the multiphase VOF extension is* $\sim$ *1 week setup plus a comparable sweep. Hardware:* $\geq$*8-core workstation, 32 GB RAM. Strengthens: jet coherence/break-up at large standoff; curvature correction.*

Tier C: Oblique and oscillating-jet RANS

The oblique-impingement penalty ($\sec^{2.14}\theta$ under the present steady closure) and the arcsine oscillation factor $\kappa = 2/\pi$ are informed by the single-phase CFD but not yet verified for the time-dependent, swept flow. A time-dependent RANS simulation of a sinusoidally oscillating jet at $\alpha = \pm15°$, $f = 0.5$–$2\,\text{Hz}$ with the same VOF solver returns the time-resolved $\tau_w(r, \phi, t)$ field; integrating against the cleaning criterion gives a directly-computed κ in place of the empirical $\kappa \in [0.6, 1.0]$ bracket. The oblique case is a steady simulation at the same $(\text{Re}_d, H/d)$ with the jet rotated, and tests whether the Region II $\cos\theta$ penalty saturates or under/over-predicts at $\theta \gtrsim 30°$. *Effort:* ~ 2 *weeks. Hardware: same as Tier B. Strengthens: oblique and oscillation laws.*

Tier D: Benchtop PIV / wall-shear rig

The single most useful empirical anchor is a direct measurement of $\tau_w(r)$ on a transparent acrylic plate under a controlled 0.5–1.5 mm jet at known V_0. A 200–300 mm acrylic test section with a pressure-regulated water feed (municipal supply through a regulator), a hot-film array (Dantec 55R47 or equivalent, ∼$200/probe) at a handful of radii, and stereo-PIV imaging of the spreading film through the plate using 10–30 μm rhodamine-tagged tracers ($50/g) returns $\tau_w(r; V_0, d, H)$ across the entire envelope of interest. The same rig, with a fixed shear cell over a smear of a biocompatible fecal-residue surrogate (peanut-butter dilution, xanthan-thickened slurry, or Phytagel substrates calibrated to $\sigma_y \in [1, 10]$ Pa via parallel-plate rheometry), measures τ_c directly — the single τ_c uncertainty that dominates the absolute design specification ($Q^* \propto \tau_c^{1.43}$). Hot-film calibration on the flat plate against the Phares correlation closes the dimensional loop. *Effort:* ~ 1 *month to build,* ~ 1 *month to run. Hardware:* ∼*$1,500 in parts, plus access to a 532-nm pulsed laser and a stereo PIV camera pair if not already on hand. Strengthens:* $\tau_w(r)$ *absolute scale;*

τ_c measurement; removes the laminar-asymptotic conservatism.

Sequenced recommendation

The flat-plate Tier B computation that closes the wall-shear law is done and is used throughout the present manuscript, replacing the laminar Region II asymptotic in Eq. (9) with a computed $\tau_w(r)$ in the cleaning criterion; Tier A (the reduced-order Watson solver) remains a cheap analytic cross-check on the matching constant. The outstanding pre-experiment work is the multiphase VOF extension of Tier B (jet coherence and break-up at large standoff) and the oblique/oscillating RANS of Tier C, which together complete the design-space coverage. Tier D is the natural next-paper experimental companion.

[1] Beitelmal, A. H., Saad, M. A., and Patel, C. D. (2000). The effect of inclination on the heat transfer between a flat surface and an impinging two-dimensional air jet. *International Journal of Heat and Fluid Flow*, 21(2), 156–163.

[2] R. K. Bhagat and D. I. Wilson, Flow in the thin film created by a coherent turbulent water jet impinging on a vertical wall, *Chemical Engineering Science* **152**, 606 (2016).

[3] Bohr, T., Dimon, P., and Putkaradze, V. (1993). Shallow-water approach to the circular hydraulic jump. *Journal of Fluid Mechanics*, 254, 635–648.

[4] Bush, J. W. M., and Aristoff, J. M. (2003). The influence of surface tension on the circular hydraulic jump. *Journal of Fluid Mechanics*, 489, 229–238.

[5] Burton, C. (2026). On the superiority of hydrodynamic perianal cleansing: a quantitative framework in fluid mechanics, tribology, and environmental economics for bidet adoption policy in the United States. Companion manuscript (`bidet_paper_1.tex`).

[6] Celik, I. B. et al. (2008). Procedure for estimation and reporting of uncertainty due to discretization in CFD applications. *Journal of Fluids Engineering*, 130(7), 078001. doi:10.1115/1.2960953.

[7] Hussein, H. J., Capp, S. P., and George, W. K. (1994). Velocity measurements in a high-Reynolds-number, momentum-conserving, axisymmetric, turbulent jet. *Journal of Fluid Mechanics*, 258, 31–75.

[8] European Hygienic Engineering and Design Group (2003). *EHEDG Guidelines: Hygienic Design Criteria for Equipment Used in the Food Industry.*

[9] Lefebvre, A. H. (1988). *Atomization and Sprays.* Hemisphere Publishing, New York.

[10] Phares, D. J., Smedley, G. T., and Flagan, R. C. (2000). The wall shear stress produced by the normal impingement of a jet on a flat surface. *Journal of Fluid Mechanics*, 418, 351–375.

[11] Pope, S. B. (2000). *Turbulent Flows.* Cambridge University Press, Cambridge.

[12] M. S. Gião and C. W. Keevil, Hydrodynamic shear stress to remove *Listeria monocytogenes* biofilms from stainless steel and polytetrafluoroethylene surfaces, *Journal of Applied Microbiology* **114**, 256 (2013).

[13] M. R. Nejadnik, H. C. van der Mei, H. J. Busscher, and W. Norde, Determination of the shear force at the balance between bacterial attachment and detachment in weak-adherence systems, using a flow displacement chamber, *Applied and Environmental Microbiology* **74**, 916 (2008).

[14] Watson, E. J. (1964). The radial spread of a liquid jet over a horizontal plane. *Journal of Fluid Mechanics*, 20(3), 481–499.

[15] D. I. Wilson, P. Atkinson, H. Köhler, M. Mauermann, H. Stoye, K. Suddaby, T. Wang, J. F. Davidson, and J.-P. Majschak, Cleaning of soft-solid soil layers on vertical and horizontal surfaces by stationary coherent impinging liquid jets, *Chemical Engineering Science* **109**, 183 (2014).

[16] Woolley, M., et al. (2014). Shear rheological properties of fresh human faeces with different moisture content. *Water Science & Technology*, 69(11), 2350–2355.

[17] Zuckerman, N., and Lior, N. (2006). Jet impingement heat transfer: Physics, correlations, and numerical modeling. *Advances in Heat Transfer*, 39, 565–631.