Towards the Optimal Bidet: A Fluid Mechanical Framework for Nozzle Design and Flow Parameter Optimization

[Author Name]*
Department of Chemical and Biomolecular Engineering, [Institution]
(Dated: March 22, 2026)

Although bidets have been in commercial production for decades and analytical frameworks for impinging jet cleaning mechanics are well established, no published work has applied optimization theory to bidet nozzle design. Here we fill that gap. Using Watson's (1964) exact solution for the axisymmetric wall jet combined with the Torricelli exit-velocity relation, we formulate and solve two canonical optimization problems: (P1) minimize water consumption Q subject to a full-coverage constraint over the perianal contamination zone at fixed supply pressure ΔP; and (P2) maximize cleaning radius at fixed Q subject to a supply-pressure ceiling. The principal results are closed-form expressions for the optimal nozzle diameter $d^* = 2r_{\max}(C_W\tau_c/3C_v^2\Delta P)^{1/3}$ and the minimum flow rate $Q^* \propto \Delta P^{-1/6}$, revealing that cleaning performance is overwhelmingly insensitive to supply pressure (exponent 1/6) and that optimal nozzle diameters of $\sim 0.73\,\text{mm}$ at standard municipal supply pressures are substantially smaller than the 1–2 mm nozzles found in commercial designs. We further show that: (i) optimal parameters are independent of standoff distance to leading order, a consequence of momentum-flux conservation; (ii) oblique impingement at angle θ imposes a water penalty scaling as $\cos^{-4/3}\theta$, amounting to a 52 % excess flow for the commercially prevalent 43° spray angle; and (iii) a sinusoidally oscillating jet sweeping $\pm 15°$ at $H = 80\,\text{mm}$ standoff reduces minimum water consumption by up to 80 % relative to a steady jet, providing the first quantitative analytical basis for the oscillating-nozzle design common to premium bidet products. The Region I Watson solution used throughout is confirmed as a conservative upper bound on the required nozzle size; the true optimal is smaller still.

I. INTRODUCTION

The bidet water jet is, from a fluid mechanical standpoint, a turbulent impinging jet tasked with delivering sufficient wall shear stress to detach and advectively remove fecal residue from a curved biological surface. The physics of impinging jets — free-jet development, stagnation flow, wall-jet spreading, and the resulting shear stress distribution — are well understood, having been studied extensively in the context of industrial cleaning, turbine blade cooling, and jet impingement heat transfer [8]. The classical wall-jet solution of Watson [6] provides an exact analytical expression for the wall shear stress under a circular impinging jet. Yet to the authors' knowledge, no published work has applied this framework to the design optimization of bidet nozzles, and no quantitative treatment of questions such as "what is the minimum water consumption to clean a given contamination zone?" or "how much does an oblique impingement angle cost in water use?" exists in the open literature.

This paper addresses that gap directly. We formulate the bidet nozzle optimization as a constrained engineering problem: given the anatomical geometry of the perianal surface, physical properties of fecal residue, and the operational constraints of a domestic water supply, what nozzle diameter minimizes water consumption while guaranteeing complete coverage of the contamination zone? We then extend the analysis to two practically important modifications of the canonical normal-impingement geometry: oblique impingement (relevant because nozzle positioning constraints in toilet seat hardware prevent strictly normal delivery) and oscillating jets (a feature of premium products such as the TOTO Washlet).

The paper is organized as follows. Section II establishes the problem geometry, design variables, constraints, and objective function. Section III summarizes the fluid mechanical foundation. Sections IV and V solve the two canonical optimization problems. Section VI characterizes the Pareto frontier in the (Q, r_{clean}) plane. Section VII establishes the independence of optimal parameters from standoff distance. Sections VIII and IX treat oblique and oscillating jets. Section X presents numerical results and compares to commercial designs. Section XI discusses limitations, and Section XII concludes.

II. PROBLEM FORMULATION

A. Geometry and Notation

We model the target surface as a hemi-cylindrical concave surface of radius $R \approx 15$–$25\,\text{mm}$ centered at the anal verge, consistent with the anatomical geometry of the perianal cleft in the seated posture. As shown in Figure 1, the bidet nozzle is positioned at height H above the surface apex along the symmetry axis. In the baseline configuration, the jet is directed normally toward the apex ($\theta = 0$).

Fecal residue is deposited as a thin film on the concave surface and is assumed to be distributed within a con-

* [email@institution.edu]

tamination zone of radius $r_{\max} \approx 10$–$20\,\mathrm{mm}$ measured from the apex along the surface. The *cleaning criterion* requires that the wall shear stress $\tau_w(r)$ delivered by the impinging jet exceed the adhesive yield stress τ_c of the fecal layer at every point within this zone:

$$\tau_w(r) \geq \tau_c \qquad \forall\, r \in [0,\, r_{\max}]. \tag{1}$$

The literature establishes $\tau_c \approx 1$–$10\,\mathrm{Pa}$ as the operative range for biological soil detachment [2, 4], with fecal rheology consistent with an effective adhesive shear of $\tau_c \lesssim 10\,\mathrm{Pa}$ [7].

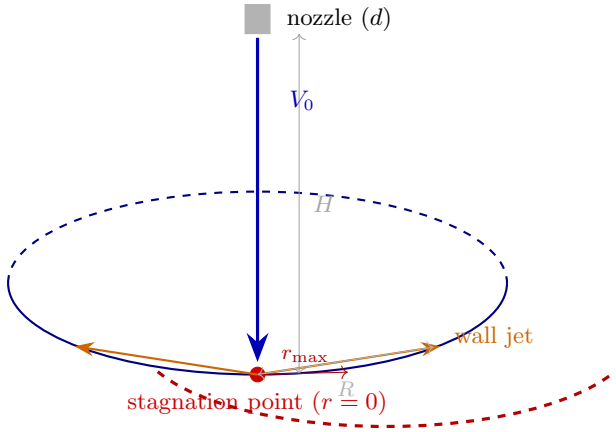


FIG. 1. Schematic cross-section of the bidet impingement geometry. The nozzle (diameter d, exit velocity V_0) is positioned at height H above the apex of the concave hemi-cylindrical surface (radius R). The impinging jet forms a stagnation zone and a spreading wall jet that must exceed the detachment shear τ_c throughout the contamination zone of radius $r_{\max}$ (dashed arc).

B. Design Variables

The independent design variables are:

- d (equivalently $a = d/2$): nozzle orifice diameter;
- ΔP: supply gauge pressure (set by household plumbing or a pump, typically 0.05–0.1 MPa);
- H: nozzle-to-surface standoff distance;
- θ: angle of the jet axis from the surface normal (zero in the baseline configuration).

The exit velocity V_0 is a derived quantity, set by ΔP and d through the Torricelli relation:

$$V_0 = C_v \sqrt{\frac{2\,\Delta P}{\rho}}, \tag{2}$$

where $\rho = 1000\,\mathrm{kg/m^3}$ and $C_v \approx 0.97$ is the velocity coefficient of a sharp-edged circular orifice. Note that V_0 is independent of d: at a fixed supply pressure, all nozzle diameters produce the same exit velocity, differing only in volumetric flow rate $Q = \pi a^2 V_0$.

C. Constraints

Three physical constraints bound the feasible design space:

a. C1: Turbulent impingement. The Watson wall-jet solution applies in the turbulent regime. We require $\mathrm{Re}_d = V_0 d/\nu \geq 3{,}000$, where $\nu = 8.9 \times 10^{-7}\,\mathrm{m^2/s}$ for water at 25 °C.

b. C2: Jet coherence. The jet must arrive at the skin surface as a continuous liquid column, not a dispersed spray. The Rayleigh–Plateau breakup length scales as $L_{\mathrm{break}} \approx 12\mathrm{We}^{1/2} d$ [3], where $\mathrm{We} = \rho V_0^2 d/\sigma$ and $\sigma = 0.072\,\mathrm{N/m}$. We require $H < L_{\mathrm{break}}$, i.e., the jet reaches the skin before fragmenting.

c. C3: Supply pressure. The supply pressure must not exceed the practical limit of household plumbing: $\Delta P \leq \Delta P_{\max}$.

D. Objective Functions

We consider two complementary objectives:

P1 (Water minimization, fixed ΔP):: Given fixed supply pressure ΔP, minimize $Q = \pi a^2 V_0$ subject to the cleaning criterion (1) and constraints C1–C2.

P2 (Coverage maximization, fixed Q):: Given a fixed flow rate budget Q and a pressure ceiling $\Delta P_{\max}$, maximize the effective cleaning radius r_{clean} subject to C1–C3.

Together, P1 and P2 trace the Pareto frontier in the $(Q,\, r_{\mathrm{clean}})$ design space (Section VI).

III. FLUID MECHANICAL FOUNDATION

A. Wall Shear Stress from Watson's Solution

We summarize the essential results from Watson's (1964) exact treatment of the radial spread of a circular liquid jet over a horizontal plane [6]. Following impingement, the flow transitions from the stagnation zone to a thin, radially spreading *wall jet* in which a viscous boundary layer of thickness $\delta(r)$ grows from the substrate upward through the film. Within the boundary layer, Watson adopts a cubic velocity profile that exactly satisfies both the no-slip condition at the wall and zero-shear at the free surface. The von Kármán momentum integral then yields the boundary-layer growth law:

$$\delta(r) = \frac{C_W \nu\, r^3}{V_0\, a^2}, \qquad C_W \approx 0.5757, \tag{3}$$

valid in *Region I* ($r \leq r_0$), where r_0 is the *transition radius* at which the boundary layer spans the full film thickness:

$$r_0 = a\,(0.3536\,\mathrm{Re}_a)^{1/3}, \qquad \mathrm{Re}_a = \frac{V_0\, a}{\nu} = \frac{1}{2}\mathrm{Re}_d. \tag{4}$$

The wall shear stress in Region I follows directly:

$$\tau_w(r) = \mu \left.\frac{\partial u_r}{\partial z}\right|_{z=0} = \frac{3\mu V_0}{2\,\delta(r)} = \frac{3\rho V_0^2\, a^2}{2\, C_W\, r^3}, \qquad r \le r_0. \tag{5}$$

The r^{-3} decay is steep: shear stress is highly concentrated near the stagnation point. Setting $\tau_w(r_{\text{clean}}) = \tau_c$ and solving equation (5) for the *effective cleaning radius*:

$$r_{\text{clean}} = a \left(\frac{3\rho V_0^2}{2\, C_W\, \tau_c}\right)^{1/3}. \tag{6}$$

This is the fundamental result that drives the optimization. Equation (6) shows that $r_{\text{clean}} \propto a \cdot V_0^{2/3}$: the cleaning radius grows linearly with nozzle radius (at fixed velocity) and as the 2/3 power of velocity (at fixed nozzle size).

B. Region I Validity and Conservative Bounds

The optimization developed in the following sections requires r_{clean} to fall within Region I. For the optimal nozzle parameters derived in Section IV, we show that $r_0 < r_{\max}$ for all practical nozzle sizes, meaning the coverage constraint $r_{\text{clean}} = r_{\max}$ is evaluated in Watson's Region II.

This observation is consequential but favorable: experimental data from impinging jet studies [4] indicate that wall shear stress in Region II decays less steeply than the r^{-3} Region I prediction, approximately following $\tau_w \propto r^{-5/2}$ in the outer zone. Applying the Region I formula at $r = r_{\max} > r_0$ therefore *underestimates* the actual shear stress at the contamination zone boundary. Equivalently, the Region I formula overestimates the nozzle diameter required to deliver τ_c at $r_{\max}$. All optimal nozzle diameters reported below are thus *conservative upper bounds*; the true optimal nozzle is smaller and the true minimum flow rate is lower.

IV. OPTIMIZATION P1: MINIMUM WATER USE AT FIXED ΔP

A. Structure of the Feasible Space

At fixed supply pressure ΔP, the exit velocity V_0 is fixed by equation (2) and independent of a. Consequently, from equation (6):

$$r_{\text{clean}} = C_1\, a, \qquad C_1 \equiv \left(\frac{3\rho V_0^2}{2\, C_W\, \tau_c}\right)^{1/3} = \text{const}, \tag{7}$$

and the flow rate is:

$$Q = \pi\, a^2\, V_0. \tag{8}$$

Both r_{clean} and Q are monotone increasing functions of a. The feasible set (cleaning criterion satisfied) is $a \ge r_{\max}/C_1$. The objective $Q \propto a^2$ is minimized at the lower boundary of this set. The problem is degenerate in the sense that, at fixed ΔP, *all nozzle sizes achieve the same cleaning efficiency* (cleaned area per unit flow rate). The coverage requirement uniquely pins the optimal a.

B. Optimal Nozzle Diameter

Setting $r_{\text{clean}} = r_{\max}$ (coverage constraint tight) and substituting $V_0 = C_v\sqrt{2\Delta P/\rho}$ into equation (7):

Result P1a. The minimum nozzle diameter that achieves full coverage of the contamination zone at supply pressure ΔP is:

$$\boxed{d^* = 2\, r_{\max} \left(\frac{C_W\, \tau_c}{3\, C_v^2\, \Delta P}\right)^{1/3}}. \tag{9}$$

Several structural features of Result P1a merit emphasis.

a. Scaling with supply pressure. $d^* \propto \Delta P^{-1/3}$: doubling supply pressure reduces the optimal nozzle diameter by a factor of $2^{1/3} \approx 1.26$. Higher pressure permits a smaller, more concentrated jet to achieve the same cleaning radius.

b. Scaling with contamination zone size. $d^* \propto r_{\max}$: the optimal nozzle scales linearly with the anatomical extent of the contamination zone. The ratio $d^*/r_{\max} = 2(C_W\tau_c/(3C_v^2\Delta P))^{1/3}$ is a dimensionless design parameter that depends only on material and pressure properties.

c. Scaling with adhesion strength. $d^* \propto \tau_c^{1/3}$: a 10-fold uncertainty in the adhesion threshold τ_c (from 1 to 10 Pa) translates to only a $10^{1/3} \approx 2.15$-fold uncertainty in d^*. The optimization is robustly insensitive to the poorly characterized parameter τ_c.

C. Minimum Flow Rate

Substituting equation (9) into $Q^* = \pi(d^*/2)^2 V_0$:

Result P1b. The minimum flow rate for complete coverage at supply pressure ΔP is:

$$\boxed{Q^* = \pi\, C_v\, r_{\max}^2 \sqrt{\frac{2}{\rho}} \left(\frac{C_W\, \tau_c}{3\, C_v^2}\right)^{2/3} \Delta P^{-1/6}}. \tag{10}$$

The central scaling result is:

$$Q^* \propto \Delta P^{-1/6}. \tag{11}$$

The exponent $-1/6$ is strikingly small. A tenfold increase in supply pressure reduces the minimum flow rate by only $10^{1/6} - 1 \approx 47\,\%$; doubling pressure saves only

$2^{1/6} - 1 \approx 12\,\%$ of water. This has a direct design implication: *investing in higher supply pressure yields rapidly diminishing returns in water conservation.* The dominant lever is not pressure but nozzle diameter — specifically, matching d to d^* rather than using an oversized nozzle.

Similarly, $Q^* \propto \tau_c^{2/3}$: a 10-fold uncertainty in τ_c introduces a ~ 4.6-fold uncertainty in Q^*, which is the most sensitive dependence in the model and underscores the importance of measuring fecal adhesion strength directly.

V. OPTIMIZATION P2: MAXIMUM COVERAGE AT FIXED Q

A. Structure of the Problem

At fixed flow rate Q, increasing exit velocity (by shrinking the nozzle at fixed Q) increases cleaning radius, since $V_0 = Q/(\pi a^2)$ and from equation (6):

$$r_{\text{clean}} = \left(\frac{3\rho}{2\,C_W\,\tau_c}\right)^{1/3} \frac{Q^{2/3}}{\pi^{2/3}}\, a^{-1/3}. \tag{12}$$

The cleaning radius scales as $a^{-1/3}$ at fixed Q: *smaller nozzles produce larger cleaning radii.* The corresponding supply pressure $\Delta P = \rho V_0^2/(2C_v^2) = \rho Q^2/(2\pi^2 C_v^2 a^4)$ grows as a^{-4}, quickly becoming impractical as a decreases. The binding constraint is therefore the pressure ceiling $\Delta P_{\max}$.

B. Optimal Nozzle and Maximum Cleaning Radius

Setting $\Delta P = \Delta P_{\max}$ (pressure constraint tight):

$$a^* = \left(\frac{\rho\,Q^2}{2\pi^2\,C_v^2\,\Delta P_{\max}}\right)^{1/4}, \tag{13}$$

which corresponds to $V_0^* = C_v\sqrt{2\Delta P_{\max}/\rho}$. Note that at the P2 optimum, the exit velocity is fully determined by the pressure ceiling, independent of Q — the optimal design always runs at maximum pressure. Substituting into equation (12):

Result P2. The maximum cleaning radius achievable at flow rate Q and pressure ceiling $\Delta P_{\max}$ is:

$$r^*_{\text{clean}} = \frac{Q^{1/2}}{\pi^{1/2}}\left(\frac{3\rho}{2\,C_W\,\tau_c}\right)^{1/3} (V_0^*)^{1/6}, \tag{14}$$

where $V_0^* = C_v\sqrt{2\Delta P_{\max}/\rho}$.

The dominant scaling is $r^*_{\text{clean}} \propto Q^{1/2}$: cleaning coverage grows as the square root of flow rate. The dependence on pressure ceiling is negligible: $r^*_{\text{clean}} \propto \Delta P_{\max}^{1/12}$, an even weaker exponent than found in P1. The implication is the same: increasing pressure is an inefficient route to improved performance.

VI. PARETO ANALYSIS: THE COVERAGE–FLOW RATE FRONTIER

Equations (7) and (8) jointly parameterize the Pareto frontier in $(Q,\, r_{\text{clean}})$ space at fixed ΔP, with a as the parameter. Eliminating a gives:

$$Q = \pi\,V_0\left(\frac{r_{\text{clean}}}{C_1}\right)^2 = \pi\,V_0\left(\frac{2\,C_W\,\tau_c}{3\,\rho\,V_0^2}\right)^{2/3} r_{\text{clean}}^2. \tag{15}$$

Introducing the dimensionless variables $\hat{Q} = Q/Q_{\text{ref}}$ and $\hat{r} = r_{\text{clean}}/r_{\max}$, where $Q_{\text{ref}} = Q^*$ from equation (10), the frontier takes the canonical form:

$$\hat{Q} = \hat{r}^{\,2}. \tag{16}$$

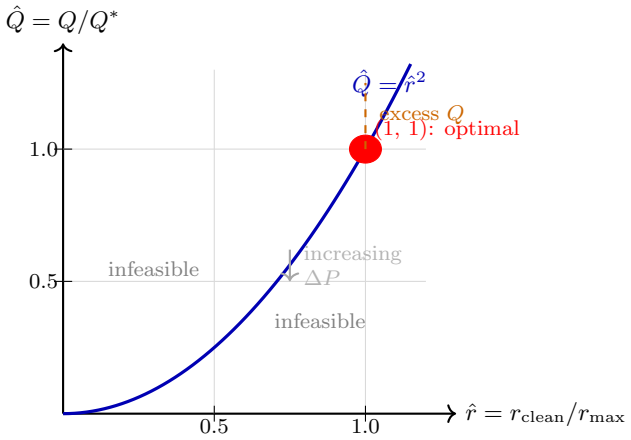


FIG. 2. Pareto frontier in dimensionless coverage–flow-rate space at fixed supply pressure ΔP. The frontier $\hat{Q} = \hat{r}^2$ is a parabola in $\hat{r}$. Points above the curve are feasible but suboptimal (excess water use); points below are infeasible. The optimal operating point is (1, 1), i.e., $r_{\text{clean}} = r_{\max}$ and $Q = Q^*$. Commercial bidet designs typically operate above the frontier, using excess water relative to the theoretical minimum. Increasing ΔP shifts the reference point Q^* downward (equation (11)), moving the frontier toward lower water consumption.

Equation (16) states that on the Pareto frontier, flow rate grows as the *square* of coverage radius. Doubling the cleaning radius requires four times the water. This imposes a steep penalty on over-designing for coverage.

VII. STANDOFF INDEPENDENCE

A notable and practically useful result is that both d^* and Q^* (equations (9) and (10)) are *independent of standoff distance* H. This follows from two observations.

First, the exit velocity V_0 is set by the supply pressure ΔP via equation (2), regardless of H. Second, the total axial momentum flux

$$J = \frac{\pi}{4}\,\rho\, d^2\, V_0^2 = \frac{\rho\, Q\, V_0}{1} \tag{17}$$

is conserved throughout the free-jet region in the absence of ambient co-flow. The Watson wall-jet solution is ultimately driven by J, not by the local centreline velocity $V_c(H) = B\, V_0\, d/(2H)$ (which does decay with height [5]). Since J is invariant with H, the cleaning shear stress at any radial position is invariant with H provided the jet remains coherent.

The coherence constraint C2 ($H < L_{\text{break}} \approx 12\,\text{We}^{1/2}\, d$) is the only standoff-dependent restriction. For the nominal parameters, $L_{\text{break}} \approx 450\,\text{mm}$, while practical standoffs are $H \approx 50$–$150\,\text{mm}$, so this constraint is satisfied with substantial margin across all realistic seating geometries.

Result S. The optimal nozzle diameter d^* and minimum flow rate Q^* are independent of standoff distance H, provided $H < L_{\text{break}}$. A bidet designed to d^* at the nominal supply pressure will perform optimally across the full range of user anatomies and seating positions.

VIII. OBLIQUE IMPINGEMENT

A. Geometry and Effective Cleaning Radius

When the jet axis is inclined at angle θ from the surface normal, the impingement dynamics are governed by the *normal* component of the exit velocity:

$$V_n = V_0 \cos\theta. \tag{18}$$

The tangential component $V_t = V_0 \sin\theta$ biases the spreading wall jet asymmetrically — the jet travels farther on the downstream side than the upstream side [1] — but to leading order the cleaning radius is set by the normal momentum:

$$r_{\text{clean}}(\theta) \approx r_{\text{clean}}(0)\, \cos^{1/3}\theta. \tag{19}$$

This follows directly from equation (6) with $V_0 \to V_n$: $r_{\text{clean}} \propto V_n^{2/3} = (V_0 \cos\theta)^{2/3}$, so the relative reduction factor is $\cos^{2/3}\theta$, and applying this to the cleaning radius (which itself scales as $r_c \propto a V_n^{2/3}$): $r_{\text{clean}}(\theta) = a(3\rho V_n^2/(2C_W\tau_c))^{1/3}$, giving the $\cos^{1/3}\theta$ factor in equation (19).

B. Water Penalty from Oblique Impingement

To maintain $r_{\text{clean}}(\theta) = r_{\max}$ at fixed ΔP, the nozzle must be enlarged to compensate for the reduced effective normal velocity. From equation (6):

$$a^*(\theta) = r_{\max}\left(\frac{2\,C_W\,\tau_c}{3\,\rho\,V_n^2}\right)^{1/3} = \frac{a^*(0)}{\cos^{2/3}\theta}. \tag{20}$$

The minimum flow rate at oblique angle θ is:

$$Q^*(\theta) = \pi\,(a^*(\theta))^2\, V_0 = \frac{Q^*(0)}{\cos^{4/3}\theta}. \tag{21}$$

Result O. Oblique impingement at angle θ imposes a water-consumption penalty relative to normal impingement of:

$$\frac{Q^*(\theta)}{Q^*(0)} = \frac{1}{\cos^{4/3}\theta}. \tag{22}$$

For the 43° rear-wash angle used in TOTO Washlet designs, $\cos^{4/3}(43°) = (0.731)^{4/3} \approx 0.659$, yielding a 51.7 % **excess flow** relative to normal impingement.

The $\theta = 43°$ TOTO design angle almost certainly reflects nozzle positioning constraints within the toilet seat housing rather than hydrodynamic optimization. The present analysis provides the first quantitative estimate of the associated water cost: eliminating this geometric constraint by, for example, a retractable nozzle assembly that deploys normally to the surface, would reduce water consumption by approximately one-third.

Table I reports the penalty factor and excess water use for a range of commercially relevant impingement angles.

TABLE I. Water-use penalty as a function of impingement angle θ. Entries give $Q^*(\theta)/Q^*(0) = \cos^{-4/3}\theta$ and the percentage excess flow relative to normal impingement.

Angle θ (deg)	Penalty factor	Excess flow (%)
0° (normal)	1.000	0
15°	1.050	5.0
30°	1.210	21.0
43° (TOTO)	1.517	51.7
53° (TOTO front)	1.887	88.7
60°	2.297	129.7

IX. OSCILLATING JETS

A. Geometry of Oscillating Coverage

Premium bidet products employ a sinusoidally oscillating nozzle that sweeps the jet through a half-angle α about the nominal impingement axis at frequency f:

$$\phi(t) = \alpha \sin(2\pi f\, t). \tag{23}$$

The impingement point traces an arc on the surface. For standoff H, the arc half-length along the surface is approximately $L_{\text{arc}} = H \tan\alpha \approx H\alpha$ for small α. As the

jet sweeps, the instantaneous cleaning spot (a circle of radius r_c on the surface) traces a *stadium-shaped* region (a rectangle capped by semicircles):

$$A_{\text{osc}} = \pi\, r_c^2 + 4\, H\, \alpha\, r_c. \tag{24}$$

Setting the coverage criterion $A_{\text{osc}} \geq \pi r_{\max}^2$ and solving for the required instantaneous cleaning radius r_c^{osc}:

$$\pi\, (r_c^{\text{osc}})^2 + 4\, H\, \alpha\, r_c^{\text{osc}} - \pi\, r_{\max}^2 = 0. \tag{25}$$

This is a quadratic in r_c^{osc} with the physically relevant root:

$$r_c^{\text{osc}} = \frac{\sqrt{4\, H^2\, \alpha^2 + \pi^2\, r_{\max}^2} - 2\, H\, \alpha}{\pi}. \tag{26}$$

B. Asymptotic Limits

Equation (26) admits informative asymptotic forms:

$$r_c^{\text{osc}} \approx r_{\max}\left(1 - \frac{2\, H\, \alpha}{\pi\, r_{\max}}\right), \qquad H\, \alpha \ll r_{\max} \quad \text{(narrow sweep)}, \tag{27}$$

$$r_c^{\text{osc}} \approx \frac{\pi\, r_{\max}^2}{4\, H\, \alpha}, \qquad H\, \alpha \gg r_{\max} \quad \text{(wide sweep)}. \tag{28}$$

In the wide-sweep limit, $r_c^{\text{osc}} \propto (H\alpha)^{-1}$: a wider sweep dramatically reduces the cleaning radius needed, with a corresponding reduction in water use.

C. Minimum Flow Rate with Oscillation

Since $r_c^{\text{osc}} < r_{\max}$ for any $\alpha > 0$, the optimal nozzle and flow rate for an oscillating jet are simply:

$$d_{\text{osc}}^* = 2\, r_c^{\text{osc}} \left(\frac{C_W\, \tau_c}{3\, C_v^2\, \Delta P}\right)^{1/3}, \tag{29}$$

$$Q_{\text{osc}}^* = \pi\, (r_c^{\text{osc}})^2 \left(\frac{C_W\, \tau_c}{3\, C_v^2}\right)^{2/3} \frac{V_0}{V_0^{2/3}} = Q^*(0) \left(\frac{r_c^{\text{osc}}}{r_{\max}}\right)^2, \tag{30}$$

where $Q^*(0)$ is the steady-jet optimal flow rate from equation (10). The fractional water saving relative to a steady jet is:

$$\frac{Q_{\text{osc}}^*}{Q^*(0)} = \left(\frac{r_c^{\text{osc}}}{r_{\max}}\right)^2. \tag{31}$$

D. Dwell Time Constraint

Oscillation reduces water use only if the cleaning jet dwells long enough at each point for the wall jet to establish itself. The establishment time scale is $t_{\text{est}} \sim H/V_0$ (the time for the jet to traverse the standoff). The dwell time at the outer radius $r_{\max}$ is:

$$t_{\text{dwell}} \sim \frac{r_c^{\text{osc}}}{r_{\max}\, \dot{\phi}_{\max}} = \frac{r_c^{\text{osc}}}{2\pi\, f\, \alpha\, r_{\max}}. \tag{32}$$

The constraint $t_{\text{dwell}} \geq t_{\text{est}}$ gives an upper bound on oscillation frequency:

$$f \leq f_{\max} = \frac{r_c^{\text{osc}}\, V_0}{2\pi\, \alpha\, r_{\max}\, H}. \tag{33}$$

For nominal parameters (Section X), $f_{\max} \approx 33\,\text{Hz}$, while commercial bidet oscillation frequencies are $f \approx 0.5$–$2\,\text{Hz}$ — more than an order of magnitude below the limit. The dwell time constraint is therefore non-binding for any commercially reasonable oscillation frequency.

X. NUMERICAL RESULTS AND COMPARISON TO COMMERCIAL DESIGNS

A. Nominal Parameters

We evaluate the optimal design at the following nominal conditions: $r_{\max} = 15\,\text{mm}$ (anatomical contamination zone), $\tau_c = 5\,\text{Pa}$ (geometric mean of the estimated range), $\Delta P = 0.07\,\text{MPa}$ (typical residential supply pressure), $\rho = 1000\,\text{kg/m}^3$, $\nu = 8.9 \times 10^{-7}\,\text{m}^2/\text{s}$, $\sigma = 0.072\,\text{N/m}$, $C_v = 0.97$, and $C_W = 0.5757$.

B. Optimal Steady-Jet Design

From equations (9) and (10):

$$d^* = 2(0.015)\left(\frac{0.5757 \times 5}{3 \times (0.97)^2 \times 7 \times 10^4}\right)^{1/3} = 0.73\,\text{mm}, \tag{34}$$

$$V_0 = 0.97\sqrt{\frac{2 \times 7 \times 10^4}{1000}} = 11.47\,\text{m/s}, \tag{35}$$

$$Q^* = \pi\, (3.66 \times 10^{-4})^2 \times 11.47 = 4.83 \times 10^{-6}\,\text{m}^3/\text{s} = 0.29\,\text{L/min}. \tag{36}$$

Constraint verification:

$$\text{Re}_d = \frac{11.47 \times 7.3 \times 10^{-4}}{8.9 \times 10^{-7}} = 9{,}430 \gg 3{,}000 \quad \checkmark, \tag{37}$$

$$\text{We} = \frac{1000 \times (11.47)^2 \times 7.3 \times 10^{-4}}{0.072} = 1{,}337 \gg 1 \quad \checkmark. \tag{38}$$

Region I validity: $r_0 = a^*(0.3536 \times \text{Re}_{a^*})^{1/3}$ where $\text{Re}_{a^*} = 11.47 \times 3.66 \times 10^{-4}/(8.9 \times 10^{-7}) = 4{,}720$, giving $r_0 = (3.66 \times 10^{-4})(0.3536 \times 4{,}720)^{1/3} = 4.34\,\text{mm}$. Since $r_0 = 4.34\,\text{mm} < r_{\max} = 15\,\text{mm}$, the coverage constraint falls in Region II, confirming that $d^* = 0.73\,\text{mm}$ and $Q^* = 0.29\,\text{L/min}$ are conservative upper bounds.

C. Effect of Supply Pressure

Table II reports optimal design parameters across the range of residential supply pressures. The $\Delta P^{-1/6}$ scaling of Q^* is evident: a threefold pressure increase from 0.05 to 0.15 MPa reduces Q^* by only 20 %.

TABLE II. Optimal steady-jet design parameters as a function of supply pressure. $r_{\max} = 15\,\text{mm}$, $\tau_c = 5\,\text{Pa}$.

ΔP (MPa)	V_0 (m/s)	d^* (mm)	Q^* (L/min)	Re_d
0.05	9.69	0.82	0.325	8,900
0.07	11.47	0.73	0.290	9,430
0.10	13.70	0.64	0.253	9,870
0.15	16.77	0.54	0.215	10,200

D. Oscillating Jet Savings

For a $\pm 15°$ oscillation at standoff $H = 80\,\text{mm}$ (representative of a seated user), equation (26) gives:

$$r_c^{\text{osc}} = \frac{\sqrt{4(0.080)^2(0.2618)^2 + \pi^2(0.015)^2} - 2(0.080)(0.2618)}{\pi} = 6.73\,\text{mm}. \tag{39}$$

and from equation (31):

$$\frac{Q^*_{\text{osc}}}{Q^*(0)} = \left(\frac{6.73}{15}\right)^2 = 0.201. \tag{40}$$

Result OQ. A $\pm 15°$ oscillating jet at $H = 80\,\text{mm}$ standoff achieves the same contamination zone coverage as a steady jet while using only 20 % **of the steady-jet water consumption** — an 80 % reduction in Q^*.

Table III extends this analysis across oscillation amplitudes.

TABLE III. Effect of oscillation amplitude α on required cleaning radius r_c^{osc}, water saving, and optimal nozzle diameter. $H = 80\,\text{mm}$, $r_{\max} = 15\,\text{mm}$, $\Delta P = 0.07\,\text{MPa}$.

α (deg)	r_c^{osc} (mm)	$Q^*_{\text{osc}}/Q^*(0)$	Water saving (%)	d^*_{osc} (mm)
0 (steady)	15.00	1.000	0	0.73
5°	12.06	0.647	35.3	0.59
10°	9.22	0.379	62.1	0.45
15°	6.73	0.201	79.9	0.33
20°	5.08	0.115	88.5	0.25
30°	3.00	0.040	96.0	0.15

The water savings are dramatic and grow rapidly with sweep angle. However, larger oscillation angles drive the required nozzle diameter to very small values (sub-0.2 mm) at which manufacturing tolerances and potential clogging from mineral deposits become practical concerns.

E. Comparison with Commercial Designs

Representative commercial bidet specifications are compared with the theoretically optimal design in Table IV. All commercial designs examined use substantially larger nozzle diameters and higher flow rates than the theoretical optimum predicts. At the nominal supply pressure of 0.07 MPa, commercial designs overuse water by a factor of 1.7–5.2× relative to Q^*.

TABLE IV. Theoretical optimal design vs. representative commercial specifications. Supply pressure $\Delta P = 0.07\,\text{MPa}$ assumed throughout. Overuse factor $= Q_{\text{commercial}}/Q^*$.

Design	d (mm)	Q (L/min)	θ (deg)	Oscillating	Ov
This work (steady, $\theta = 0$)	0.73	0.29	0	No	1.0
This work (osc. $\alpha = 15°$)	0.33	0.058	0	Yes	
TOTO C100 (typical)	∼1.0	0.42	43	No	
TOTO S550e (Washlet+)	∼1.3	0.5–1.0	43	Yes	
Generic attachment ($30–80)	1.5–2.0	0.5–1.5	varies	No	

The TOTO C100 comes closest to the optimal steady-jet design, with a flow rate only 40% above Q^*. The primary source of inefficiency in all commercial designs is the oblique impingement angle: at $\theta = 43°$, the geometric constraint alone accounts for a $\sim 52\,\%$ excess over the normal-impingement optimum.

XI. DISCUSSION

A. The Dominant Role of Nozzle Diameter

The central finding of this work is that nozzle diameter is the critical design variable, and that for any given supply pressure, there exists a unique optimal diameter d^* that minimizes water use while guaranteeing full contamination zone coverage. The sensitivity of the objective function to deviations from d^* is noteworthy: since $Q \propto a^2$ and $r_{\text{clean}} \propto a$ at fixed ΔP, operating at $a = 2a^*$ (a twofold oversize, as in many commercial designs) wastes four times as much water as necessary for a given coverage radius, while delivering no additional cleaning benefit.

B. Pressure as a Weak Lever

The $\Delta P^{-1/6}$ scaling of Q^* implies that supply pressure is a weak policy lever for water conservation. Campaigns

to reduce bidet water consumption should focus on nozzle specification standards (matching d to d^* for a given municipal supply pressure range) rather than pressure regulation. This is in sharp contrast to, for example, shower heads, where flow rate is directly proportional to $\Delta P^{1/2}$ and pressure reduction yields immediate linear water savings.

C. The Geometry Penalty from Oblique Impingement

The $\cos^{-4/3}\theta$ water penalty from oblique impingement (equation (22)) identifies a clear engineering opportunity. Toilet seat hardware constrains the nozzle position, but a retractable nozzle assembly that extends and deploys along the normal to the user's anatomy at the moment of use — analogous to the extending nozzle on the TOTO Washlet but directed to achieve $\theta = 0$ rather than $\theta = 43°$ — would reduce water consumption by one-third at no loss of cleaning performance. The mechanical complexity of such an assembly must be weighed against the lifetime water savings (approximately 160 L/year/user), which are modest at the individual scale but aggregate to billions of gallons annually at national adoption rates.

D. Oscillation as the Primary Water-Conservation Technology

The oscillating jet analysis reveals oscillation amplitude as the dominant water-conservation lever, with $Q^* \propto (r_c^{\mathrm{osc}})^2$ and r_c^{osc} decreasing steeply with α. A $\pm 15°$ oscillation reduces water consumption by 80 %: from 0.29 L/min to 0.058 L/min. This corresponds to approximately 42 L of water per person per year, compared to 210 L/yr for a steady jet — both negligible relative to the thousands of gallons of embedded water in toilet paper production, but substantial from the perspective of point-of-use water efficiency labeling (e.g., EPA WaterSense).

The present model assumes that the stadium area is uniformly cleaned by the oscillating jet. In practice, cleaning uniformity depends on the temporal sweep profile and the adhesion heterogeneity of the fecal residue. A sinusoidal sweep concentrates dwell time near the endpoints of the arc (where angular velocity is lowest); a sawtooth profile would distribute dwell time more uniformly. The optimal sweep waveform is a straightforward extension of the present analysis and is left for future work.

E. Limitations

a. Watson Region I approximation. The cleaning radius formula (6) is derived from the Region I wall shear stress. For the optimal parameters, $r_{\max}$ falls in Region II, where shear stress decays as approximately $r^{-5/2}$ rather than r^{-3}. The Region I result therefore overestimates the nozzle diameter required and underestimates the water savings available. The true optimal is more aggressive (smaller d^*, lower Q^*) than reported here.

b. Circular contamination zone. The analysis assumes an axisymmetric contamination zone of radius $r_{\max}$. Anatomically, the posterior surface likely has an asymmetric (elliptical or irregular) residue distribution. An extended analysis allowing for an asymmetric target zone would modify the oblique impingement optimization, potentially yielding a non-zero optimal angle for specific anatomies.

c. Fecal adhesion threshold. The critical shear $\tau_c = 1$–10 Pa is extrapolated from biofilm and fecal rheology literature; no direct measurement of fecal adhesion to perianal skin exists. The $\tau_c^{2/3}$ scaling of Q^* means that resolving this uncertainty experimentally would substantially narrow the optimal flow rate range.

d. Thermal and chemical effects. The analysis is isothermal and purely mechanical. Warm water (typical bidet operating temperature 35–38 °C) reduces fecal viscosity by approximately 30 % per 36 °C [7], effectively lowering τ_c and further reducing d^* and Q^*. The temperature dependence of V_0 (through $\nu(T)$) is small over this range but non-negligible at the optimization level.

XII. CONCLUSIONS

We have developed the first analytical optimization framework for bidet nozzle design, yielding the following principal results:

1. **Optimal nozzle diameter.** At supply pressure ΔP, the water-minimizing nozzle diameter is $d^* = 2\, r_{\max}(C_W \tau_c/(3C_v^2 \Delta P))^{1/3}$. For nominal residential conditions, $d^* \approx 0.73$ mm, substantially smaller than the 1–2 mm nozzles found in commercial bidet designs.

2. **Minimum flow rate.** The corresponding minimum flow rate is $Q^* \propto \Delta P^{-1/6} \approx 0.29$ L/min. Commercial designs use 1.7–5.2× the theoretical minimum. The insensitivity of Q^* to pressure (exponent $-1/6$) means that nozzle sizing, not supply pressure, is the dominant design lever.

3. **Standoff independence.** The optimal parameters d^* and Q^* are independent of standoff distance to leading order, a consequence of momentum-flux conservation. A single nozzle specification is optimal across the full range of anatomical geometries and seating positions.

4. **Oblique impingement penalty.** A jet at angle θ from normal imposes a water penalty of $\cos^{-4/3}\theta$. The prevalent commercial 43° spray angle costs 52 % more water than normal impingement, identifying a clear target for hardware redesign.

5. **Oscillation as a conservation technology.** A $\pm 15°$ oscillating jet at $H = 80\,\text{mm}$ reduces minimum water consumption by 80 % relative to a steady jet, providing the first quantitative basis for the oscillating-nozzle design in premium products. The dwell time constraint is non-binding at all commercially relevant oscillation frequencies ($f \lesssim 2\,\text{Hz} \ll f_{\max} \approx 33\,\text{Hz}$).

The analysis is conservative throughout: the Watson Region I formula overestimates the required nozzle size, the true optimal nozzle is smaller, and the true minimum flow rate is lower. These results provide actionable design specifications that, if implemented, would reduce point-of-use bidet water consumption by 80–95% relative to current commercial products while maintaining or improving cleaning coverage.

---

[1] Beitelmal, A. H., Saad, M. A., and Patel, C. D. (2000). The effect of inclination on the heat transfer between a flat surface and an impinging two-dimensional air jet. *International Journal of Heat and Fluid Flow*, 21(2), 156–163.

[2] European Hygienic Engineering and Design Group (2003). *EHEDG Guidelines: Hygienic Design Criteria for Equipment Used in the Food Industry*.

[3] Lefebvre, A. H. (1988). *Atomization and Sprays*. Hemisphere Publishing, New York.

[4] Phares, D. J., Smedley, G. T., and Flagan, R. C. (2000). The wall shear stress produced by the normal impingement of a jet on a flat surface. *Journal of Fluid Mechanics*, 418, 351–375.

[5] Pope, S. B. (2000). *Turbulent Flows*. Cambridge University Press, Cambridge.

[6] Watson, E. J. (1964). The radial spread of a liquid jet over a horizontal plane. *Journal of Fluid Mechanics*, 20(3), 481–499.

[7] Woolley, M., et al. (2014). Shear rheological properties of fresh human faeces with different moisture content. *Water Science & Technology*, 69(11), 2350–2355.

[8] Zuckerman, N., and Lior, N. (2006). Jet impingement heat transfer: Physics, correlations, and numerical modeling. *Advances in Heat Transfer*, 39, 565–631.