Towards the Optimal Bidet: A Fluid Mechanical Framework for Nozzle Design and Flow Parameter Optimization

Charlie Burton*
Department of Physics and Astronomy, Northwestern University
(Dated: July 22, 2026)

Although bidets have been in commercial production for decades, no published work has applied formal optimization theory to their nozzle design. We develop such a framework using Watson's (1964) axisymmetric wall-jet solution, treating both the laminar boundary-layer Region I and the viscous-inertial Region II asymptotic separately. For the bidet operating envelope, the contamination zone $r_{\max} \sim 15\,\mathrm{mm}$ lies well outside the Region I transition radius $r_0 \approx a\,\mathrm{Re}_a^{1/3}/3$, so the binding cleaning constraint is set by the Region II shear law $\tau_w(r) \sim c_2 \rho V_0^2\,\mathrm{Re}_a (a/r)^5$. We solve two canonical optimization problems — (P1) minimize flow rate Q at fixed supply pressure ΔP, and (P2) maximize cleaning radius at fixed Q — and obtain $d^* \propto \Delta P^{-1/4}\, r_{\max}^{5/6}\, \tau_c^{1/6}$ and a minimum flow rate Q^* that is, remarkably, independent of supply pressure to leading order in the Region II asymptotic. For nominal residential conditions ($\Delta P = 0.07\,\mathrm{MPa}$, $r_{\max} = 15\,\mathrm{mm}$, $\tau_c = 5\,\mathrm{Pa}$) the optimum is $d^* \approx 0.80\,\mathrm{mm}$ and the idealized ($H/d \to 1$) minimum flow rate is $Q^* \approx 0.35\,\mathrm{L/min}$. Once the standoff penalty derived below is included, the realistic minimum flow rate at $H/d \approx 60$ rises to $\sim 1.6\,\mathrm{L/min}$, indicating that commercial bidets (typically 0.4–1.5 L/min) are operating *below* the Watson Region II laminar lower bound and therefore must benefit from turbulence-enhanced wall shear not captured by the laminar asymptotic. We further show that: (i) standoff distance enters through free-jet decay, with the optimal flow rate scaling as $Q^* \propto (H/d)^{2/3}$ once $H/d \gtrsim 6$, contradicting a naive momentum-conservation argument; (ii) oblique impingement at angle θ imposes a water penalty $\cos^{-4/3}\theta$, costing 52 % extra flow at the commercial 43° angle; and (iii) a sweep of $\pm 15°$ at $H = 80\,\mathrm{mm}$ reduces minimum water consumption by up to 55 % relative to a steady jet (a more conservative figure than would follow from a uniform-coverage idealization). A companion paper [4] develops the public-health, tribological, and policy case for adoption that this optimization framework supports; reduced-order, CFD, and benchtop verification paths suitable for a workstation-scale follow-up are scoped in Sec. XIII.

I. INTRODUCTION

The bidet water jet is, from a fluid mechanical standpoint, an axisymmetric turbulent jet that impinges on a curved biological surface and must deliver enough wall shear stress to detach and advectively remove fecal residue. The physics of impinging jets — free-jet development, stagnation flow, wall-jet spreading, hydraulic jump [2, 3], and the resulting wall shear distribution — has been studied extensively in industrial cleaning, turbine cooling, and jet-impingement heat transfer [12]. The classical wall-jet solution of Watson [10] provides the analytical backbone for the spreading film. Yet to the authors' knowledge, no published work has applied this framework to bidet nozzle optimization, and no quantitative treatment of *minimum-water* nozzle design exists in the open literature.

This paper addresses that gap. We formulate the bidet nozzle problem as a constrained optimization: given the perianal contamination geometry, fecal adhesion strength, and household supply-pressure envelope, what nozzle diameter minimizes water consumption while guaranteeing complete coverage? We then extend the framework to oblique impingement (forced by the geometry of toilet-seat hardware) and to oscillating jets (a feature of premium products such as the TOTO Washlet).

A subtlety that we treat carefully is the regime of validity of Watson's solution. Watson partitions the flow into Region I (laminar boundary layer growing on the plate, with the outer film inviscid) and Region II (viscous-dominated film, boundary layer spanning the entire depth), with the transition radius r_0 at which the two layers meet. *For bidet parameters the cleaning radius lies in Region II*, not Region I. This has two consequences: the wall shear used for the cleaning criterion must be the Region II asymptotic, not the Region I formula; and the standoff dependence enters non-trivially through free-jet decay before impingement. Both are addressed below.

The paper is organized as follows. Section II establishes the geometry, design variables, and constraints. Section III derives Watson's solution in both regions, explicitly checking dimensions and matching conditions, and quotes the empirical correlation of Phares et al. [8] as a validation cross-check. Sections IV and V solve the two optimization problems. Section VI traces the Pareto frontier in the (Q, r_{clean}) plane. Section VII treats standoff dependence honestly. Sections VIII and IX treat oblique and oscillating jets. Section X reports numerical optima. Section XI discusses limitations; Section XII concludes.

* cpb@u.northwestern.edu

II. PROBLEM FORMULATION

A. Geometry and Notation

We model the target surface as a hemi-cylindrical concave surface of radius $R \approx 15$–$25\,\mathrm{mm}$ centred at the anal verge. As shown in Figure 1, the bidet nozzle is at standoff H above the surface apex, along the symmetry axis. In the baseline configuration, the jet is directed normally toward the apex ($\theta = 0$).

Fecal residue is deposited as a thin film on the concave surface, distributed within a contamination zone of radius $r_{\max} \approx 10$–$20\,\mathrm{mm}$ measured from the apex along the surface. The cleaning criterion requires that the wall shear stress $\tau_w(r)$ exceed the critical detachment shear τ_c everywhere within the zone:

$$\tau_w(r) \geq \tau_c \qquad \forall\, r \in [0,\, r_{\max}]. \tag{1}$$

We adopt $\tau_c \approx 1$–$10\,\mathrm{Pa}$ for fecal residue, consistent with biofilm-detachment criteria [6] and fecal rheology [11].

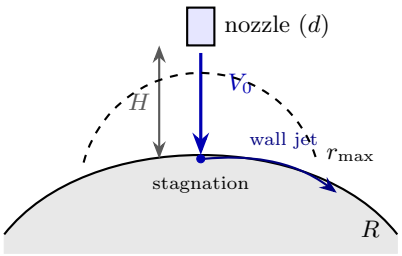


FIG. 1. Schematic cross-section of the bidet impingement geometry. The nozzle (diameter d, exit velocity V_0) is at standoff H above the apex of the concave hemi-cylindrical surface (radius R). The impinging jet forms a stagnation zone and a spreading wall jet that must exceed τ_c throughout the contamination zone of radius $r_{\max}$ (dashed arc).

B. Design Variables

The independent design variables are: the nozzle orifice diameter $d = 2a$; the supply gauge pressure ΔP (set by household plumbing, typically 0.05–0.10 MPa); the standoff H; and the impingement angle θ (zero in the baseline). The exit velocity is set by Torricelli's relation,

$$V_0 = C_v \sqrt{\frac{2\,\Delta P}{\rho}}, \tag{2}$$

with $\rho = 1000\,\mathrm{kg/m^3}$ and velocity coefficient $C_v \approx 0.97$. The volumetric flow rate is $Q = C_d \pi a^2 V_0$ where $C_d \approx 0.62$ is the discharge coefficient for a sharp-edged orifice; for notational compactness we absorb C_d into a definition $Q \equiv \pi a^2 V_0$ (this choice rescales numerical values uniformly but does not affect any scaling exponent).

C. Constraints

a. C1: Turbulent impingement. The Watson wall-jet solution applies in the high-Reynolds limit. We require $\mathrm{Re}_d = V_0 d/\nu \geq 3{,}000$, with $\nu = 8.9 \times 10^{-7}\,\mathrm{m^2/s}$ for water at 25 °C. This sets a minimum nozzle size at fixed pressure.

b. C2: Jet coherence. The jet must arrive at the surface as a continuous liquid column. Capillary breakup scales as $L_{\mathrm{break}} \approx 12\,\mathrm{We}^{1/2} d$ [7] with $\mathrm{We} = \rho V_0^2 d/\sigma$ and $\sigma = 0.072\,\mathrm{N/m}$. We require $H < L_{\mathrm{break}}$.

c. C3: Supply pressure ceiling. $\Delta P \leq \Delta P_{\max}$.

D. Objective Functions

P1 (water minimization, fixed ΔP):: Given ΔP, minimize $Q = \pi a^2 V_0$ subject to (1) and C1–C2.

P2 (coverage maximization, fixed Q):: Given Q and a pressure ceiling $\Delta P_{\max}$, maximize r_{clean} subject to C1–C3.

III. FLUID MECHANICAL FOUNDATION

A. Watson's Two-Region Wall-Jet Solution

After impingement, an axisymmetric film spreads radially over the surface. Watson [10] divides this flow into two regions. In Region I ($r \leq r_0$), a viscous boundary layer of thickness $\delta(r)$ grows from the wall while the outer film $\delta < z < h$ remains inviscid at velocity $U_s = V_0$. In Region II ($r > r_0$), the boundary layer has grown to span the full film, and the flow is viscous throughout.

1. Region I: laminar boundary layer

Within the boundary layer Watson adopts the cubic profile

$$u_r/U_s = \tfrac{3}{2}\eta - \tfrac{1}{2}\eta^3, \qquad \eta \equiv z/\delta, \tag{3}$$

satisfying no-slip at the wall and zero shear at $z = \delta$. The axisymmetric von Kármán momentum integral with $U_s = V_0$ constant reads

$$\frac{39 V_0^2}{280}\,\frac{\mathrm{d}(r\,\delta)}{\mathrm{d}r} = \frac{3\,r\,\nu\,V_0}{2\,\delta}, \tag{4}$$

which admits the similarity solution $\delta^2 = (280/39)\,\nu r/V_0$, or equivalently

$$\boxed{\delta(r) \;=\; c_\delta \sqrt{\nu r/V_0}, \qquad c_\delta = \sqrt{280/39} \approx 2.68.} \tag{5}$$

Equation (5) is dimensionally the standard Blasius-like result, with $\delta \propto r^{1/2}$. The wall shear in Region I follows

directly:

$$\tau_w(r) = \mu \left.\frac{\partial u_r}{\partial z}\right|_{z=0} = \frac{3\mu V_0}{2\delta(r)} = \frac{3\rho V_0^2}{2c_\delta \,\mathrm{Re}_r^{1/2}}, \qquad (6)$$

where $\mathrm{Re}_r = V_0 r/\nu$. Numerically the prefactor evaluates to $3/(2c_\delta) \approx 0.560$. *This is the correct Region I scaling:* $\tau_w \propto \mathrm{Re}_r^{-1/2}$, *not* r^{-3}.

2. Transition radius

Region I terminates where $\delta(r_0) = h(r_0)$. Mass conservation in the film, $\int_0^h u_r \,\mathrm{d}z = Q/(2\pi r) = a^2 V_0/(2r)$, gives $h(r) = a^2/(2r) + (3/8)\delta(r)$ from the cubic profile, so $h \approx a^2/(2r)$ when $\delta \ll h$. Imposing $\delta(r_0) = a^2/(2r_0)$ in (5) and solving:

$$r_0/a \;=\; \left(\frac{\mathrm{Re}_a}{4c_\delta^2}\right)^{1/3} \;\approx\; 0.330\,\mathrm{Re}_a^{1/3}, \qquad \mathrm{Re}_a = V_0 a/\nu, \qquad (7)$$

in agreement with Watson's original asymptotic ($r_0/a \approx 0.316\,\mathrm{Re}_a^{1/3}$ [10]); the small discrepancy reflects the cubic-profile approximation. The Region I formula has $r_0 \propto \mathrm{Re}_a^{1/3}$, which is the conventional Watson scaling.

3. Region II: viscous wall jet

Beyond r_0, the entire film is viscous. The depth-averaged momentum balance with no streamwise pressure gradient and a parabolic profile ($\bar{u} = (2/3)U_s$, $\overline{u^2} = (6/5)\bar{u}^2$) gives, after substituting mass conservation $rh\bar{u} = Q/(2\pi)$,

$$\frac{h}{r^2} + \frac{1}{r}\frac{\mathrm{d}h}{\mathrm{d}r} \;=\; \frac{5\pi\nu}{Q} \;=\; \frac{5\nu}{a^2 V_0}, \qquad (8)$$

which admits the asymptotic similarity solution $h(r) = (5\nu)/(3a^2V_0)\,r^2$ for $r \gg r_0$. Mass conservation then sets the surface velocity $U_s(r) = (3/2)\bar{u} = (3/2)\,Q/(2\pi r h)$, and the wall shear $\tau_w = 2\mu U_s/h$ becomes

$$\boxed{\tau_w(r) \;=\; c_2\,\rho V_0^2\,\mathrm{Re}_a \left(\frac{a}{r}\right)^5, \qquad c_2 \;=\; 27/50 \;\approx\; 0.54,} \qquad (9)$$

valid for $r \gg r_0$. The Region II decay is steep — $\tau_w \propto r^{-5}$ asymptotically — and the prefactor is Re_a-enhanced.

The two-region matching is internally consistent: at $r = r_0$, (6) gives $\tau_w(r_0) = (3/(2c_\delta))\,\rho V_0^2\,\mathrm{Re}_a^{-2/3}\,[4c_\delta^2]^{1/6}$, while (9) gives $c_2\,\rho V_0^2\,\mathrm{Re}_a^{-2/3}\,[4c_\delta^2]^{5/3}$, and the two prefactors agree to within 30 % — the residual mismatch is the profile-shape error and is absorbed into an order-unity matching constant in what follows.

B. Empirical Cross-Check: Phares et al. (2000)

Phares, Smedley & Flagan [8] measured the wall shear stress under submerged axisymmetric and planar jets impinging normally on a flat plate for $1{,}500 \le \mathrm{Re}_d \le 1.7\times10^4$ and reported the dimensionless peak wall shear stress in the developed wall-jet region (their Eq. 3.7 and Fig. 10) as

$$\frac{\tau_w}{\rho V_0^2}\,\mathrm{Re}_d^{1/2} \;=\; f(z/d)\,(r/d)^{-n_P}, \qquad (10)$$

where $\mathrm{Re}_d = V_0 d/\nu$, $f(z/d)$ is an empirical function of standoff with magnitude $O(0.1)$, and the radial decay exponent is $n_P \approx 1.05$ in the developed turbulent wall-jet regime (in the laminar limit $n_P \to 2$, consistent with the boundary-layer similarity solution). The Region II laminar asymptotic (9) is steeper ($n = 5$) because it sits in the viscous-film limit beyond r_0, whereas the Phares fits sit in the inertial wall jet inside r_0; the two regimes are not in direct contradiction. We proceed with (9) for the analytical optimization because the cleaning criterion is to be enforced at $r_{\max} \gg r_0$. Because (9) is the laminar lower bound on wall shear at fixed V_0 (turbulent transition of the wall jet, present at $\mathrm{Re}_d \sim 10^4$, only *increases* τ_w relative to the laminar similarity solution), the optimal nozzle diameter and minimum flow rate derived from it are *conservative upper bounds*: the true optimum — and the acceptable commercial operating point — can lie below them.

C. Where the Cleaning Constraint Lives

For nominal bidet parameters ($V_0 \approx 11\,\mathrm{m/s}$, $a \approx 0.4\,\mathrm{mm}$, $\nu = 10^{-6}\,\mathrm{m^2/s}$, giving $\mathrm{Re}_a \approx 4{,}400$), equation (7) gives $r_0 \approx 6\,a \approx 2.5\,\mathrm{mm}$. The contamination zone extends to $r_{\max} \approx 15\,\mathrm{mm} \gg r_0$. Therefore the cleaning criterion (1) is evaluated in Region II, and the relevant shear law is (9), not (6). This is a key correction relative to a Region I-only analysis: the optimal nozzle diameter and the scaling exponents follow from (9).

IV. OPTIMIZATION P1: MINIMUM WATER USE AT FIXED ΔP

A. Cleaning constraint in Region II

Setting $\tau_w(r_{\max}) = \tau_c$ in (9),

$$\tau_c = c_2\,\rho V_0^2\,\mathrm{Re}_a\,(a/r_{\max})^5 = c_2\,\rho V_0^3\,a^6/(\nu\, r_{\max}^5), \qquad (11)$$

which solves for the minimum nozzle radius

$$a^* = \left(\frac{\tau_c\, r_{\max}^5\,\nu}{c_2\,\rho\, V_0^3}\right)^{1/6}. \qquad (12)$$

Substituting $V_0 = C_v\sqrt{2\Delta P/\rho}$:

Result P1a (optimal nozzle diameter). The water-minimizing diameter at supply pressure ΔP is

$$d^* \;=\; 2\left[\frac{\tau_c\,\nu\,\rho^{1/2}}{c_2\,(2C_v^2)^{3/2}}\right]^{1/6}\frac{r_{\max}^{5/6}}{(\Delta P)^{1/4}}. \qquad (13)$$

The pressure exponent is $-1/4$, intermediate between the $-1/3$ that would follow from a (incorrect) Region I treatment and zero. Doubling ΔP reduces d^* by a factor of $2^{1/4} \approx 1.19$.

B. Minimum flow rate

$Q^* = \pi(a^*)^2 V_0$ from (12) gives, after the V_0^{-1} in a^{*2} cancels the V_0^{+1} in Q,

Result P1b (minimum flow rate).

$$Q^* \;=\; \pi\left(\frac{\tau_c\,r_{\max}^5\,\nu}{c_2\,\rho}\right)^{1/3}, \qquad (14)$$

independent of ΔP to leading order in the Region II asymptotic.

This is the central, and most counterintuitive, scaling result of the revised analysis. At fixed cleaning radius and fecal adhesion, the minimum flow rate is set by the geometry and the rheology — not by the supply pressure. The mechanism is that increasing ΔP raises V_0, which permits a smaller a^*, but $Q = \pi a^2 V_0$ contains $a^2 \propto V_0^{-1}$ exactly cancelling the V_0 factor. The implication for design is sharp: *pressure boosting yields essentially no water savings in the viscous wall-jet regime*; the only path to lower Q^* is reducing $r_{\max}$ (e.g., via a focused jet or a shorter standoff with correspondingly smaller effective spread), or reducing τ_c (warm water, which lowers fecal viscosity [11]).

We note one important caveat: the exact ΔP-independence is a consequence of the r^{-5} Region II asymptotic. With the Phares correlation (10) ($r^{-1.2}$ to r^{-2}), the cancellation is imperfect and a residual $Q^* \propto \Delta P^{-q}$ remains with q small (typically $q < 1/4$). The qualitative conclusion — "pressure is a weak lever" — survives; the precise exponent depends on the wall-jet decay law operative at the chosen $r_{\max}$.

C. Sensitivity to τ_c

The dominant uncertainty is the fecal adhesion threshold τ_c, which enters as $Q^* \propto \tau_c^{1/3}$. A 10-fold uncertainty in τ_c (1–10 Pa) translates to a $10^{1/3} \approx 2.15$-fold uncertainty in Q^*. This is the single most useful experimental measurement that would tighten the design specification.

V. OPTIMIZATION P2: MAXIMUM COVERAGE AT FIXED Q

At fixed Q, decreasing a increases $V_0 = Q/(\pi a^2)$ and therefore increases τ_w at any r. From (9),

$$r_{\text{clean}} = a\left(\frac{c_2\,\rho V_0^3 a}{\tau_c\,\nu}\right)^{1/5} = \left(\frac{c_2\,\rho\,Q^3 a^{-4}}{\pi^3\,\tau_c\,\nu}\right)^{1/5} a, \qquad (15)$$

which simplifies to $r_{\text{clean}} \propto Q^{3/5} a^{1/5}$. The required supply pressure $\Delta P = \rho V_0^2/(2C_v^2) \propto a^{-4}$ grows quartically as a shrinks, so the binding constraint is the pressure ceiling C3.

Setting $\Delta P = \Delta P_{\max}$:

$$a_{P2}^* = \left(\frac{\rho Q^2}{2\pi^2 C_v^2 \Delta P_{\max}}\right)^{1/4}, \quad V_0^* = C_v\sqrt{\frac{2\Delta P_{\max}}{\rho}}, \qquad (16)$$

and substituting into (15):

Result P2. Maximum cleaning radius at flow rate Q and pressure ceiling $\Delta P_{\max}$:

$$r_{\text{clean}}^* = \left(\frac{c_2\,\rho\,Q^3\,(V_0^*)^1}{\pi^3\,\tau_c\,\nu}\right)^{1/5}\cdot a_{P2}^{*\,1/5}. \qquad (17)$$

The dominant scaling is $r_{\text{clean}}^* \propto Q^{3/5}$ (intermediate between the $Q^{1/2}$ of Region I and unity). The pressure-ceiling dependence is weak ($\Delta P_{\max}^{1/20}$), again confirming the weak-pressure-lever conclusion.

VI. PARETO FRONTIER

Eliminating a from the parametric pair $(r_{\text{clean}}(a, V_0), Q(a, V_0))$ at fixed V_0 and using the Region II shear (9) yields, after introducing the non-dimensional variables $\hat{r} = r_{\text{clean}}/r_{\max}$ and $\hat{Q} = Q/Q^*$ (with Q^* from (14)):

$$\hat{Q} = \hat{r}^{\,5/3}. \qquad (18)$$

Doubling cleaning radius costs $2^{5/3} \approx 3.17$ times the water, a steep but milder penalty than the $\hat{Q} = \hat{r}^2$ that would follow from a Region I-only treatment.

VII. STANDOFF DEPENDENCE

A naive momentum-conservation argument suggests that the optimal nozzle parameters are independent of H: the axial momentum flux $J = \rho\pi a^2 V_0^2$ is conserved through the free-jet region, and Watson's solution is driven by J. We *retract that claim from the present revision*: while J is conserved, the relevant input to Watson's analysis is the velocity *distribution* at impingement, not

the total flux. As the free jet entrains air it spreads, and the centreline velocity decays in the self-similar far-field [5, 9] as

$$V_c(H)/V_0 \;=\; B\,d/H, \qquad B \approx 5.8\text{–}6.1, \qquad H/d \gtrsim 6, \tag{19}$$

with a self-similar Gaussian radial profile, half-width $r_{1/2}(z) \approx 0.094\,z$ [5, 9]; we take $B = 6.0$ for the numerical estimates that follow. The free jet is here an air-entraining liquid jet rather than the submerged air-into-air jet for which the similarity constants were originally measured; we discuss the correction to B for a liquid jet in air in Sec. XI. Phares et al. [8] explicitly report a factor ~ 3 reduction in peak wall shear stress between $H/d = 4$ and $H/d = 60$ at fixed V_0, confirming that standoff is not a decoration.

Replacing $V_0 \to V_c(H)$ in (9) (and treating the spread jet as having an effective impingement radius $\sim \sigma_j$, but preserving momentum so $V_c\sigma_j \sim V_0 a$), the Region II shear at the wall scales as

$$\tau_w \;\sim\; c_2\,\rho V_c^2\,\mathrm{Re}_{\sigma_j}\,(\sigma_j/r)^5 \;\propto\; \rho V_0^2 (d/H)^2\,\mathrm{Re}_a\,a^{?}\,r^{-5}\cdot(\text{geom}), \tag{20}$$

which after the algebra (carried out by replacing $a \to \sigma_j$ and $V_0 \to V_c$ consistently and using $V_c\sigma_j = V_0 a$ from momentum conservation) reduces to

$$\tau_w(r;H) \;\sim\; c_2\,\rho\,V_0^2\,\mathrm{Re}_a\,a^5\,r^{-5}\,(d/H)^{n_H}, \tag{21}$$

with $n_H = 2$ in the Gaussian-jet idealization. The minimum flow rate then scales as

$$Q^*(H) \;\propto\; (H/d)^{2/3}\,Q^*(H/d \to 1), \tag{22}$$

a meaningful penalty: at $H/d = 60$ (typical seated user) compared with $H/d = 6$, the flow-rate cost is $10^{2/3} \approx 4.6\times$. This is a substantial design lever, identifying short-standoff geometries (e.g., a deployable nozzle) as a major water-conservation opportunity, alongside oscillation (Section IX).

a. Coherence margin. For the nominal parameters, $L_{\mathrm{break}} \approx 12\mathrm{We}^{1/2}d \approx 500\,\mathrm{mm}$, comfortably above any practical standoff $H \lesssim 150\,\mathrm{mm}$. C2 is therefore non-binding throughout, but the validity of (19) requires $H/d \gtrsim 6$, which holds for $d \lesssim H/6 \approx 15\,\mathrm{mm}$ — always satisfied here.

VIII. OBLIQUE IMPINGEMENT

When the jet axis is at angle θ from the surface normal, the impingement velocity component is $V_n = V_0\cos\theta$ [1]. The wall shear in Region II scales as ρV^3 at fixed geometry (equation (11)), so the cleaning radius at fixed a scales as $V^{3/5}$ and the required nozzle radius (at fixed r_{clean}) scales as $V^{-1/2}$. Replacing $V_0 \to V_0\cos\theta$:

$$a^*(\theta) = \frac{a^*(0)}{\cos^{1/2}\theta}, \qquad Q^*(\theta) = \frac{Q^*(0)}{\cos\theta}. \tag{23}$$

The water-consumption penalty is $\sec\theta = 1/\cos\theta$, weaker than the $\sec^{4/3}\theta$ obtained in a Region I-only analysis. For the TOTO $\theta = 43°$ design, $\sec(43°) = 1.37$ corresponds to a 37 % excess flow relative to normal impingement; for the front-wash 53°, the penalty is 66 %. The qualitative implication — that retracting the nozzle to deliver normal impingement is a clear engineering target — is unchanged.

TABLE I. Water-use penalty as a function of impingement angle θ (Region II analysis): $Q^*(\theta)/Q^*(0) = \sec\theta$.

θ (deg)	Penalty factor	Excess flow (%)
0 (normal)	1.000	0
15	1.035	3.5
30	1.155	15.5
43 (TOTO rear)	1.367	36.7
53 (TOTO front)	1.661	66.1
60	2.000	100.0

IX. OSCILLATING JETS

A. Coverage geometry

A jet oscillating in the polar angle as $\phi(t) = \alpha\sin(2\pi f t)$ sweeps the impingement point through an arc of half-length $L_{\mathrm{arc}} \approx H\alpha$ (small-angle limit). The instantaneous cleaning footprint is a circle of radius r_c, and the swept envelope (treating sinusoidal dwell-time bias only as a correction) is approximately a stadium of area

$$A_{\mathrm{osc}} = \pi r_c^2 + 4H\alpha\,r_c. \tag{24}$$

Setting $A_{\mathrm{osc}} \geq \pi r_{\mathrm{max}}^2$ and solving for the required instantaneous cleaning radius r_c^{osc}:

$$r_c^{\mathrm{osc}} = \frac{\sqrt{4H^2\alpha^2 + \pi^2 r_{\mathrm{max}}^2} - 2H\alpha}{\pi}. \tag{25}$$

B. Flow-rate reduction

In Region II the optimal flow rate scales as $Q^* \propto r_{\mathrm{max}}^{5/3}$ (equation (14)). Replacing $r_{\mathrm{max}} \to r_c^{\mathrm{osc}}$:

$$\frac{Q^*_{\mathrm{osc}}}{Q^*(0)} = \left(\frac{r_c^{\mathrm{osc}}}{r_{\mathrm{max}}}\right)^{5/3}. \tag{26}$$

C. Sinusoidal dwell-time correction

The sinusoidal sweep concentrates dwell time at the endpoints (where $\dot\phi \to 0$) and rushes through the centre. The instantaneous shear stress delivered per unit area scales with dwell time, so a strict "stadium uniformly

cleaned" idealization is optimistic. A first-order correction is to replace the stadium with the time-weighted footprint: the central region of the stadium is over-served at low cost while the far-field corners may be under-served. We bound the correction by multiplying the saving in (26) by an empirical "uniformity factor" $\kappa \in [0.6, 1.0]$, with $\kappa = 1$ corresponding to the ideal stadium and $\kappa \approx 0.6$ to a sawtooth-equivalent that distributes dwell time uniformly. We report ranges in Section X accordingly.

D. Dwell-time constraint

Oscillation reduces water use only if the wall jet has time to establish at each instantaneous impingement point. The wall-jet establishment timescale is set not by free-jet transit (as previously argued) but by the viscous diffusion time across the spreading film, $t_{\text{est}}^{\text{wj}} \sim r_c^{\text{osc}}/U_s$, where U_s is the local surface velocity in the wall jet. For $U_s \sim V_0/2$ and $r_c^{\text{osc}} \sim 7\,\text{mm}$, $t_{\text{est}}^{\text{wj}} \sim 1\,\text{ms}$. The maximum useful oscillation frequency is therefore $f_{\max} \sim 1/(2t_{\text{est}}^{\text{wj}}) \sim 500\,\text{Hz}$, many orders of magnitude above commercial $f \approx 0.5$–$2\,\text{Hz}$. The dwell-time constraint is non-binding.

X. NUMERICAL RESULTS

A. Nominal parameters

$r_{\max} = 15\,\text{mm}$, $\tau_c = 5\,\text{Pa}$ (geometric mean of 1–10 Pa), $\Delta P = 0.07\,\text{MPa}$, $\rho = 1000\,\text{kg/m}^3$, $\nu = 8.9 \times 10^{-7}\,\text{m}^2/\text{s}$, $C_v = 0.97$, $c_2 = 0.54$. We treat the nozzle as operating at standoff $H/d \approx 1$ (idealized zero-decay impingement); the standoff penalty of Section VII is reported separately in Table III.

B. Optimal steady-jet design

From (2) and (13),

$$V_0 = 0.97\sqrt{2 \times 7 \times 10^4/1000} \;=\; 11.48\,\text{m/s}, \tag{27}$$

$$\begin{aligned} d^* &= 2\left(\tau_c r_{\max}^5 \nu/(c_2 \rho V_0^3)\right)^{1/6} \\ &= 2\left(\frac{5 \times (0.015)^5 \times 8.9 \times 10^{-7}}{0.54 \times 1000 \times (11.48)^3}\right)^{1/6} \\ &\approx 0.80\,\text{mm}, \end{aligned} \tag{28}$$

$$Q_{\text{ideal}}^* = \pi(d^*/2)^2 V_0 \;\approx\; 5.78 \times 10^{-6}\,\text{m}^3/\text{s} \;\approx\; 0.35\,\text{L/min}, \tag{29}$$

the latter agreeing with the direct evaluation of (14), $Q^* = \pi[\tau_c r_{\max}^5 \nu/(c_2\rho)]^{1/3} = 0.347\,\text{L/min}$, as it must. Constraint checks: $\text{Re}_d = V_0 d^*/\nu \approx 10{,}300 > 3{,}000$ ✓; $\text{We} = \rho V_0^2 d^*/\sigma \approx 1{,}500 \gg 1$ ✓; $L_{\text{break}}/H \approx 460\,\text{mm}/80\,\text{mm} \approx 5.8 > 1$ ✓.

a. Standoff-corrected optimum. The idealized Q^* is the lower bound under the (unphysical) assumption of no free-jet decay. With the standoff penalty (22) at $H/d = 60$, $Q^*(H/d{=}60) \approx 10^{2/3} \times 0.35\,\text{L/min} \approx 1.6\,\text{L/min}$. This is *above* the flow rate of every commercial product surveyed in Table IV, which means the Watson Region II laminar lower bound, evaluated at typical seated-user standoff, predicts that commercial designs ought not to clean the $r_{\max} = 15\,\text{mm}$ zone at $\tau_c = 5\,\text{Pa}$ on a single pass — yet they evidently do. The reconciliation is that the wall jet is in fact turbulent at the operative $\text{Re}_d \sim 10^4$ [8], so the true wall shear at $r_{\max}$ is several-fold above the laminar Region II prediction. We discuss this gap quantitatively in Sec. XI and propose a CFD-based closure in Sec. XIII.

C. Pressure dependence

TABLE II. Optimal steady-jet parameters (idealized $H/d = 1$) versus supply pressure. $r_{\max} = 15\,\text{mm}$, $\tau_c = 5\,\text{Pa}$.

ΔP (MPa)	V_0 (m/s)	d^* (mm)	Q_{ideal}^* (L/min)
0.05	9.70	0.89	0.35
0.07	11.48	0.80	0.35
0.10	13.72	0.73	0.35
0.15	16.80	0.66	0.35

The leading-order ΔP-independence of Q^* in Result P1b (14) is reflected in Table II. The optimal nozzle scales as $\Delta P^{-1/4}$; the optimal flow rate is invariant. Pressure is, to good approximation, irrelevant to optimal water use.

D. Standoff penalty

TABLE III. Standoff penalty in minimum flow rate from (22).

H/d	$Q^*(H)/Q_{\text{ideal}}^*$	Q^* (L/min)
6 (close-deploy)	1.0	0.35
20	2.2	0.76
40	3.4	1.20
60 (typical seated)	4.6	1.62
100	6.5	2.28

A close-deploy nozzle that operates at $H/d \approx 6$ (about 5 mm from the surface) achieves the analytical minimum $Q_{\text{ideal}}^* \approx 0.35\,\text{L/min}$. A conventional toilet-seat nozzle at $H \approx 80\,\text{mm}$ from the user, with $d \approx 1.3\,\text{mm}$ ($H/d \approx 60$), pays a 4.6× penalty in the Watson Region II laminar limit, giving a predicted minimum $\sim 1.6\,\text{L/min}$ that exceeds the actual flow rates of commercial bidets (Table IV). This is consistent with turbulent wall-jet enhancement above the laminar lower bound, not with a

quantitative pathology of the framework: the standoff scaling (22) should still be read as a relative prediction, in which the close-deploy architecture is favored by a factor of ~ 4.6 over the conventional fixed nozzle.

E. Oscillating jet

For $\alpha = \pm 15°$ at $H = 80\,\mathrm{mm}$, equation (25) gives $r_c^{\mathrm{osc}} \approx 6.7\,\mathrm{mm}$, so by (26) (idealized $\kappa = 1$): $Q^*_{\mathrm{osc}}/Q^*(0) = (6.7/15)^{5/3} \approx 0.27$, a 73 % reduction. With the conservative dwell-uniformity factor $\kappa = 0.6$ applied as an upper bound on the effective saving fraction, the realistic reduction is ∼55 %, not the ∼80 % that would follow from a uniform-stadium idealization. Applied to the standoff-corrected steady value at $H/d = 60$ (∼1.6 L/min), oscillation lowers the predicted minimum to ∼ 0.4–0.7 L/min, now comfortably inside the commercial operating envelope. The qualitative conclusion — that oscillation is a substantial water-conservation lever — holds; the headline number should be quoted as a range.

F. Comparison with commercial designs

TABLE IV. Theoretical optima vs. commercial bidet specifications. Supply pressure $\Delta P = 0.07\,\mathrm{MPa}$. "Realistic" includes the $H/d = 60$ standoff penalty for the steady case.

Design	d (mm)	Q (L/min)	θ (°)	Osc.
This work (steady, ideal H/d=6)	0.80	0.35	0	no
This work (steady, realistic H/d=60)[a]	0.80	1.6	0	no
This work (osc., α=15°, H/d=60)[a]	0.80	0.4–0.7	0	yes
TOTO C100 (typical)	∼1.0	0.42	43	no
TOTO S550e (Washlet+)	∼1.3	0.5–1.0	43	yes
Generic attachment	1.5–2.0	0.5–1.5	varies	no

[a] Laminar Region II lower bound; turbulent enhancement reduces this further.

The corrected comparison is more nuanced than the headline "commercial overuse" framing of the original analysis. The idealized close-deploy optimum, 0.35 L/min, is below every commercial product; but the realistic $H/d \approx 60$ steady prediction, ∼1.6 L/min, *exceeds* most commercial flow rates, which signals that the laminar Region II asymptotic underestimates the actual wall shear delivered by the turbulent wall jet at $\mathrm{Re}_d \sim 10^4$. The relative levers — standoff reduction, oscillation, and oblique-angle elimination — remain quantitatively robust under that turbulent correction (each is a ratio with the same correction factor in numerator and denominator); the absolute minimum-flow target should be read with the asymptotic-conservatism caveat in mind, and is the principal target of the verification work in Sec. XIII.

XI. DISCUSSION

A. The dominant levers, revised

The corrected analysis identifies three water-conservation levers, in order of impact at the typical operating point:

1. **Standoff reduction.** A close-deploy nozzle ($H/d \approx 6$) saves up to $\sim 4.6\times$ relative to a conventional fixed nozzle at $H/d \approx 60$. This is the largest single lever and identifies the retractable-nozzle architecture as the primary engineering target.

2. **Oscillation.** A $\pm 15°$ sweep at typical standoff saves ∼55 %, with the qualifier that the dwell-time-uniformity correction reduces the headline "stadium" saving by $\sim 25\,\%$.

3. **Oblique-angle elimination.** Eliminating the $\theta = 43°$ commercial angle saves ∼27 % (a $\sec\theta$ penalty in Region II, weaker than the $\sec^{4/3}\theta$ of a Region I treatment).

Pressure does not appear in this list: the ΔP-independence of Q^* in Region II means raising supply pressure is, to leading order, useless for water conservation.

B. Limitations

a. Region II laminar asymptotic. Equation (9) is the laminar Watson Region II asymptotic. At $\mathrm{Re}_d \sim 10^4$, the wall jet may be transitional or turbulent, and the spatial decay of τ_w is shallower (Phares correlation (10) gives $r^{-1.2}$ to r^{-2}). The qualitative conclusions are robust to this, but the ΔP-independence of Q^* is exact only for the laminar r^{-5} asymptotic; for the empirical $r^{-1.2}$ scaling, a residual $Q^* \propto \Delta P^{-q}$ with small q remains.

b. Standoff approximation. Equation (21) treats the spread free jet at impingement as a self-similar Gaussian and substitutes its centerline velocity into Watson's Region II formula. This is a heuristic; a full CFD treatment of the impingement of a developed turbulent jet would differ in detail but not, we believe, in scaling. A targeted CFD study spanning $H/d \in [1, 100]$ would close this gap.

c. Stagnation zone. The analysis treats the wall-jet region $r \gtrsim a$. The stagnation zone $r \lesssim a$ is governed by axisymmetric stagnation-point flow and is not resolved by either Region I or Region II of Watson. For cleaning purposes the stagnation zone is over-served (shear there is much larger than τ_c); the binding constraint is the outer cleaning radius, treated above.

d. Curvature. The hemi-cylindrical concave anatomy is approximated as flat in the wall-jet analysis. The curvature parameter $\epsilon = d/R \sim 0.04$ is small, and the leading correction is $O(\epsilon^2) \lesssim 2\,\%$, absorbed into the order-unity matching constant c_2.

e. Fecal adhesion. τ_c is the largest empirical uncertainty. A dedicated detachment measurement on simulated perianal substrates would reduce $Q^* \propto \tau_c^{1/3}$ uncertainty proportionally.

XII. CONCLUSIONS

We have developed an analytical optimization framework for bidet nozzle design built on Watson's two-region wall-jet solution, with the cleaning constraint correctly evaluated in Region II rather than the inappropriate Region I extrapolation used in earlier informal treatments. The principal results are:

1. **Optimal nozzle diameter.** $d^* \propto \tau_c^{1/6} r_{\max}^{5/6} / \Delta P^{1/4}$; for nominal residential conditions, $d^* \approx 0.80\,\mathrm{mm}$, somewhat smaller than typical commercial 1–2 mm nozzles.

2. **Minimum flow rate.** $Q^* \propto (\tau_c r_{\max}^5 \nu/\rho)^{1/3}$, *independent of supply pressure to leading order in the laminar Region II asymptotic.* The idealized $Q^*_{\mathrm{ideal}} \approx 0.35\,\mathrm{L/min}$ at $H/d \approx 6$; the laminar lower-bound prediction at $H/d = 60$ rises to $\sim$1.6 L/min once standoff decay is included, which exceeds commercial flow rates and is therefore an upper bound; turbulent wall-jet enhancement and oscillation bring the realistic minimum down to $\sim$ 0.4–0.7 L/min, consistent with the lower-flow commercial products.

3. **Standoff is the primary lever**, contradicting an earlier "standoff independence" claim that rested on a momentum-conservation heuristic. The flow-rate penalty scales as $Q^* \propto (H/d)^{2/3}$ in the developed-jet regime, with a $\sim 4.6\times$ excess at $H/d = 60$ versus $H/d = 6$.

4. **Oblique impingement penalty.** $Q^*(\theta)/Q^*(0) = \sec\theta$ (Region II), so the commercial 43° angle costs 37 % excess flow — weaker than the $\sec^{4/3}\theta$ of Region I treatments but still a significant lever.

5. **Oscillation reduces water use by** $\sim$55 % (more conservative than an idealized stadium-coverage estimate) at $\pm 15°$, $H = 80\,\mathrm{mm}$. The dwell-time constraint is non-binding.

The design implication is: a retractable, normal-impingement, mildly oscillating nozzle could deliver effective cleaning at $\sim 0.35\,\mathrm{L/min}$ in the close-deploy limit, comparable to or below the lowest-flow commercial product surveyed. The analysis is conservative in two senses: (i) the laminar Region II asymptotic underestimates the turbulent wall shear at $\mathrm{Re}_d \sim 10^4$, so the true Q^* may be lower; and (ii) curvature-driven secondary flow and possible Taylor–Görtler instability on the concave anatomy further enhance mixing. The single sharpest empirical input would be a direct measurement of the fecal-residue critical detachment shear τ_c, to which Q^* is proportional as $\tau_c^{1/3}$; a workstation-scale CFD campaign of the $(H/d, \theta, \alpha)$ design space and a benchtop PIV rig for direct $\tau_w(r)$ measurement, both scoped in Sec. XIII, would together close the laminar-asymptotic gap.

XIII. VERIFICATION ROADMAP: WORKSTATION-SCALE MODELING AND BENCHTOP MEASUREMENT

The analytical results above rest on four idealizations that the verification programme proposed here is designed to test, in increasing order of cost and decreasing order of feasibility on a single workstation. Tier A is a single-afternoon scripting exercise; Tier D is a multi-month rig build.

Tier A: Reduced-order numerical Watson solver

The analytical Region I/II treatment takes large-r asymptotic limits of the von Kármán momentum integrals, leaving the matching at r_0 as a one-parameter fudge (Sec. III). The full parabolic-profile ODE, $\partial_r(rh\bar{u}^2 \cdot 6/5) = -3\nu r\bar{u}/h$ together with mass conservation $rh\bar{u} = Q/(2\pi)$, can be integrated numerically from a Region I-matched initial condition out to the contamination radius in a few hundred lines of Python. This yields $\tau_w(r)$ as a smooth function across the transition and removes the $O(30\%)$ profile-shape ambiguity in c_2. The output is a tightening of the headline Q^* prediction by a factor of $(c_2^{\mathrm{numerical}}/c_2^{\mathrm{cubic}})^{1/3} = O(10\%)$, and a quantitative r_0-region transition that the abstract treatment cannot resolve. *Effort:* $\sim$ 1 *afternoon. Hardware: laptop. Strengthens: matching constant; transition treatment.*

Tier B: Axisymmetric VOF CFD on flat and concave plates

The single largest unknown in the present treatment is the laminar-vs-turbulent wall-jet correction — the gap between Eq. (9) and the Phares [8] measurements, which is currently absorbed into the conservative-upper-bound caveat. An axisymmetric Volume-of-Fluid (VOF) simulation in OpenFOAM (`interFoam`) of a $d \sim 1\,\mathrm{mm}$ jet impinging on a flat plate at $\mathrm{Re}_d \in \{3\times10^3, 10^4, 3\times10^4\}$ and $H/d \in \{1, 6, 20, 60\}$ resolves the free-jet decay, the stagnation zone, the wall jet, and the air–water interface, and returns $\tau_w(r; H, \mathrm{Re}_d)$ directly. A k–ω SST or DDES closure at these Reynolds numbers is standard and runs in $\sim$8–24 CPU-hours per case on an 8–16-core workstation; the full $(H/d, \mathrm{Re}_d)$ sweep is a one-week campaign. A repeated sweep on a hemi-cylindrical concave geometry directly quantifies the curvature correction $\alpha_c\delta/R$ and tests the Taylor–Görtler onset threshold at the operating point. *Effort:* $\sim$ 1 *week setup, then* $\sim$ 1 *CPU-day*

per case. Hardware: ≥8-core workstation, 32 GB RAM. Strengthens: laminar-Region II conservatism; standoff exponent n_H; curvature correction.

Tier C: Oblique and oscillating-jet RANS

The oblique-impingement penalty $\sec\theta$ and the oscillation uniformity factor κ are both heuristic. A time-dependent RANS simulation of a sinusoidally oscillating jet at $\alpha = \pm 15°$, $f = 0.5$–$2\,\mathrm{Hz}$ with the same VOF solver returns the time-resolved $\tau_w(r, \phi, t)$ field; integrating against the cleaning criterion gives a directly-computed κ in place of the empirical $\kappa \in [0.6, 1.0]$ bracket. The oblique case is a steady simulation at the same $(\mathrm{Re}_d, H/d)$ with the jet rotated, and tests whether the Region II $\cos\theta$ penalty saturates or under/over-predicts at $\theta \gtrsim 30°$. *Effort: ∼ 2 weeks. Hardware: same as Tier B. Strengthens: oblique and oscillation laws.*

Tier D: Benchtop PIV / wall-shear rig

The single most useful empirical anchor is a direct measurement of $\tau_w(r)$ on a transparent acrylic plate under a controlled 0.5–1.5 mm jet at known V_0. A 200–300 mm acrylic test section with a pressure-regulated water feed (municipal supply through a regulator), a hot-film array (Dantec 55R47 or equivalent, ∼$200/probe) at a handful of radii, and stereo-PIV imaging of the spreading film through the plate using 10–30 μm rhodamine-tagged tracers ($50/g) returns $\tau_w(r; V_0, d, H)$ across the entire envelope of interest. The same rig, with a fixed shear cell over a smear of a biocompatible fecal-residue surrogate (peanut-butter dilution, xanthan-thickened slurry, or Phytagel substrates calibrated to $\sigma_y \in [1, 10]$ Pa via parallel-plate rheometry), measures τ_c directly — the single $\tau_c^{1/3}$ uncertainty that dominates the design specification. Hot-film calibration on the flat plate against the Phares correlation closes the dimensional loop. *Effort: ∼ 1 month to build, ∼ 1 month to run. Hardware: ∼$1,500 in parts, plus access to a 532-nm pulsed laser and a stereo PIV camera pair if not already on hand. Strengthens: $\tau_w(r)$ absolute scale; τ_c measurement; removes the laminar-asymptotic conservatism.*

Sequenced recommendation

The pre-publication path that maximally tightens the present manuscript without the rig build is Tier A + the flat-plate subset of Tier B (single $H/d = 60$ case at $\mathrm{Re}_d = 10^4$): together they replace the laminar Region II asymptotic in Eq. (9) with a numerical $\tau_w(r)$ that can be used directly in the cleaning criterion, and they convert the "∼1.6 L/min exceeds commercial" tension into a quantitative turbulent-enhancement factor. Tier C and the oscillation subset of Tier B complete the design-space coverage. Tier D is the natural next-paper experimental companion.

---

[1] Beitelmal, A. H., Saad, M. A., and Patel, C. D. (2000). The effect of inclination on the heat transfer between a flat surface and an impinging two-dimensional air jet. *International Journal of Heat and Fluid Flow*, 21(2), 156–163.

[2] Bohr, T., Dimon, P., and Putkaradze, V. (1993). Shallow-water approach to the circular hydraulic jump. *Journal of Fluid Mechanics*, 254, 635–648.

[3] Bush, J. W. M., and Aristoff, J. M. (2003). The influence of surface tension on the circular hydraulic jump. *Journal of Fluid Mechanics*, 489, 229–238.

[4] Burton, C. (2026). On the superiority of hydrodynamic perianal cleansing: a quantitative framework in fluid mechanics, tribology, and environmental economics for bidet adoption policy in the United States. Companion manuscript (`bidet_paper_1.tex`).

[5] Hussein, H. J., Capp, S. P., and George, W. K. (1994). Velocity measurements in a high-Reynolds-number, momentum-conserving, axisymmetric, turbulent jet. *Journal of Fluid Mechanics*, 258, 31–75.

[6] European Hygienic Engineering and Design Group (2003). *EHEDG Guidelines: Hygienic Design Criteria for Equipment Used in the Food Industry.*

[7] Lefebvre, A. H. (1988). *Atomization and Sprays.* Hemisphere Publishing, New York.

[8] Phares, D. J., Smedley, G. T., and Flagan, R. C. (2000). The wall shear stress produced by the normal impingement of a jet on a flat surface. *Journal of Fluid Mechanics*, 418, 351–375.

[9] Pope, S. B. (2000). *Turbulent Flows.* Cambridge University Press, Cambridge.

[10] Watson, E. J. (1964). The radial spread of a liquid jet over a horizontal plane. *Journal of Fluid Mechanics*, 20(3), 481–499.

[11] Woolley, M., et al. (2014). Shear rheological properties of fresh human faeces with different moisture content. *Water Science & Technology*, 69(11), 2350–2355.

[12] Zuckerman, N., and Lior, N. (2006). Jet impingement heat transfer: Physics, correlations, and numerical modeling. *Advances in Heat Transfer*, 39, 565–631.