

Worksheet 13

To accompany Chapter 5.2 Fourier transforms of commonly occurring signals

This worksheet is available as a downloadable [PDF](#) ([../worksheets/worksheet13.pdf](#)) file.

We will step through this worksheet in class.

You are expected to have at least watched the video presentation of [Chapter 5.2](#) (https://cpjobling.github.io/eg-247-textbook/fourier_transform/2/ft2) of the [notes](#) (<https://cpjobling.github.io/eg-247-textbook>) before coming to class. If you haven't watch it afterwards!

Reminder of the Definitions

Last time we derived the Fourier Transform by evaluating what would happen when a periodic signal was made periodic. Let us restate the definitions.

The Fourier Transform

Used to convert a function of time $f(t)$ to a function of radian frequency $F(\omega)$:

$$\mathcal{F} \{ f(t) \} = \int_{-\infty}^{\infty} f(t) e^{-j\omega t} dt = F(\omega).$$

The Inverse Fourier Transform

Used to convert a function of frequency $F(\omega)$ to a function of time $f(t)$:

$$\mathcal{F}^{-1} \{ F(\omega) \} = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) e^{j\omega t} d\omega = f(t).$$

Note, the factor 2π is introduced because we are changing units from radians/second to seconds.

Duality of the transform

Note the similarity of the Fourier and its Inverse.

This has important consequences in filter design and later when we consider sampled data systems.

Table of Common Fourier Transform Pairs


This table is adapted from Table 8.9 of Karris. See also: [Wikibooks: Engineering Tables/Fourier Transform Table](http://en.wikibooks.org/wiki/Engineering_Tables/Fourier_Transform_Table) (http://en.wikibooks.org/wiki/Engineering_Tables/Fourier_Transform_Table) and [Fourier Transform—WolframMathworld](http://mathworld.wolfram.com/FourierTransform.html) (<http://mathworld.wolfram.com/FourierTransform.html>) for more complete references.

	Name	$f(t)$	$F(\omega)$	Remarks
1	Dirac delta	$\delta(t)$	1	Constant energy at <i>all</i> frequencies.
2	Time sample	$\delta(t - t_0)$	$e^{j\omega t_0}$	
3.	Phase shift	$e^{j\omega t_0}$	$2\pi\delta(\omega - \omega_0)$	
4.	<i>Signum</i>	$\text{sgn}(x)$	$\frac{2}{j\omega}$	also known as sign function
5.	Unit step	$u_0(t)$	$\frac{1}{j\omega} + \pi\delta(\omega)$	
6.	Cosine	$\cos \omega_0 t$	$\pi [\delta(\omega - \omega_0) + \delta(\omega + \omega_0)]$	
7.	Sine	$\sin \omega_0 t$	$-j\pi [\delta(\omega - \omega_0) - \delta(\omega + \omega_0)]$	
8.	Single pole	$e^{-at} u_0(t)$	$\frac{1}{j\omega + a}$	$a > 0$
9.	Double pole	$te^{-at} u_0(t)$	$\frac{1}{(j\omega + a)^2}$	$a > 0$
10.	Complex pole (cosine component)	$e^{-at} \cos \omega_0 t u_0(t)$	$\frac{j\omega + a}{((j\omega + a)^2 + \omega^2)}$	$a > 0$
11.	Complex pole (sine component)	$e^{-at} \sin \omega_0 t u_0(t)$	$\frac{\omega}{((j\omega + a)^2 + \omega^2)}$	$a > 0$
12.	Gating function (aka $\text{rect}(T)$)	$A [u_0(t + T) - u_0(t - T)]$	$2AT \frac{\sin \omega T}{\omega T}$	

Some Selected Fourier Transforms

The Dirac Delta

$$\delta(t) \Leftrightarrow 1$$

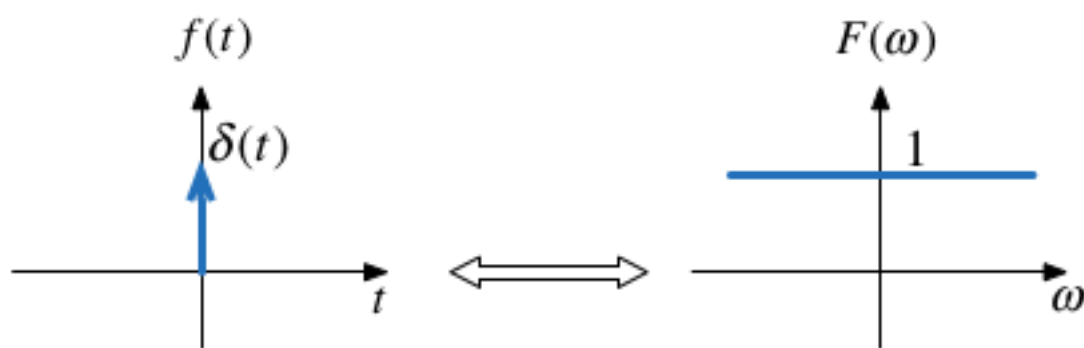

Proof: uses sampling and sifting properties of $\delta(t)$.

Matlab:

In []:

```
syms t omega omega_0 t0;  
fourier(dirac(t))
```

Related:


$$\delta(t - t_0) \Leftrightarrow e^{-j\omega t_0}$$

In []:

```
fourier(dirac(t - t0))
```

DC

$$1 \Leftrightarrow 2\pi\delta(\omega)$$

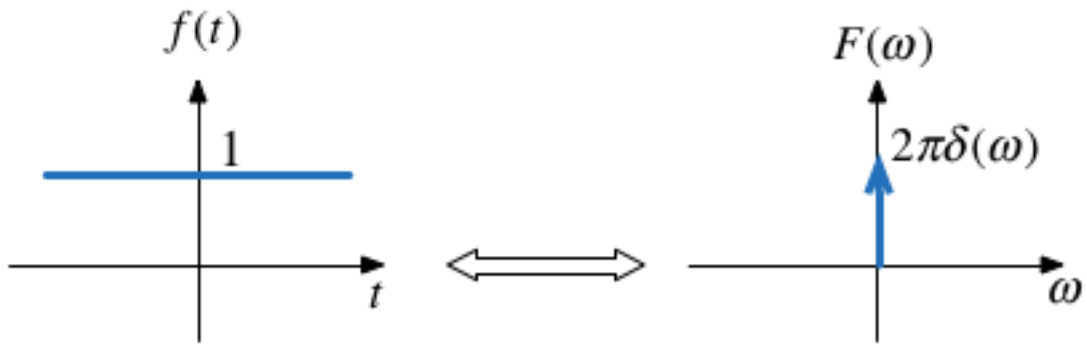

Matlab:

In []:


```
A = sym(1);  
fourier(A,omega)
```

Related by frequency shifting property:

$$e^{j\omega_0 t} \Leftrightarrow 2\pi\delta(\omega - \omega_0)$$

Cosine (Sinewave with even symmetry)

$$\cos(t) = \frac{1}{2} \left(e^{j\omega_0 t} + e^{-j\omega_0 t} \right) \Leftrightarrow \pi\delta(\omega - \omega_0) + \pi\delta(\omega + \omega_0)$$

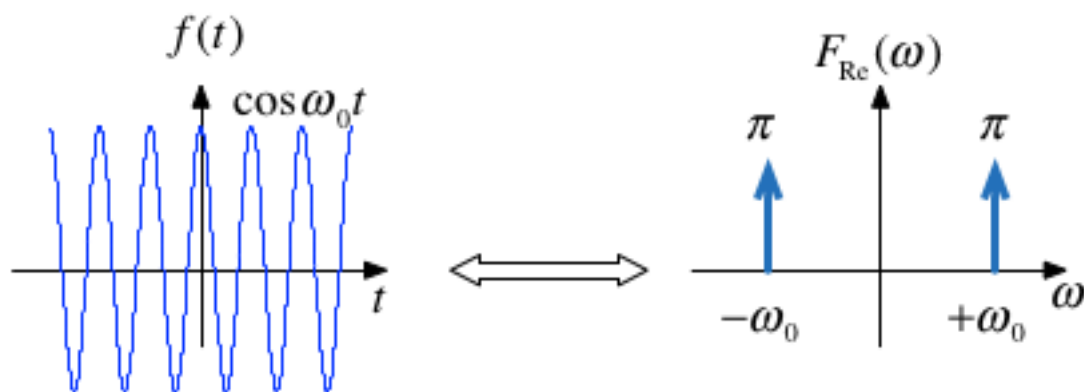

Note: $f(t)$ is real and even. $F(\omega)$ is also real and even.


Matlab:

In []:

```
fourier(cos(omega_0*t), omega)
```

Sinewave

$$\sin(t) = \frac{1}{j2} \left(e^{j\omega_0 t} - e^{-j\omega_0 t} \right) \Leftrightarrow -j\pi\delta(\omega - \omega_0) + j\pi\delta(\omega + \omega_0)$$

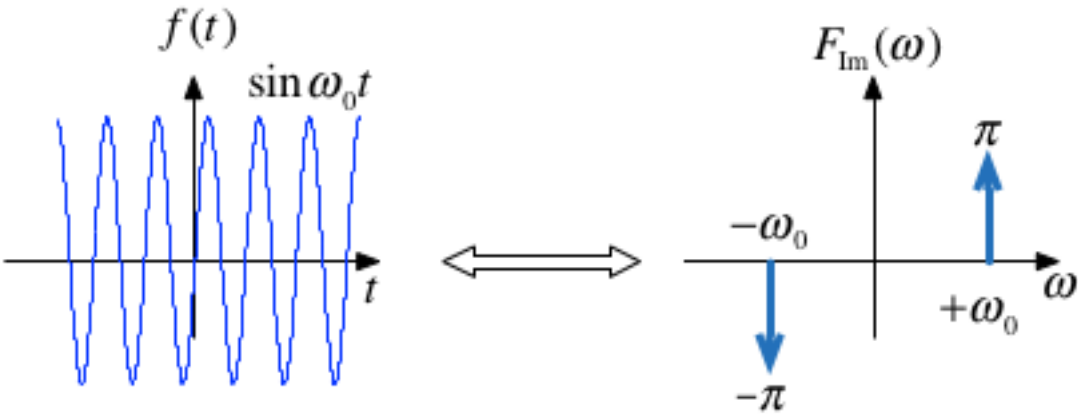

Note: $f(t)$ is real and odd. $F(\omega)$ is imaginary and odd.

Matlab:

In []:

```
fourier(sin(omega_0*t), omega)
```

Signum (Sign)

The signum function is a function whose value is equal to

$$\text{sgn } x = \begin{cases} -1 & x < 0 \\ 0 & x = 0 \\ +1 & x > 0 \end{cases}$$


Matlab:

In []:

```
fourier(sign(t),omega)
```

The transform is:

$$\operatorname{sgn} x = u_0(t) - u_0(-t) = \frac{2}{j\omega}$$

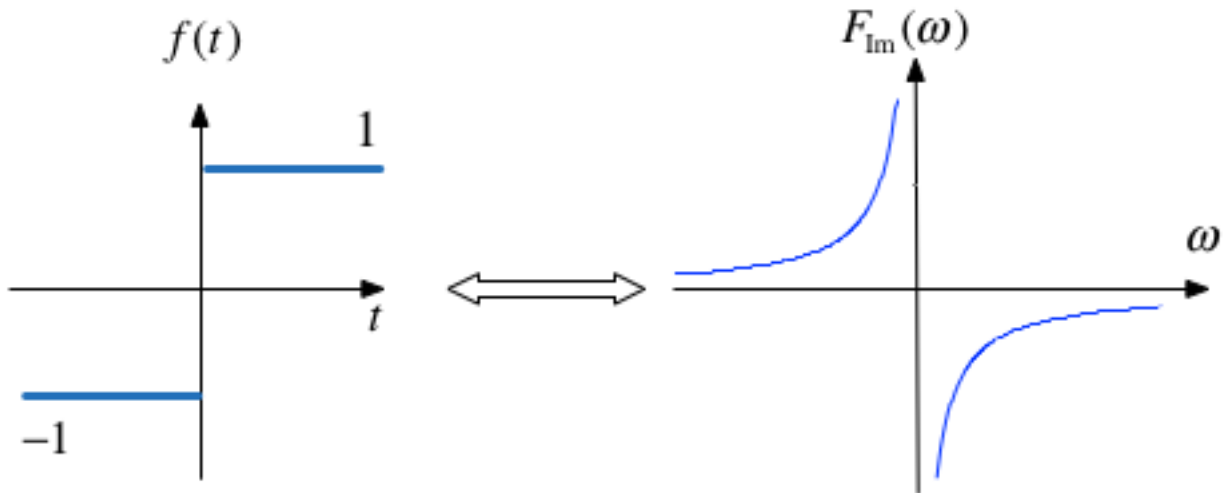

This function is often used to model a *voltage comparitor* in circuits.

Example 4: Unit Step


Use the signum function to show that

$$\mathcal{F} \{u_0(t)\} = \pi\delta(\omega) + \frac{1}{j\omega}$$

Clue

Define

$$\operatorname{sgn} t = 2u_0(t) - 1$$

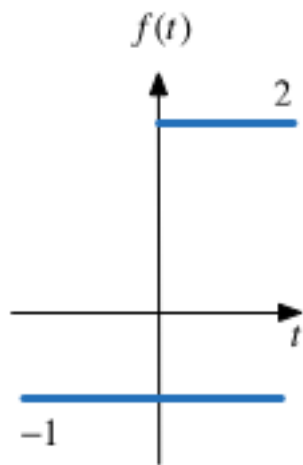

Does that help?

Proof

$$\operatorname{sgn} x = 2u_0(t) - 1$$

so

$$u_0(t) = \frac{1}{2} [1 + \operatorname{sgn} x]$$

From previous results $1 \Leftrightarrow 2\pi\delta(\omega)$ and $\operatorname{sgn} x = 2/(j\omega)$ so by linearity

$$u_0(t) \Leftrightarrow \pi\delta(\omega) + \frac{1}{j\omega}$$

QED

Matlab:

In []:


```
fourier(heaviside(t),omega)
```

Example 5

Use the results derived so far to show that

$$e^{j\omega_0 t} u_0(t) \Leftrightarrow \pi \delta(\omega - \omega_0) + \frac{1}{j(\omega - \omega_0)}$$

Hint: linearity plus frequency shift property.



Example 6

Use the results derived so far to show that

$$\sin \omega_0 t u_0(t) \Leftrightarrow \frac{\pi}{j2} [\delta(\omega - \omega_0) - \delta(\omega + \omega_0)] + \frac{\omega_0}{\omega_0^2 - \omega^2}$$

Hint: Euler's formula plus solution to example 2.

Important note: the equivalent example in Karris (Section 8.4.9 Eq. 8.75 pp 8-23—8-24) is wrong!

See worked solution in OneNote for corrected proof.



Example 7

Use the result of Example 3 to determine the Fourier transform of $\cos \omega_0 t \, u_0(t)$.



Answer

$$\cos \omega_0 t \, u_0(t) \Leftrightarrow \frac{\pi}{2} [\delta(\omega - \omega_0) + \delta(\omega + \omega_0)] + \frac{j\omega}{\omega_0^2 - \omega^2}$$

Derivation of the Fourier Transform from the Laplace Transform

If a signal is a function of time $f(t)$ which is zero for $t \leq 0$, we can obtain the Fourier transform from the Laplace transform by substituting s by $j\omega$.

Example 8: Single Pole Filter

Given that

$$\mathcal{L} \left\{ e^{-at} u_0(t) \right\} = \frac{1}{s + a}$$

Compute

$$\mathcal{F} \left\{ e^{-at} u_0(t) \right\}$$

Example 9: Complex Pole Pair cos term

Given that

$$\mathcal{L} \left\{ e^{-at} \cos \omega_0 t u_0(t) \right\} = \frac{s + a}{(s + a)^2 + \omega_0^2}$$

Compute

$$\mathcal{F} \left\{ e^{-at} \cos \omega_0 t u_0(t) \right\}$$



Fourier Transforms of Common Signals

We shall conclude this session by computing as many of the the Fourier transform of some common signals as we have time for.

- rectangular pulse
- triangular pulse
- periodic time function
- unit impulse train (model of regular sampling)