
Board file — our closest fit

From Fryer-5'7-Squash-Flyer-Twin.brd
The file: 5'7" × 18 3/4" × 2 5/16"

TOP VIEW



SIDE VIEW · TRUE HEIGHT

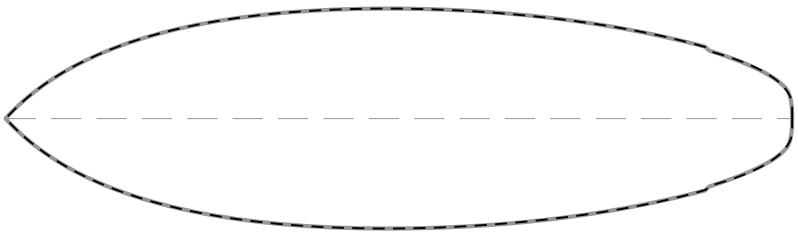

The file Our closest fit

HOW CLOSE

Outline: within 1/16", typically less than 1/16" — the widest gap 9/16" from the tail, where the file is wider than our fit
Rocker: within 1/8", typically 1/16" — the widest gap 21 7/16" from the nose
Thickness: within 1/16", typically less than 1/16" — the widest gap 21 7/16" from the nose
Bottom: within 1/16", typically less than 1/16" — the widest gap at the section 8 7/8" from the nose, 5 5/16" out from the stringer
Wing 1 — the file: 1/4" deep over a 3/8" run along the stringer, 7 7/16" off the tail, sharp corners. Ours: 1/4" deep over a 3/8" run, 7 3/8" off the tail, sharp corners.
The rocker and thickness gaps leave out the last 1" at each end, where a file may round its tips over; our side view ends square.

WIDTHS

	Nose 12"	Wide point	Wide point sits	Tail 12"	Tail end
The file	13 7/8"	18 3/4"	1" forward	14 3/8"	No flat end
Our fit	13 7/8"	18 3/4"	1" forward	14 7/16"	2 1/16"

ROCKER

	Nose tip	Nose 12"	Centre	Tail 12"	Tail tip
The file	3 13/16"	13/16"	0"	1"	2 1/2"
Our fit	3 13/16"	13/16"	0"	1"	2 7/16"

THICKNESS

	Nose tip	Nose 12"	Centre	Tail 12"	Tail tip
The file	1/4"	1 5/8"	2 5/16"	1 5/8"	3/8"
Our fit	1/4"	1 5/8"	2 5/16"	1 5/8"	7/16"

To match the file's rocker exactly, pick a blank on ROCKER and use Customize Rocker to bring it to these figures.
The file's rocker is the finished board's, along the stringer; ours is the board before contours. Under a concave the finished rocker reads more, by the concave's depth there; under a flat, vee or belly the two are the same line.
Our fit's concaves lift its stringer by up to 3/16" (at Centre): the figures above are the finished stringer's. The board is planed that much lower there, and ROCKER shows the rocker before contours once the board is open.

SUGGESTED BLANKS

One blank from each maker that this board fits in by your App Default Settings, its rocker closest to the file's. The figures are the board's rocker on that blank against the file's ROCKER figures: + is more rocker, - less; the gaps leave out the last inch at each end.
US Blanks 6'7"P: within 1/2", the widest gap 7 9/16" from the tail. Nose 0", nose 12" +5/16", tail 12" -1/4", tail -1/8".
Customize Rocker to +11/16"T: within 1/4".
Arctic Foam 6'4" SBM: within 5/16", the widest gap 10 3/4" from the tail. Nose +3/8", nose 12" +3/16", tail 12" -1/8", tail +1/8".
Customize Rocker to +1/4"T: within 1/4".
Marko Foam 6'4" TP: within 5/8", the widest gap 9 11/16" from the tail. Nose +11/16", nose 12" +1/8", tail 12" -7/16", tail 0".
Customize Rocker to -3/8"N35" +11/16"T: within 3/8".
Millennium Foam 6'6"DG: within 3/8", the widest gap 9 3/16" from the tail. Nose +1/8", nose 12" +1/8", tail 12" -3/16", tail 0".
Customize Rocker to +1/2"T: within 3/16".

OUR CLOSEST FIT

Length 5'7" · Width 18 3/4" · Offset +1"
Nose Angle 48.13° · Fullness 58.07% · Nose Rail 46.65%
Squash tail · Tail Block 2 1/16" · Tail Angle 89.98° · Fullness 69.46% · Tail Rail 4.57%
Rocker: nose 4" · nose 12" 15/16" · tail 12" 1 3/16" · tail 2 5/8"
Thickness: nose 1/4" · nose 12" 1 11/16" · centre 2 1/2" · tail 12" 1 5/8" · tail 7/16"
Bottom: Blended Nose Concave 1/16" · Deep Single Concave 3/16" · Double Concave Exit 1/8"

Rails aren't read from the file. Add these by hand once the board is open.


BOTTOM

CROSS-SECTIONS · HEIGHT ×4

8 7/8" FROM THE NOSE · 11 3/4" WIDE



32 1/8" FROM THE TAIL · 18 11/16" WIDE



10 9/16" FROM THE TAIL · 13 3/4" WIDE



	Nose	Centre	Tail
Read at	8 7/8" from the nose	32 1/8" from the tail	10 9/16" from the tail
The file	Single concave 1/8"	Single concave 3/16"	Double concave 1/8"
Our fit	Blended Nose Concave 1/16"	Deep Single Concave 3/16"	Double Concave Exit 1/8"
Start · Deepest At · End	2" · 12" · 36" from the nose	62" · 26 1/2" · 10 11/16" from the tail	48" · 10 11/16" · 4" from the tail
Across	Off Rail 1 5/8"	Off Rail 3/4"	Trough At 4 9/16" · Off Rail 0" · Off Stringer 3/4"

The bottom is read across each of the file's cross-sections, from the stringer to nine-tenths of the way out to the rail; the rail itself isn't read yet. A section that is all but flat reads as flat.

Read from 3 of the file's 4 cross-sections; the ones within 1" of a tip are left out.