



5kg/cm²

JIS B 2220-2012 (KS B 1056-2015)
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

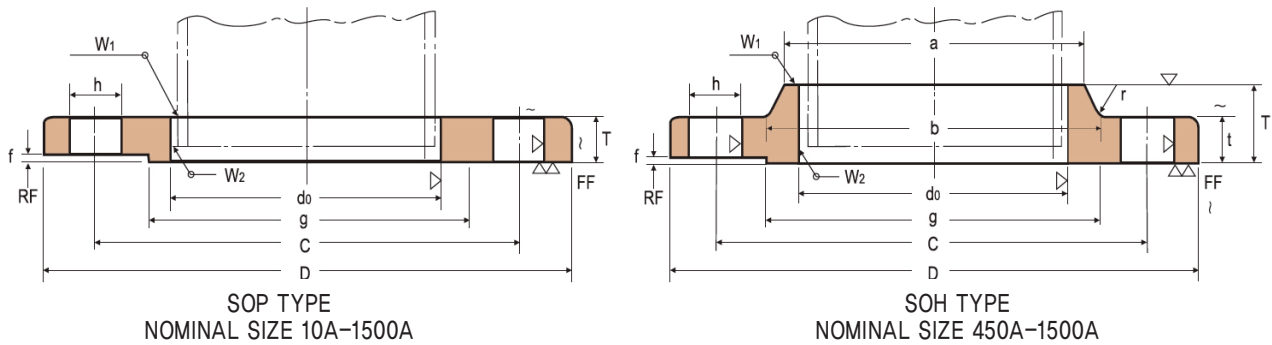

10kg/cm²

JIS B 2220-2012 (KS B 1056-2015)
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

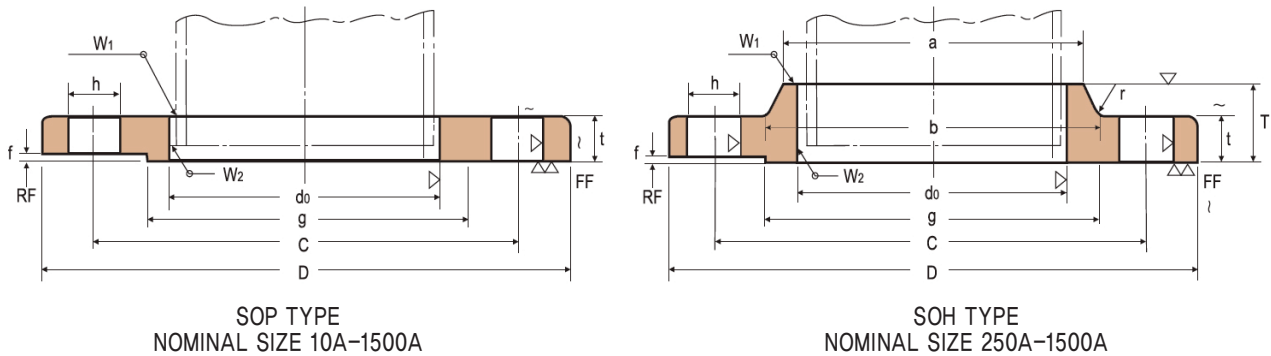

Unit : mm

Nominal Bore of Flange	Outside Diam.of applicable pipe	Inside Diam.of Flange do	Outside Diam.of Flange D	Sectional Dimensions of Flange							Dia. of Bolt			Nominal Bolt Size	Weight(kg)		
				t	T	Diam. of Hub		Radius	Raised Face f	Diam.of Raised Face g	Diam.of Bolt Circle c	Number of Bolt Holes	Holes Diam h		SOP	BL	SOH
				Except BL	SOH	a	b	r									
(10)A	17.3	17.8	75	9	—	—	—	—	1	39	55	4	12	M10	0.26	0.28	—
15A	21.7	22.2	80	9	—	—	—	—	1	44	60	4	12	M10	0.30	0.32	—
(20)A	27.2	27.7	85	10	—	—	—	—	1	49	65	4	12	M10	0.36	0.41	—
25A	34.0	34.5	95	10	—	—	—	—	1	59	75	4	12	M10	0.45	0.52	—
(32)A	42.7	43.2	115	12	—	—	—	—	2	70	90	4	15	M12	0.77	0.91	—
40A	48.6	49.1	120	12	—	—	—	—	2	75	95	4	15	M12	0.82	1.0	—
50A	60.5	61.1	130	14	—	—	—	—	2	85	105	4	15	M12	1.06	1.38	—
65A	76.3	77.1	155	14	—	—	—	—	2	110	130	4	15	M12	1.48	2.0	—
80A	89.1	90.0	180	14	—	—	—	—	2	121	145	4	19	M16	1.97	2.67	—
(90)A	101.6	102.6	190	14	—	—	—	—	2	131	155	4	19	M16	2.08	3.8	—
100A	114.3	115.4	200	16	—	—	—	—	2	141	165	8	19	M16	2.35	3.66	—
125A	139.8	141.2	235	16	—	—	—	—	2	176	200	8	19	M16	3.20	5.16	—
150A	165.2	166.6	265	18	—	—	—	—	2	206	230	8	19	M16	4.39	7.47	—
(175)A	190.7	192.1	300	18	—	—	—	—	2	232	260	8	23	M20	5.42	9.52	—
200A	216.3	218.0	320	20	—	—	—	—	2	252	280	8	23	M20	6.24	12.1	—
(225)A	241.8	243.7	345	20	—	—	—	—	2	277	305	12	23	M20	6.57	14.0	—
250A	267.4	269.5	385	22	—	—	—	—	2	317	345	12	23	M20	9.39	19.2	—
300A	318.5	321.0	430	22	—	—	—	—	3	360	390	12	23	M20	10.2	24.2	—
350A	355.6	358.1	480	24	—	—	—	—	3	403	435	12	25	M22	14.0	33.0	—
400A	406.4	409.0	540	24	—	—	—	—	3	463	495	16	25	M22	16.9	41.7	—
450A	457.2	460.0	605	24	40	495	500	5	3	523	555	16	25	M22	21.4	52.7	24.9
500A	508.0	511.0	655	24	40	546	552	5	3	573	605	20	25	M22	23.0	61.6	27.0
(550)A	558.8	562.0	720	26	42	597	603	5	3	630	665	20	27	M24	30.1	80.8	34.5
600A	609.6	613.0	770	26	44	648	654	5	3	680	715	20	27	M24	32.5	92.7	37.8
(650)A	660.4	664.0	825	26	48	702	708	5	3	735	770	24	27	M24	35.6	106	43.2
700A	711.2	715.0	875	26	48	751	758	5	3	785	820	24	27	M24	38.0	120	45.9
(750)A	762.0	766.0	945	28	52	802	810	5	3	840	880	24	33	M30	48.4	150	57.7
800A	812.8	817.0	995	28	52	854	862	5	3	890	930	24	33	M30	51.2	—	61.3
(850)A	863.6	868.0	1045	28	54	904	912	5	3	940	980	24	33	M30	53.9	—	65.3
900A	914.4	919.0	1095	30	56	956	964	5	3	990	1030	24	33	M30	60.7	—	73.1
1000A	1016.0	1021.0	1195	32	60	1058	1066	5	3	1090	1130	28	33	M30	70.5	—	84.8
(1100)A	1117.6	1122.0	1305	32	—	—	—	—	3	1200	1240	28	33	M30	—	—	—
1200A	1219.2	1224.0	1420	34	—	—	—	—	3	1305	1350	32	33	M30	—	—	—
*1350A	1371.6	1376.0	1575	34	—	—	—	—	3	1460	1505	32	33	M30	—	—	—
*1500A	1524.0	1529.0	1730	36	—	—	—	—	3	1615	1660	36	33	M30	—	—	—

Notes
(1) Adjustment shall be made according to the inside diameter of the steel pipes to be joined with.
(2) This may be rounded off with the dimension C as a radius.


Unit : mm

Nominal Bore of Flange	Outside Diam.of applicable pipe	Inside Diam.of Flange do	Outside Diam.of Flange D	Sectional Dimensions of Flange							Dia. of Bolt			Nominal Bolt Size	Weight(kg)		
				t	T	Diam. of Hub		Radius	Raised Face f	Diam.of Raised Face g	Diam.of Bolt Circle c	Number of Bolt Holes	Holes Diam h		SOP	BL	SOH
				Except BL	SOH	a	b	r									
10A	17.3	17.8	90	12	—	—	—	—	1	46	65	4	15	M12	0.51	0.53	—
15A	21.7	22.2	95	12	—	—	—	—	1	51	70	4	15	M12	0.56	0.60	—
20A	27.2	27.7	100	14	—	—	—	—	1	56	75	4	15	M12	0.72	0.79	—
25A	34.0	34.5	125	14	—	—	—	—	1	67	90	4	19	M16	1.12	1.22	—
32A	42.7	43.2	135	16	—	—	—	—	2	76	100	4	19	M16	1.47	1.66	—
40A	48.6	49.1	140	16	—	—	—	—	2	81	105	4	19	M16	1.55	1.79	—
50A	60.5	61.1	155	16	—	—	—	—	2	96	120	4	19	M16	1.86	2.23	—
65A	76.3	77.1	175	18	—	—	—	—	2	116	140	4	19	M16	2.58	3.24	—
80A	89.1	90.0	185	18	—	—	—	—	2	126	150	8	19	M16	2.58	3.48	—
(90)A	101.6	102.6	195	18	—	—	—	—	2	136	160	8	19	M16	2.73	3.90	—
100A	114.3	115.4	210	18	—	—	—	—	2	151	175	8	19	M16	3.10	4.57	—
125A	139.8	141.2	250	20	—	—	—	—	2	182	210	8	23	M20	4.73	7.18	—
150A	165.2	166.6	280	22	—	—	—	—	2	212	240	8	23	M20	6.30	10.1	—
(175)A	190.7	192.1	305	22	—	—	—	—	2	237	265	12	23	M20	6.75	11.8	—
200A	216.3	218.0	330	22	—	—	—	—	2	262	290	12	23	M20	7.46	13.9	—
(225)A	241.8	243.7	350	22	—	—	—	—	2	282	310	12	23	M20	7.40	15.8	—
250A	267.4	269.5	400	24	36	288	292	6	2	324	355	12	25	M22	11.8	22.6	12.7
300A	318.5	321.0	445	24	38	340	346	6	3	368	400	16	25	M22	12.6	27.8	13.8
350A	355.6	358.1	490	26	42	380	386	6	3	413	445	16	25	M22	16.3	36.9	18.2
400A	406.4	409.0	560	28	44	436	442	6	3	475	510	16	27	M24	23.2	52.1	25.8
450A	457.2	460.0	620	30	48	496	502	6	3	530	565	20	27	M24	29.3	68.4	33.4
500A	508.0	511.0	675	30	48	548	554	6	3	585	620	20	27	M24	33.3	81.6	38.0
(550)A	558.8	562.0	745	32	52	604	610	6	3	640	680	20	33	M30	42.9	112.0	49.4
600A	609.6	613.0	795	32	52	656	662	6	3	690	730	24	33	M30	45.4	134.0	52.6
(650)A	660.4	664.0	845	34	56	706	712	6	3	740	780	24	33	M30	51.8	161.0	60.2
700A	711.2	715.0	905	34	58	762	770	6	3	800	840	24	33	M30	59.0	196.0	70.2
(750)A	762.0	766.0	970	36	62	816	824	6	3	855	900	24	33	M30	72.8	248.0	86.5
800A	812.8	817.0	1020	36	64	868	876	6	3	905	950	28	33	M30	76.0	286.0	92.0
(850)A	863.6	868.0	1070	36	66	920	928	6	3	955	1000	28	33	M30	80.1	330.0	98.7
900A	914.4	919.0	1120	38	70	971	979	6	3	1005	1050	28	33	M30	88.9	377.0	110.0
1000A	1016.0	1021.0	1235	40	74	1073	1081	6	3	1110	1160	28	39	M36	109.0	512.0	133.0
*(1100)A	1117.6	1122.0	1345	42	95	1175	1185	8	3	1220	1270	28	39	M36	131.0	675.0	175.0
*1200A	1219.2	1224.0	1465	44	101	1278	1290	8	3	1325	1380	32	39	M36	163.0	854.0	215.0
*1350A	1371.6	1376.0	1630	48	110	1432	1450	8	3	1480	1540	36	45	M42	204.0	1180.0	274.0
*1500A	1524.0	1529.0	1795	50	123	1585	1605	8	3	1635	1700	40	45	M42	248.0	1590.0	340.0


Notes
(1) Adjustment shall be made according to the inside diameter of the steel pipes to be joined with.
(2) This may be rounded off with the dimension C as a radius.

16kg/cm²

JIS B 2220-2012 (KS B 1056-2015)
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

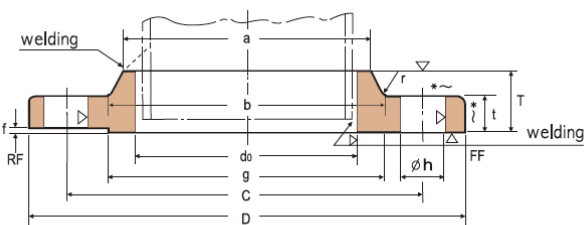

NOMINAL SIZE 10A-1500A

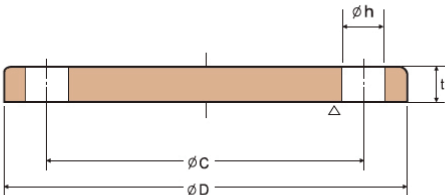

NOMINAL SIZE 10A-600A


Unit : mm

Nominal Bore of Flange	Outside Diam.of Steel Pipe	Inside Diam.of Flange do	Outside Diam.of Flange D	Sectional Dimensions of Flange							Dia. of Bolt			Nominal Bolt Size	Weight(kg)		
				t	T	Diam. of Hub		Radius r	Raised Face f	Diam.of Raised Face g	Diam.of Bolt Circle c	Number of Bolt Holes	Holes Diam h		SOP	BL	SOH
						a	b										
10A	17.3	17.8	90	12	16	26	28	4	1	46	65	4	15	M12	0.52	0.53	0.52
15A	21.7	22.2	95	12	16	30	32	4	1	51	70	4	15	M12	0.57	0.60	0.58
20A	27.2	27.7	100	14	20	38	42	4	1	56	75	4	15	M12	0.73	0.79	0.75
25A	34.0	34.5	125	14	20	46	50	4	1	67	90	4	19	M16	1.13	1.22	1.16
32A	42.7	43.2	135	16	22	56	60	5	2	76	100	4	19	M16	1.48	1.66	1.53
40A	48.6	49.1	140	16	24	62	66	5	2	81	105	4	19	M16	1.56	1.79	1.64
50A	60.5	61.1	155	16	24	76	80	5	2	96	120	8	19	M16	1.8	2.09	1.83
65A	76.3	77.1	175	18	26	94	98	5	2	116	140	8	19	M16	2.5	3.08	2.58
80A	89.1	90.0	200	20	28	108	112	6	2	132	160	8	23	M20	3.5	4.41	3.61
(90)A	101.6	102.6	210	20	30	120	124	6	2	145	170	8	23	M20	3.7	4.92	3.89
100A	114.3	115.4	225	22	34	134	138	6	2	160	185	8	23	M20	4.5	6.29	4.87
125A	139.8	141.2	270	22	34	164	170	6	2	195	225	8	25	M22	6.5	9.21	7.09
150A	165.2	166.6	305	24	38	196	202	6	2	230	260	12	25	M22	8.7	12.7	9.57
200A	216.3	218.0	350	26	40	244	252	6	2	275	305	12	25	M22	10.9	18.4	12.0
250A	267.4	269.5	430	28	44	304	312	6	2	345	380	12	27	M24	18.0	30.4	20.1
300A	318.5	321.0	480	30	48	354	364	8	3	395	430	16	27	M24	21.5	40.5	24.3
350A	355.6	358.1	540	34	52	398	408	8	3	440	480	16	33	M30x3	30.8	57.5	34.4
400A	406.4	409.0	605	38	60	446	456	10	3	495	540	16	33	M30x3	42.8	81.7	47.4
450A	457.2	460.0	675	40	64	504	514	10	3	560	605	20	33	M30x3	55.1	107.0	61.8
500A	508.0	511.0	730	42	68	558	568	10	3	615	660	20	33	M30x3	65.1	132.0	73.7
(550)A	558.8	562.0	795	44	70	612	622	10	3	670	720	20	39	M36x3	77.9	163.0	87.9
600A	609.6	613.0	845	46	74	666	676	10	3	720	770	24	39	M36x3	86.0	192.0	98.4
(650)A	660.4	664.0	895	48	77	704	726	10	5	770	820	24	39	M36x3	96.3	—	—
700A	711.2	715.0	960	50	80	754	776	10	5	820	875	24	42	M39x3	114.1	—	—
(750)A	762.0	766.0	1020	52	83	806	832	10	5	880	935	24	42	M39x3	132.7	—	—
800A	812.8	817.0	1085	54	86	865	885	10	5	930	990	24	48	M45x3	152.1	—	—
(850)A	863.6	868.0	1135	56	89	916	936	10	5	980	1040	24	48	M45x3	166.5	—	—
900A	914.4	919.0	1185	58	93	968	986	10	5	1030	1090	28	48	M45x3	178.1	—	—
1000A	1016.0	1021.0	1320	62	99	1070	1098	12	5	1140	1210	28	56	M52x3	235.3	—	—
1100A	1117.6	1123.0	1420	66	105	1180	1200	12	5	1240	1310	32	56	M52x3	267.9	—	—
1200A	1219.2	1225.0	1530	70	112	1282	1302	12	5	1350	1420	32	56	M52x3	321.1	—	—
1300A	1320.8	1326.0	1645	74	—	—	—	—	5	1450	1530	32	62	—	378.6	—	—
1350A	1371.6	1377.0	1700	76	—	—	—	—	5	1510	1590	32	62	—	410.0	—	—
1400A	1422.4	1417.0	1755	78	—	—	—	—	5	1560	1640	36	62	—	436.0	—	—
1500A	1524.0	1529.0	1865	80	—	—	—	—	5	1670	1750	36	62	—	496.4	—	—


1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다. 2. 플랜지의 개스킷 자리는 KS B 1519에 따른다.
3. 볼트 및 너트의 재료와 모양에 대해서는 KS B 1511의 부속서 B를 참조한다. 4. 무게 계산은 KS D 3695에 따른다.

20kg/cm²


JIS B 2220-2012(KSB 1506-2015)
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

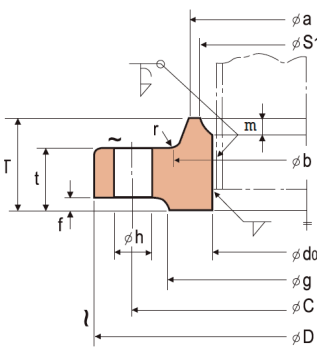

A TYPE : NOMINAL SIZE 10A-600A



B TYPE : NOMINAL SIZE 10A-50A

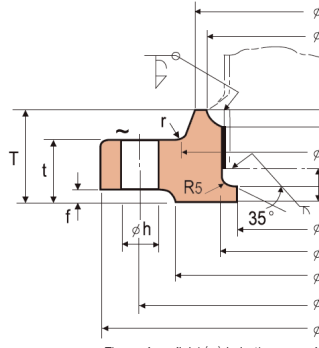


C TYPE : NOMINAL SIZE 65A-600A

Unit : mm


Nominal Bore of Flange	Outside Diam.of Steel Pipe	Inside Diam.of Flange do	Outside Diam.of Flange D	Sectional Dimensions of Flange								Dia. of Bolt				Reference					Weight(kg)		
				t	T	Diam. of Hub		Ra- dius r	f	g	d (B[고])	Diam of Bolt Circle c	Number of Bolt Holes	Holes Diam. h	Nominal Bolt Size	S1	m	S2	n	ℓ	SOP	BL	SOH
						a	b																
10A	17.3	17.8	90	14	20	30	32	4	1	46	—	65	4	15	M12	27	4	27	4	—	0.6	0.59	0.58
15A	21.7	22.2	95	14	20	34	36	4	1	51	—	70	4	15	M12	31	4	31	4	—	0.7	0.67	0.65
20A	27.2	27.7	100	16	22	40	42	4	1	56	—	75	4	15	M12	37	4	37	4	—	0.8	0.86	0.81
25A	34.0	34.5	125	16	24	48	50	4	1	67	—	90	4	19	M16	44	4	44	4.5	—	1.3	1.34	1.27
32A	42.7	43.2	135	18	26	56	60	5	2	76	—	100	4	19	M16	52	4	53	5	—	1.6	1.73	1.58
40A	48.6	49.1	140	18	26	62	66	5	2	81	—	105	4	19	M16	58	4	59	5.5	—	1.7	1.87	1.68
50A	60.5	61.1	155	18	26	76	80	5	2	96	—	120	8	19	M16	70	4	72	5.5	—	1.9	2.20	1.89
65A	76.3	77.1	175	20	30	100	104	5	2	116	65.9	140	8	19	M16	94	6	85	6	6	2.6	3.24	2.73
80A	89.1	90.0	200	22	34	113	117	6	2	132	78.1	160	8	23	M20	107	6	—	—	6	3.8	4.63	3.85
(90)A	101.6	102.6	210	24	36	126	130	6	2	145	90.2	170	8	23	M20	120	6	—	—	6	4.4	5.67	4.47
100A	114.3	115.4	225	24	36	138	142	6	2	160	102.3	185	8	23	M20	132	6	—	—	6	4.9	6.61	5.03
125A	139.8	141.2	270	26	40	166	172	6	2	195	126.6	225	8	25	M22	160	7	—	—	6	7.8	10.5	7.94
150A	165.2	166.6	305	28	42	196	202	6	2	230	151.0	260	12	25	M22	186	8	—	—	6	10.1	14.4	10.4
200A	216.3	218.0	350	30	46	244	252	6	2	275	199.9	305	12	25	M22	237	9	—	—	6	12.6	20.8	13.1
250A	267.4	269.5	430	34	52	304	312	6	2	345	248.8	380	12	27	M24	290	10	—	—	6	21.6	36.2	23.1
300A	318.5	321.0	480	36	56	354	364	8	3	395	297.9	430	16	27	M24	345	11	—	—	6	25.8	47.4	27.2
350A	355.6	358.1	540	40	62	398	408	8	3	440	333.4	480	16	33	M30x3	384	12	—	—	6	36.2	66.1	38.4
400A	406.4	409.0	605	46	70	446	456	10	3	495	381.0	540	16	33	M30x3	437	13	—	—	7	51.7	97.0	53.9
450A	457.2	460.0	675	48	78	504	514	10	3	560	431.8	605	20	33	M30x3	490	15	—	—	7	66.1	126.0	71.0
500A	508.0	511.0	730	50	84	558	568	10	3	615	482.6	660	20	33	M30x3	544	16	—	—	7	77.4	155.0	84.6
(550)A	558.8	562.0	795	52	90	612	622	10	3	670	533.4	720	20	39	M36x3	595	16	—	—	7	92.2	190.0	102.0
600A	609.6	613.0	845	54	96	666	676	10	3	720	584.2	770	24	39	M36x3	646	18	—	—	7	101.1	223.0	115.0
(650)A	660.4	664.0	945	60	—	—	—	—	5	790	—	850	24	48	M45x3	—	—	—	—	—	147.6	—	—
700A	711.2	715.0	995	64	—	—	—	—	5	840	—	900	24	48	M45x3	—	—	—	—	—	168.0	—	—
(750)A	762.0	766.0	1080	68	—	—	—	—	5	900	—	970	24	56	M52x3	—	—	—	—	—	212.7	—	—
800A	812.8	817.0	1140	72	—	—	—	—	5	960	—	1030	24	56	M52x3	—	—	—	—	—	248.5	—	—
(850)A	863.6	868.0	1200	74	—	—	—	—	5	1020	—	1090	24	56	M52x3	—	—	—	—	—	280.5	—	—
900A	914.6	919.0	1250	76	—	—	—	—	5	1070	—	1140	28	56	M52x3	—	—	—	—	—	296.9	—	—

30kg/cm²


JIS B 2220-2012(KSB 1506-2015)
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

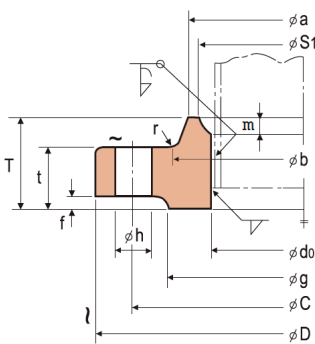

A TYPE : NOMINAL SIZE 10A-400A



B TYPE : NOMINAL SIZE 10A-50A

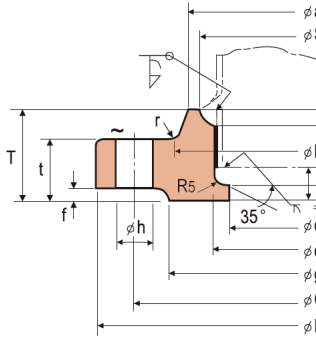

C TYPE : NOMINAL SIZE 65A-400A


Unit : mm

Nominal Bore of Flange	Outside Diameter of Steel Pipe	Inside Diameter of Flange do	Outside Diameter of Flange D	Sectional Dimensions of Flange								Dia. of Bolt				Reference					Approx Weight(kg)	
				t	T	Diam. of Hub		Rad-ius r	f	g	d (비고)	Diam of Bolt Circle c	Number of Bolt Holes	Hole Diam. h	Nominal Bolt Size	S1	m	S2	n	ℓ	SOH	BL
						a	b															
10A	17.3	17.8	110	16	24	30	34	4	1	52	-	75	4	19	M16	-	-	-	-	-	1.00	1.00
15A	21.7	22.2	115	18	26	36	40	5	1	55	-	80	4	19	M16	31	4	40	5	-	1.24	1.25
20A	27.2	27.7	120	18	28	42	46	5	1	60	-	85	4	19	M16	37	5	44	5	-	1.36	1.38
25A	34.0	34.5	130	20	30	50	54	5	1	70	-	95	4	19	M16	44	6	52	5	-	1.77	1.84
32A	42.7	43.2	140	22	32	60	64	6	2	80	-	105	4	19	M16	52	6	60	5	-	2.17	2.32
40A	48.6	49.1	160	22	34	66	70	6	2	90	-	120	4	23	M20	58	6	66	5	-	2.82	3.00
50A	60.5	61.1	165	22	36	82	86	6	2	105	-	130	8	19	M16	70	6.5	78	5	-	2.89	3.14
65A	76.3	77.1	200	26	40	102	106	8	2	130	65.9	160	8	23	M20	96	9.5	94	5	6	4.88	5.50
80A	89.1	90.0	210	28	44	115	121	8	2	140	78.1	170	8	23	M20	109	9.5	-	-	6	5.70	6.63
(90)A	101.6	102.6	230	30	46	128	134	8	2	150	90.2	185	8	25	M22	122	9.5	-	-	6	7.13	8.55
100A	114.3	115.4	240	32	48	141	147	8	2	160	102.3	195	8	25	M22	135	9.5	-	-	6	8.01	10.0
125A	139.8	141.2	275	36	54	166	172	8	2	195	126.6	230	8	25	M22	160	9.5	-	-	6	11.6	15.3
150A	165.2	166.6	325	38	58	196	204	8	2	235	151.0	275	12	27	M24	186	9.5	-	-	6	17.0	22.2
200A	216.3	218.0	370	42	64	248	256	8	2	280	199.9	320	12	27	M24	237	9.5	-	-	6	22.2	32.6
250A	267.4	269.5	450	48	72	306	314	10	2	345	248.8	390	12	33	M30x3	290	10	-	-	6	36.8	55.2
300A	318.5	321.0	515	52	78	360	370	10	3	405	297.9	450	16	33	M30x3	345	12	-	-	6	49.1	77.9
350A	355.6	358.1	560	54	84	402	412	12	3	450	333.4	495	16	33	M30x3	383	13	-	-	6	60.4	96.9
400A	406.4	409.0	630	60	92	456	468	15	3	510	381.0	560	16	39	M36x3	435	14	-	-	7	82.0	136


1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다. 2. 플랜지의 개스킷 자리는 KS B 1519에 따른다.
3. d 치수는 KS D 3562, KS D 3564 및 KS D 3570의 스케줄 40인 경우를 참고로 해서 표시한 것이다. 다만, 호칭 지름 450 이상인 것은 관의 안지름 두께를 12.7mm로 하였다.
4. 볼트 및 너트의 재료 및 모양에 대해서는 KS B 1511의 부속서 B를 참조한다. 5. 무게 계산은 KS D 3695에 따른다.

40kg/cm²


JIS B 2220-2012
SLIP-ON WELDING STAINLESS STEEL PIPE FLANGES

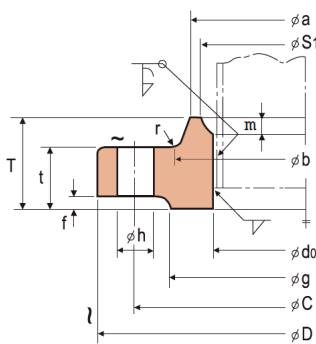

A TYPE : NOMINAL SIZE 10A-250A

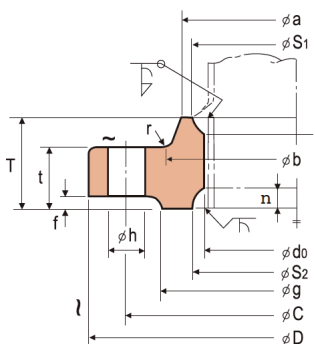

B TYPE : NOMINAL SIZE 10A-50A

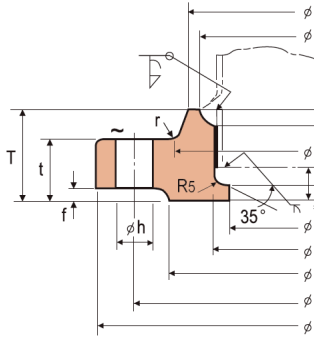

C TYPE : NOMINAL SIZE 65A-250A


Unit : mm

Nominal Bore of Flange	Outside Diameter of Steel Pipe	Inside Diameter of Flange do	Outside Diameter of Flange D	Sectional Dimensions of Flange								Dia. of Bolt				Reference					Approx Weight (kg)
				t	T	Diam. of Hub		Rad- ius r	f	g	d (B1G)	Diam of Bolt Circle c	Number of Bolt Holes	Hole Diam. h	Nominal Bolt Size	S1	m	S2	n	ℓ	
						a	b														
10A	17.3	17.8	110	18	26	34	38	5	1	52	－	75	4	19	M16	28.03	6	28.0	5	－	1.11
15A	21.7	22.2	115	20	30	39	43	5	1	55	－	80	4	19	M16	32.5	6	32.5	5	－	1.39
20A	27.2	27.7	120	20	30	45	49	5	1	60	－	85	4	19	M16	38.0	6	38.0	5	－	1.51
25A	34.0	34.5	130	22	32	55	59	5	1	70	－	95	4	19	M16	47.8	6	47.8	5	－	1.97
32A	42.7	43.2	140	24	35	64	68	6	2	80	－	105	4	19	M16	56.5	6	56.5	5	－	2.50
40A	48.6	49.1	160	24	35	70	74	6	2	90	－	120	4	23	M20	62.5	6	62.5	5	－	3.26
50A	60.5	61.1	165	26	38	86	90	6	2	105	－	130	8	19	M16	74.5	6	74.5	5.5	－	3.47
65A	76.3	77.1	200	30	44	106	110	8	2	130	62.3	160	8	23	M20	91.5	7	91.5	7	－	5.97
80A	89.1	90.3	210	32	46	118	124	8	2	140	73.9	170	8	23	M20	105.5	7.5	105.5	7	－	6.76
100A	114.3	115.4	250	36	52	145	151	8	2	165	97.1	205	8	25	M22	133.0	8.5	133.0	7	－	10.78
125A	139.8	141.4	300	40	58	182	188	8	2	200	120.8	250	8	27	M24	160.5	9.5	160.5	7	－	16.97
150A	165.2	167.0	355	44	64	200	208	8	2	240	143.2	295	12	33	M30	188.0	11	188.0	7	－	22.6
200A	216.3	218.2	405	50	72	255	263	8	2	290	190.9	345	12	33	M30	243.0	13	243.0	7	－	34.9
250A	267.4	269.5	475	56	80	310	318	10	2	355	237.2	410	12	33	M30	298.0	15	298.0	7	－	41.1

1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다. 2. 플랜지의 개스킷 자리는 KS B 1519에 따른다.
3. d 치수는 KS D 3562, KS D 3564 및 KS D 3570의 스케줄 40인 경우를 참고로 해서 표시한 것이다. 다만, 호칭 지름 450 이상인 것은 관의 안지름 두께를 12.7mm로 하였다.
4. 볼트 및 너트의 재료 및 모양에 대해서는 KS B 1511의 부속서 B를 참조한다. 5. 무게 계산은 KS D 3695에 따른다.


210kgf/cm²

JIS B 2291-1994
FLANGE FOR OIL PRESSURE

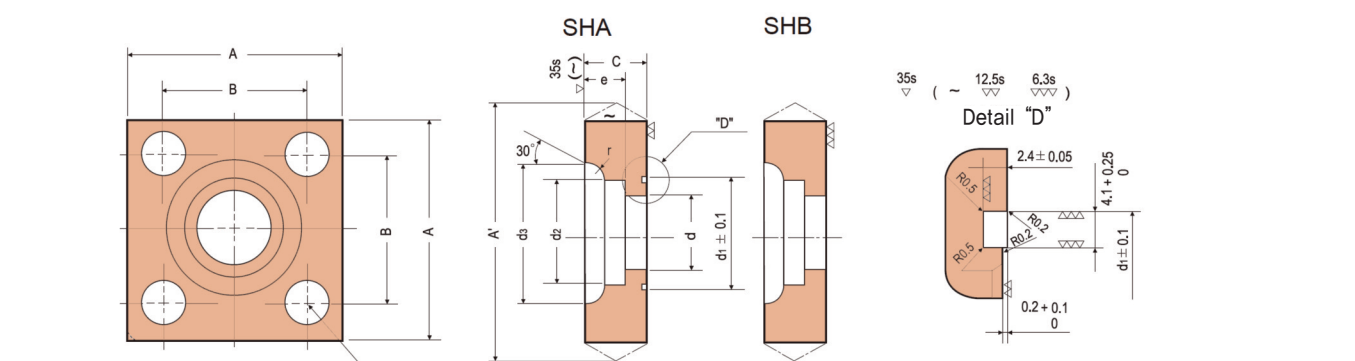

Unit : mm

Nominal Boree	A		A' (MAX)	B		C		d	d1	d2		e	d3	d4	f	r	Weight (kg)	REMARK		
								S/80										O-ring	BOLT	
15	63	±1	67	40	±0.2	22	0	14.3	30	±0.1	22.2	+0.2	11	32	11	3.5	5	0.6	G25	M10
20	68		72	45		22	−1	19.4	35		27.7	0	12	38	11	4.0	5	0.7	G30	M10
25	80	±1.2	85	53		28	0	25.0	40		34.5	+0.3	14	45	13	4.0	5	1.2	G35	M12
32	90		95	63		28	−1.5	32.9	45		43.2		16	56	13	6.0	5	1.5	G40	M12
40	100	±1.5	106	70	±0.4	36		38.4	55		49.1	0	18	63	18	7.0	5	2.4	G50	M16
50	112		118	80		36		0	49.5		65	61.1	20	75	18	7.0	5	2.8	G60	M16
65	140	±2	148	100		45	−2	62.3	80		77.1	+0.4	22	95	22	9.5	6	5.3	G75	M20
80	155		163	112		45		73.9	90		90.0	0	25	108	24	11.0	6	6.2	G85	M22

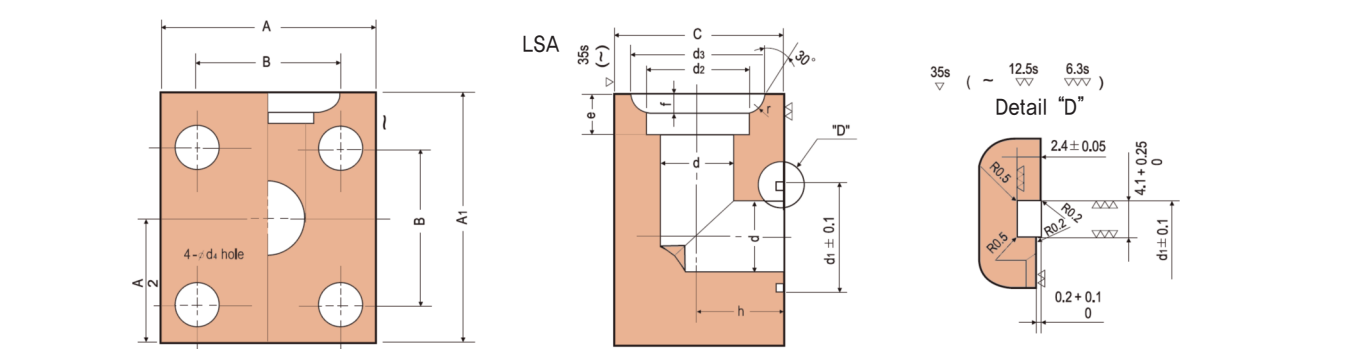


Unit : mm

Nominal Boree	A		A1' (MAX)		B		C		h	d	d1	d2		e	d3	d4	f	r	Weight (kg)	REMARK	
										S/80										O-ring	BOLT
15	54	±1	63	±1	36	±0.2	40	0	20	14.3	30	22.2	±0.2	11	32	11	3.5	5	1.0	G25	M10
20	58		70		40		45		22.5	19.4	35	27.7	0	12	38	11	4.0	5	1.3	G30	M10
25	68		82		48		50		25	25.0	40	34.5	+0.3	14	45	13	4.0	5	1.9	G35	M12
32	76	±1.2	92	±1.2	56		63		31.5	32.9	45	43.2		16	56	13	6.0	5	2.9	G40	M12
40	92		110		65	±0.4	71	-2	35.5	38.4	55	49.1	0	18	63	18	7.0	5	4.7	G50	M16
50	100	±1.5	125	±1.5	73		85		42.5	49.5	65	61.1	+0.4	20	75	18	7.0	5	6.8	G60	M16
65	128		150		92		106	0	53	62.3	80	77.1		22	95	22	9.0	6	12.8	G75	M20
80	140	±2	170	±2	103		118	59	73.9	90	90.0	0	25	108	24	11.0	6	17.0	G85	M22	


210kgf/cm²

JIS B 2291-1994
FLANGE FOR OIL PRESSURE

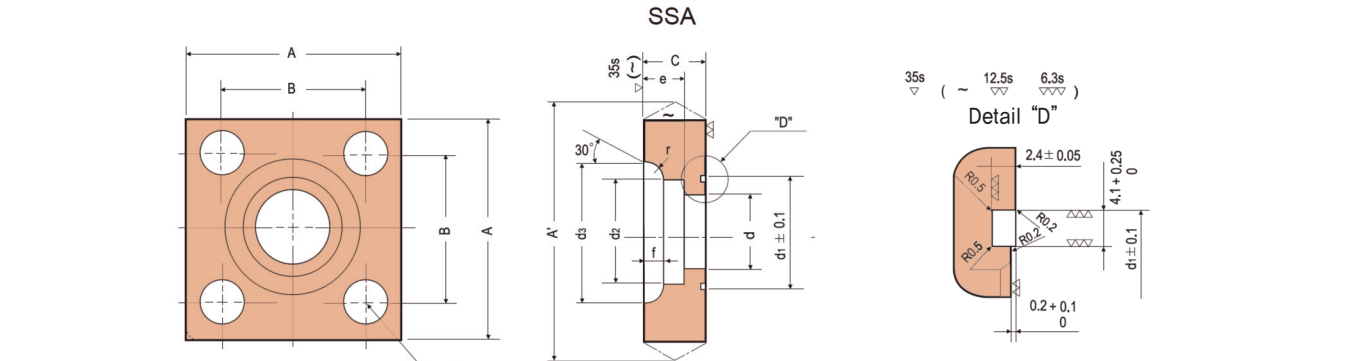

Unit : mm

Nominal Bore	A		A' (MAX)	B		C		d	d1		d2		e	d3	d4	f	r	Weight (kg)	REMARK	
								S/80											O-ring	BOLT
15	54	±1	58	36	±0.2	22	0	14.3	30	±0.1	22.2	+0.2	11	32	11	3.5	5	0.5	G25	M10
20	58		62	40		22	−1	19.4	35		27.7	0	12	38	11	4.0	5	0.6	G30	M10
25	68		73	48		28	0	25.0	40		34.5	±0.3	14	45	13	4.0	5	0.8	G35	M12
32	76	±1.2	81	56		28	−1.5	32.9	45		43.2		16	56	13	6.0	5	1.0	G40	M12
40	92		98	65	±0.4	36	0	38.4	55		49.1	0	18	63	18	7.0	5	1.9	G50	M16
50	100	±1.5	106	73		36		49.5	65		61.1	±0.4	20	75	18	7.0	5	2.0	G60	M16
65	128		136	92		45	62.3	80	77.1		22		95	22	9.5	6	4.1	G75	M20	
80	140	±2	148	103		45		73.9	90		90.0	0	25	108	24	11.0	6	4.7	G85	M22

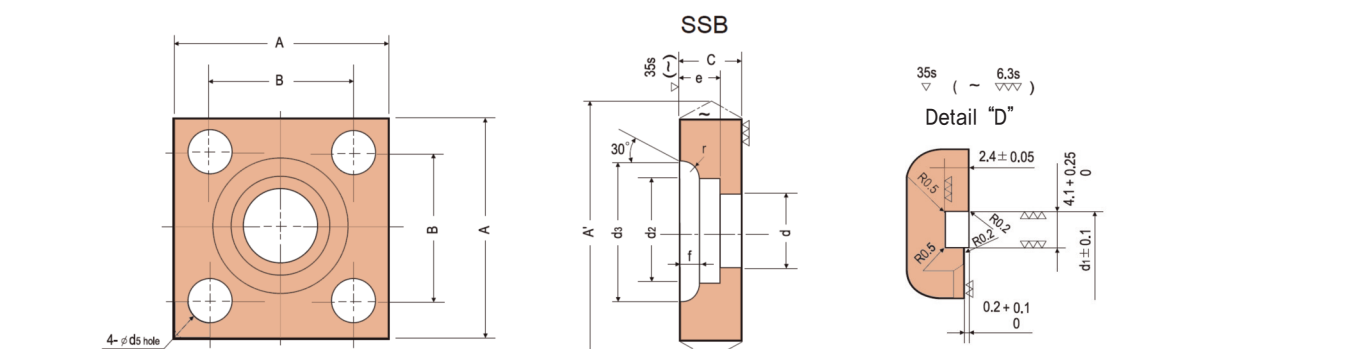


Unit : mm

Nominal Boree	A		A' (MAX)	B		C		d	d2		e	d3	d4	f	r	Weight (kg)
								S/80								
15	54	±1	58	36	±0.2	22	0	14.3	22.2	+0.2	11	32	M10	3.5	5	0.5
20	58		62	40		22	-1	19.4	27.7		0	12	38	M10	4.0	5
25	68		73	48		28	0	25.0	34.5	±0.3	14	45	M12	4.0	5	0.8
32	76	±1.2	81	56		28	-1.5	32.9	43.2		16	56	M12	6.0	5	1.0
40	92		98	65	36	±0.4	38.4	49.1	0		18	63	M16	7.0	5	1.9
50	100	±1.5	106	73	36		0	49.5	61.1	20	75	M16	7.0	5	2.0	
65	128		136	92	45		-20	62.3	77.1	+0.4	22	95	M20	9.5	6	4.1
80	140	±2	148	103	45		0	75.9	90.0	0	25	108	M22	11.0	6	4.7


280kgf/cm²

JIS F7806-1994
FLANGE FOR OIL PRESSURE

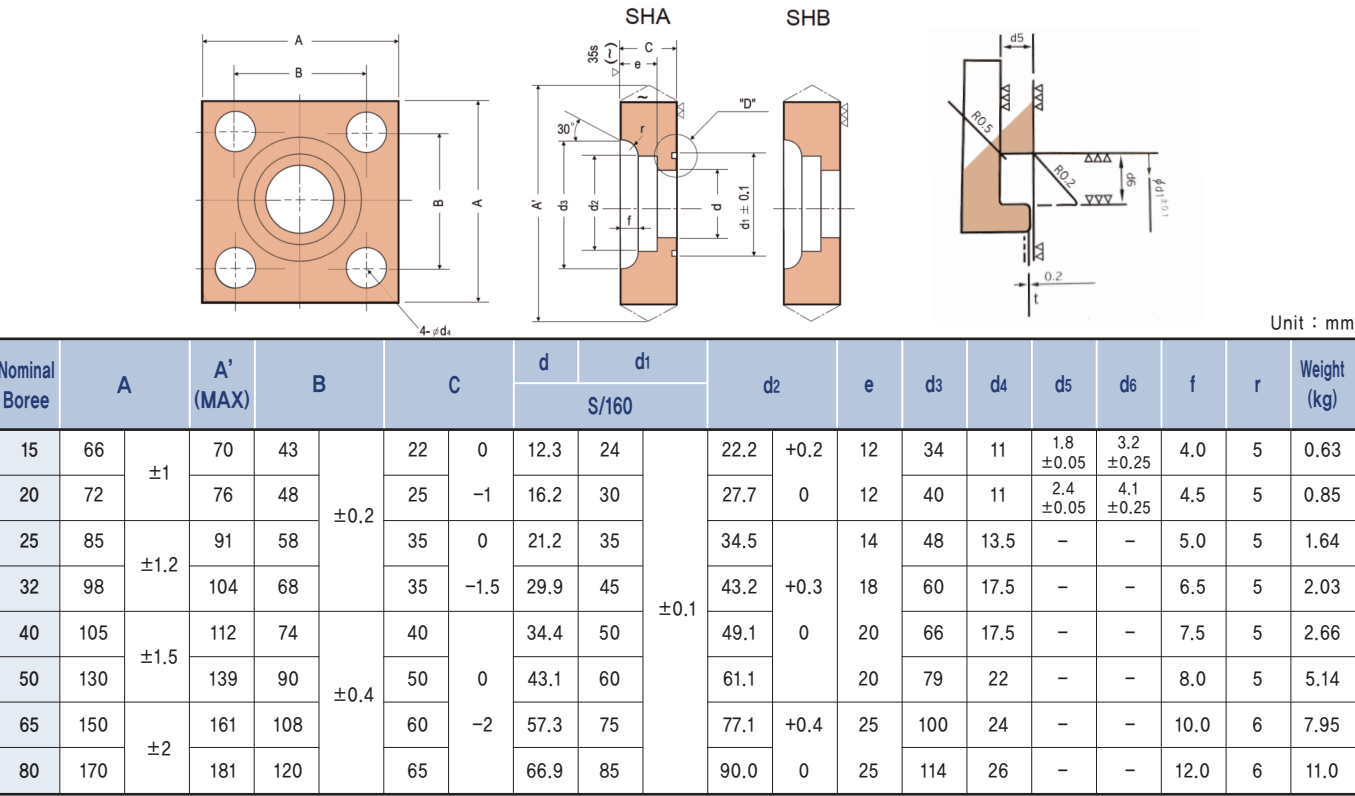

350kgf/cm²

FLANGE FOR OIL PRESSURE

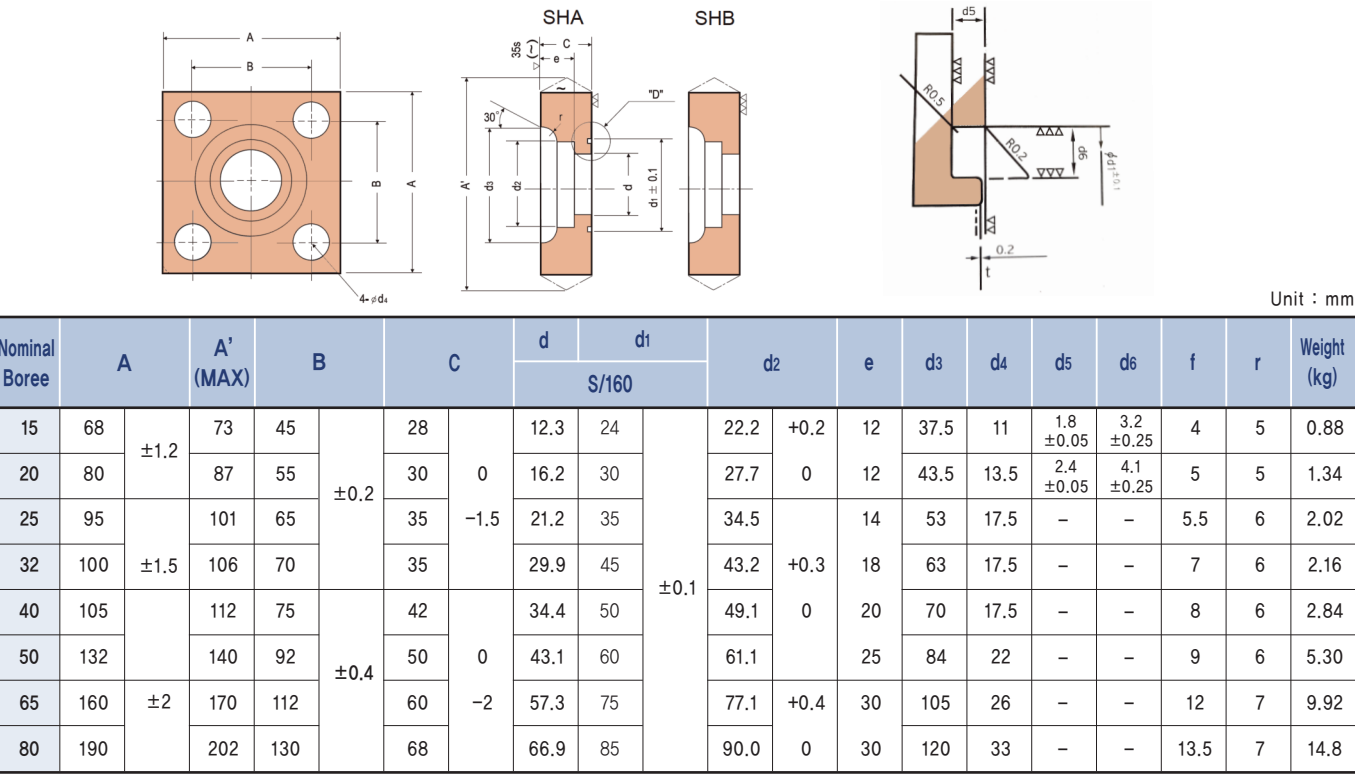


KS B 2332-2015

수도용 제수밸브용 플랜지
Sluice valves for water works flange

KS B 2333-2015

수도용 버터플라이 밸브용 플랜지
Butterfly valves for water works flange

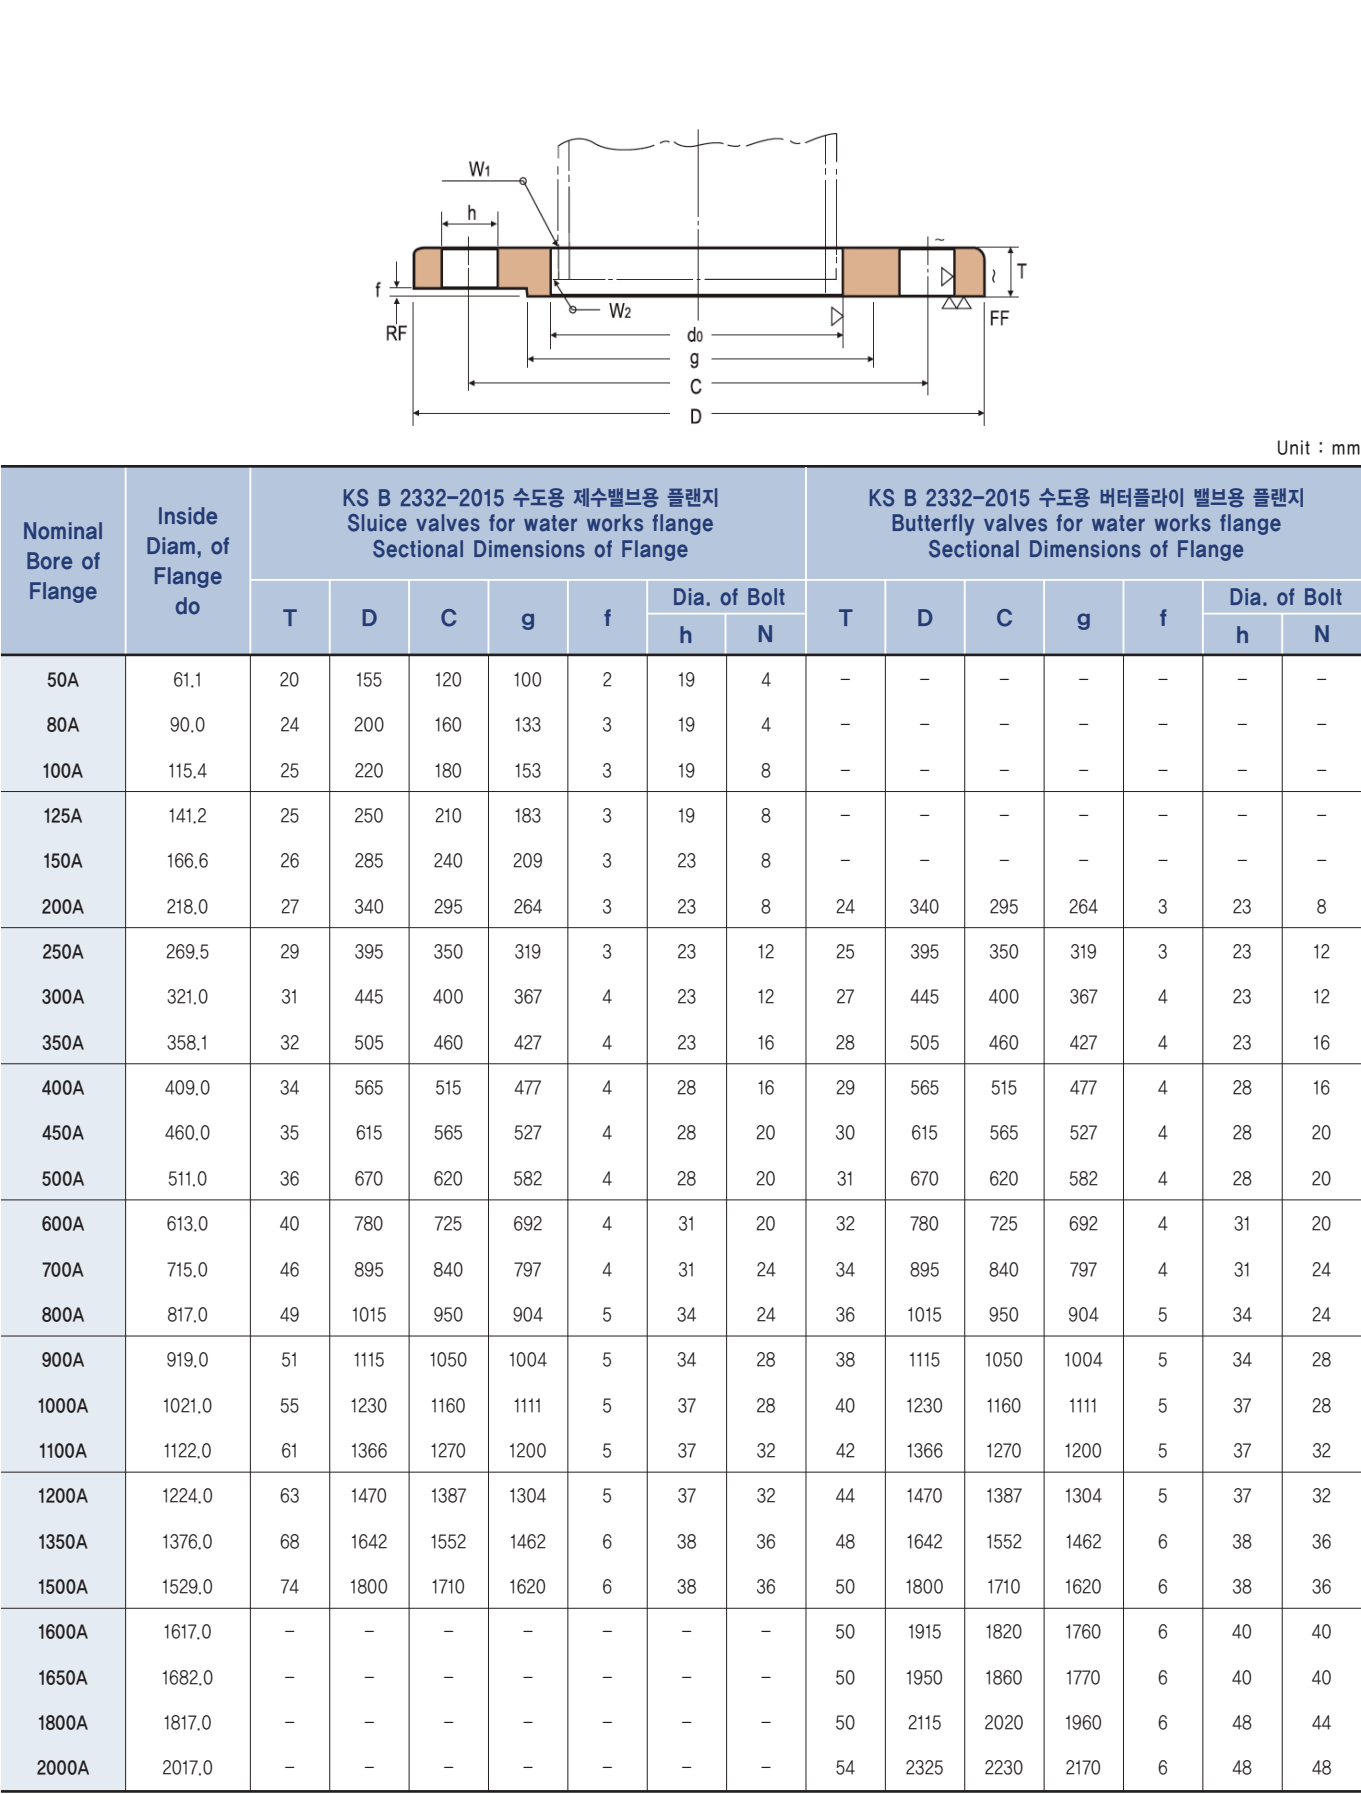

상수도용 도복장 강관 이형관용 KS D 3578-2014 플랜지
Fittings Coated Steel Pipe for Water Works

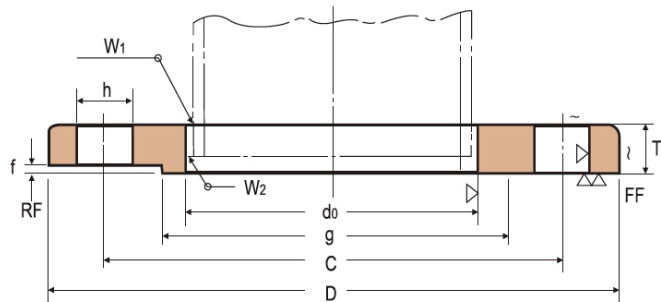


Table with 18 columns: Nominal Bore of Flange, Inside Diam. of Flange do, T, D, C, g, f, Dia. of Bolt h, N, Weight (kg), T, D, C, g, f, Dia. of Bolt h, N, Weight (kg). Rows include specifications for F12 KS D 3578 10kgf/cm² and F15 KS D 3578 16kgf/cm².

Table with 18 columns: Nominal Bore of Flange, Inside Diam. of Flange do, T, D, C, g, f, Bolt Hole h, N, Weight (kg), T, D, C, g, f, Bolt Hole h, N, Weight (kg). Rows include specifications for F20 KS D 3578 20kgf/cm² and F12 KS D 3578 10kgf/cm².


Table with 18 columns: Nominal Bore of Flange, Inside Diam. of Flange do, T, D, C, g, f, Bolt Hole h, N, Weight (kg), T, D, C, g, f, Bolt Hole h, N, Weight (kg). Rows include specifications for F15 KS D 3578 16kgf/cm² and F20 KS D 3578 20kgf/cm².

제수변

KS D 4308-2012

덕타일 주철 이형관

Ductile iron Fittings & Accessories

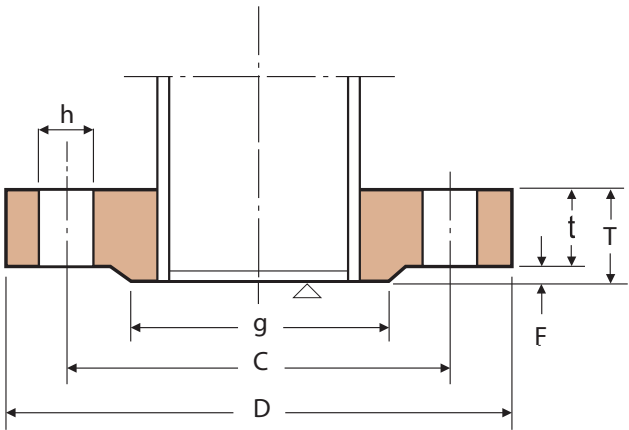

무게 : kg
Unit : mm

Nominal Bore of Flange	D	g	T	t	F	C	N	h	Bolt Size	Weight (kg)
80A	200	133	19.0	16.0	3	160	4	19	M16	3.0
100A	220	153	19.0	16.0	3	180	8	19	M16	3.3
125A	250	183	19.0	16.0	3	210	8	19	M16	4.0
150A	285	209	19.0	16.0	3	240	8	23	M20	4.9
200A	340	264	20.0	17.0	3	295	8	23	M20	6.8
250A	400	319	22.0	19.0	3	350	12	23	M20	9.6
300A	455	367	24.5	20.5	4	400	12	23	M20	12.8
350A	505	427	24.5	20.5	4	460	16	23	M20	14.1
400A	565	477	24.5	20.5	4	515	16	28	M24	16.3
450A	615	527	25.5	21.5	4	565	20	28	M24	18.1
500A	670	582	26.5	22.5	4	620	20	28	M24	21.8
600A	780	682	30.0	25.0	5	725	20	31	M27	30.8
700A	895	797	32.5	27.5	5	840	24	31	M27	40.5
800A	1015	904	35.0	30.0	5	950	24	34	M30	54.8
900A	1115	1004	37.5	32.5	5	1050	28	34	M30	64.3
1000A	1230	1111	40.0	35.0	5	1160	28	37	M33	81.4
1100A	1340	1218	42.5	37.5	5	1270	32	37	M33	105.0
1200A	1455	1328	45.0	40.0	5	1380	32	40	M36	120.9


KS B 6216-2013

증기용 및 가스용 스프링 안전밸브

JIS B 8210-1994

스프링 안전밸브의 설치 플랜지

전량정식 및 전량식 안전밸브 플랜지 (온양정식 및 온량식)

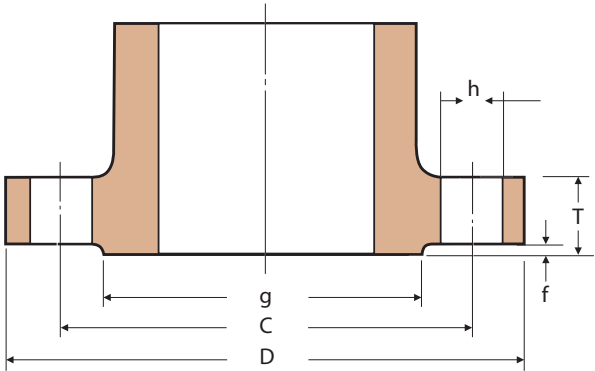


Unit : mm ():구구격

Pressure kgf/cm ²	Nominal Bore of Flange	Inside Diam. of Flange	Sectional Dimensions of Flange				Bolt Hole		
			T(구구격)	D(구구격)	g(구구격)	f(구구격)	C(구구격)	h(구구격)	N(구구격)
10K	20A	27.7	18 (22)	125 (125)	67 (70)	1 (1)	90 (90)	19 (19)	4 (4)
	25A	34.5	20 (22)	135 (130)	76 (75)	2 (1)	100 (95)	19 (19)	4 (4)
	32A	43.2	20 (24)	140 (140)	81 (85)	2 (2)	105 (105)	19 (19)	4 (4)
	40A	49.1	20 (24)	155 (155)	96 (100)	2 (2)	120 (120)	19 (19)	8 (8)
	50A	61.1	22 (26)	175 (165)	116 (110)	2 (2)	140 (130)	19 (19)	8 (8)
	65A	77.1	24 (28)	200 (200)	132 (135)	2 (2)	160 (160)	23 (23)	8 (8)
	80A	90.0	24 (30)	210 (210)	145 (145)	2 (2)	170 (170)	23 (23)	8 (8)
	90A	102.6	26	225	160	2	185	23	8
	100A	115.4	26 (32)	270 (245)	195 (180)	2 (2)	225 (205)	25 (23)	8 (8)
	125A	141.2	28 (34)	305 (280)	230 (205)	2 (2)	260 (235)	25 (25)	12 (12)
	150A	166.6	30 (36)	350 (325)	275 (250)	2 (2)	305 (280)	25 (25)	12 (12)
	200A	218.0	34 (38)	430 (385)	345 (300)	2 (2)	380 (335)	27 (27)	12 (12)
20K	20A	27.7	20 (22)	130 (130)	70 (70)	1 (1)	95 (95)	19 (19)	4 (4)
	25A	34.5	22 (22)	140 (135)	80 (75)	2 (1)	105 (100)	19 (19)	4 (4)
	32A	43.2	22 (24)	160 (160)	90 (90)	2 (2)	120 (120)	23 (23)	4 (4)
	40A	49.1	22 (24)	165 (165)	105 (105)	2 (2)	130 (130)	19 (19)	8 (8)
	50A	61.1	26 (26)	200 (185)	130 (115)	2 (2)	160 (145)	23 (23)	8 (8)
	65A	77.1	28 (30)	210 (210)	140 (140)	2 (2)	170 (170)	23 (23)	8 (8)
	80A	90.0	30 (32)	230 (230)	150 (150)	2 (2)	185 (185)	25 (25)	8 (8)
	90A	102.6	32	240	160	2	195	25	8
	100A	115.4	36 (36)	275 (265)	195 (185)	2 (2)	230 (220)	25 (25)	8 (8)
	125A	141.2	38 (38)	325 (290)	235 (210)	2 (2)	275 (245)	27 (25)	12 (12)
	150A	166.6	42 (42)	370 (350)	280 (260)	2 (2)	320 (300)	27 (27)	12 (12)
	200A	218.0	48 (46)	450 (410)	345 (310)	2 (2)	390 (350)	33 (33)	12 (12)
30K	20A	27.7	22 (24)	130 (130)	70 (70)	1 (1)	95 (95)	19 (19)	4 (4)
	25A	34.5	24 (24)	140 (135)	80 (75)	2 (1)	105 (100)	19 (19)	4 (4)
	32A	43.2	24 (26)	160 (160)	90 (90)	2 (2)	120 (120)	23 (23)	4 (4)
	40A	49.1	26 (28)	165 (165)	105 (105)	2 (2)	130 (130)	19 (19)	8 (8)
	50A	61.1	30 (30)	200 (185)	130 (115)	2 (2)	160 (145)	23 (23)	8 (8)
	65A	77.1	32 (34)	210 (210)	140 (140)	2 (2)	170 (170)	23 (23)	8 (8)
	80A	90.0	34 (36)	230 (230)	150 (150)	2 (2)	185 (185)	25 (25)	8 (8)
	90A	102.6	36	250	165	2	205	25	8
	100A	115.4	40 (40)	300 (285)	200 (190)	2 (2)	250 (235)	27 (27)	8 (8)
	125A	141.2	44 (44)	355 (315)	240 (215)	2 (2)	295 (265)	33 (27)	12 (12)
	150A	166.6	50 (48)	405 (375)	290 (265)	2 (2)	345 (315)	33 (33)	12 (12)
	200A	218.0	56 (54)	475 (435)	355 (315)	2 (2)	410 (370)	33 (36)	12 (12)

1K FLANGE FOR EXH. GAS PIPE(F-TYPE)

KS V 7815 JIS F 7805
SLIP-ON FLANGES

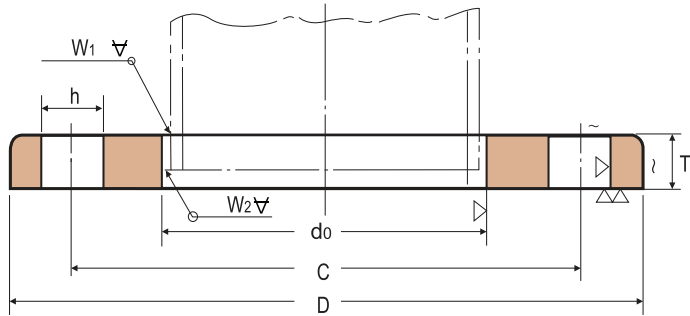


Unit : mm

N/D	PIPE	FLANGE			BOLT HOLE			BOLT (M)	W/T (kg)
	O/D	D	I/D(do)	T	C	N	H		
25A	34.0	95	34.5	10	75	4	12	M10	0.45
(32)A	42.7	115	43.2	12	90	4	15	M12	0.73
40A	48.6	120	49.1	12	95	4	15	M12	0.83
50A	60.5	130	61.1	14	105	4	15	M12	1.06
65A	76.3	155	77.1	14	130	4	15	M12	1.48
80A	89.1	180	90.0	14	145	4	19	M16	1.97
100A	114.3	200	115.4	16	165	8	19	M16	2.35
125A	139.8	235	141.2	16	200	8	19	M16	3.20
150A	165.2	265	166.6	16	230	8	19	M16	3.90
200A	216.3	320	218.0	16	280	8	23	M20	5.00
250A	267.4	385	269.5	16	345	12	23	M20	6.83
300A	318.5	430	321.0	16	390	12	23	M20	7.45
350A	355.6	480	358.1	16	435	12	25	M22	9.45
400A	406.4	540	409.0	16	495	16	25	M22	11.43
450A	457.2	605	460.0	16	555	16	25	M22	14.40
500A	508.0	655	511.0	16	605	16	25	M22	15.73
(550)A	555.8	660	562.0	16	620	16	23	M20	12.00
600A	609.6	710	613.0	16	670	16	23	M20	12.12
(650)A	660.4	760	664.0	16	720	16	23	M20	12.15
700A	711.2	815	715.0	16	775	16	23	M20	14.26
750A	762.0	865	766.0	16	825	20	23	M20	14.88
800A	812.8	915	817.0	16	875	20	23	M20	15.70
(850)A	863.6	965	868.0	16	925	20	23	M20	16.50
900A	914.4	1025	919.0	18	980	20	25	M22	21.48
(950)A	962.0	1075	967.0	18	1030	20	25	M22	21.97
1000A	1016.0	1125	1021.0	18	1080	20	25	M22	23.38
1050A	1062.0	1175	1067.0	18	1130	24	25	M22	25.21
1100A	1117.6	1225	1122.0	18	1180	24	25	M22	25.16
1150A	1162.0	1275	1167.0	18	1230	24	25	M22	26.64
1200A	1219.0	1325	1224.0	18	1280	24	25	M22	27.60
1250A	1262.0	1375	1267.0	18	1330	28	25	M22	29.72
1300A	1312.0	1425	1317.0	18	1380	28	25	M22	30.92
1350A	1371.6	1475	1376.0	18	1430	28	25	M22	32.38
1400A	1412.0	1525	1417.0	20	1480	28	25	M22	37.02
1450A	1462.0	1595	1467.0	20	1540	28	27	M24	45.81
1500A	1524.0	1645	1529.0	20	1590	28	27	M24	46.88
1600A	1612.0	1745	1617.0	20	1690	28	27	M24	50.54
1700A	1712.0	1845	1717.0	20	1790	28	27	M24	53.70
1800A	1812.0	1950	1817.0	20	1895	32	27	M24	58.90
1900A	1912.0	2050	1917.0	20	1995	32	27	M24	62.18
2000A	2012.0	2150	2017.0	20	2095	36	27	M24	65.10
2100A	2116.0	2250	2121.0	24	2195	36	27	M24	79.55
2200A	2216.0	2350	2221.0	24	2295	40	27	M24	82.94
2300A	2316.0	2450	2321.0	24	2395	40	27	M24	86.75
2400A	2416.0	2550	2421.0	24	2495	40	27	M24	89.71
2500A	2516.0	2650	2521.0	24	2595	48	27	M24	93.52
2600A	2616.0	2750	2621.0	24	2695	48	27	M24	97.34

2kg/cm²

KS B 1511-2012 JIS B 2220-2004
SLIP-ON FLANGES

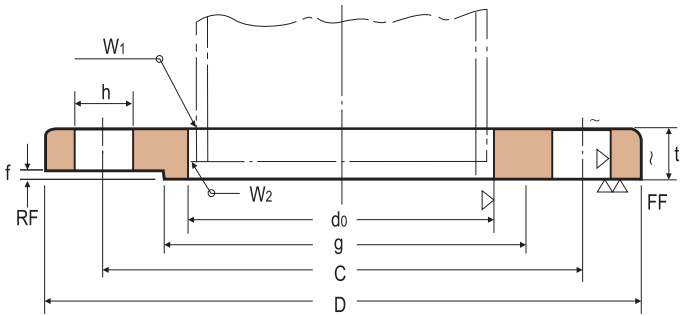


Unit : mm

Nominal Bore of Flange	Outside Diam.of Applicable Pipe	Inside Diam.of Flange do	Sectional Dimensions		Bolt Hole			Nominal Bolt Size
			t	D	C	h	N	
450A	457.2	460	22	605	555	23	16	M20
500A	508.0	511	22	655	605	23	20	M20
550A	558.8	562	24	720	665	25	20	M22
600A	609.6	613	24	770	715	25	20	M22
650A	660.4	664	24	825	770	25	24	M22
700A	711.2	715	24	875	820	25	24	M22
750A	762.0	766	24	945	880	27	24	M24
800A	812.8	817	24	995	930	27	24	M24
(850)A	863.6	868	24	1045	980	27	24	M24
900A	914.4	919	24	1095	1030	27	24	M24
1000A	1016.0	1021	26	1195	1130	27	28	M24
(1100)A	1117.6	1123	26	1305	1240	27	28	M24
1200A	1219.2	1224	26	1420	1350	27	32	M24
1350A	1371.6	1377	26	1575	1505	27	32	M24
1500A	1524.0	1529	28	1730	1660	27	36	M24

1. ()를 붙인 크기의 호칭인 것은 되도록 사용하지 않는 것이 좋다.
2. 최고 사용압력은 JIS B 2 201의 규정에 의한다.
3. 크기의 호칭 400 이하의 기본 수치는 JIS B 2211 5kg/cm2 철강제 관 플랜지의 기본치수를 적용한다.

5K SET-ON FLANGE

JIS B 2220-2004

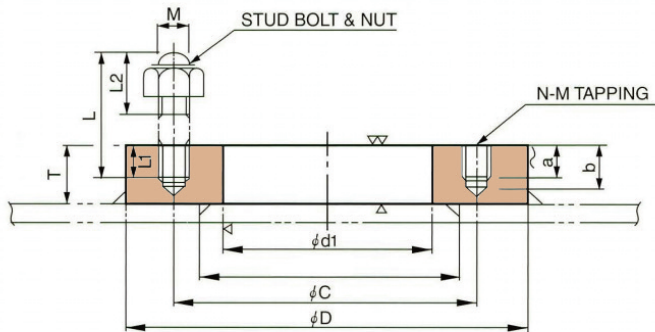


Unit : mm

Nominal Bore of Flange	Sectional Dimensions						STUD BOLT					Weight (kg)
	D	C	d1	T	a	b	N	M	L	L2	L1	
10A	75	55	17.8	16	10	12	4	M10	32	CONTINUOUS THREAD		0.47
15A	80	60	22.2	16	10	12	4	M10	32			0.53
20A	85	65	27.7	16	10	12	4	M10	32			0.60
25A	95	75	34.5	16	10	12	4	M10	32			0.72
32A	115	90	43.2	22	12	16	4	M12	40	22	12	1.45
40A	120	95	49.1	22	12	16	4	M12	40	22	12	1.54
50A	130	105	61.1	22	12	16	4	M12	45	22	12	1.70
65A	155	130	77.1	22	12	16	4	M12	45	22	12	2.36
80A	180	145	90.0	26	16	19	4	M16	50	28	16	3.74
100A	200	165	115.4	26	16	19	8	M16	55	28	16	4.01
125A	235	200	141.2	26	16	19	8	M16	55	28	16	5.38
150A	265	230	166.6	26	16	19	8	M16	55	28	16	6.52
200A	320	280	218.0	30	20	23	8	M20	65	36	20	9.66
250A	385	345	269.5	30	20	23	12	M20	65	36	20	13.25
300A	430	390	321.0	30	20	23	12	M20	65	36	20	14.41
350A	480	435	358.1	34	22	25	12	M22	75	40	22	20.55
400A	540	495	409.0	34	22	25	16	M22	75	40	22	24.85
450A	605	555	460.0	34	22	25	16	M22	75	40	22	31.15

10K SET-ON FLANGE

JIS B 2220-2004

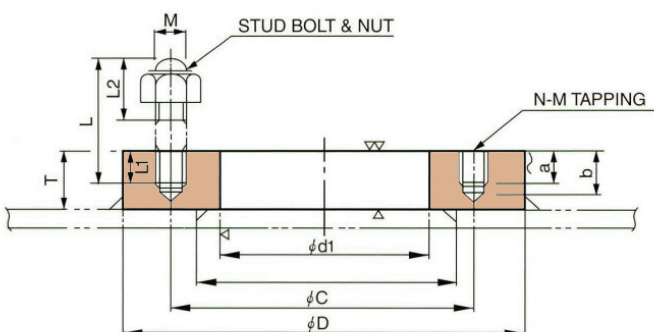


Unit : mm

Nominal Bore of Flange	Sectional Dimensions						STUD BOLT					Weight (kg)
	D	C	d1	T	a	b	N	M	L	L2	L1	
10A	90	65	17.8	22	12	16	4	M12	40	22	12	0.97
15A	95	70	22.2	22	12	16	4	M12	40	22	12	1.07
20A	100	75	27.7	22	12	16	4	M12	40	22	12	1.17
25A	125	90	34.5	26	16	19	4	M16	50	28	16	2.27
32A	135	100	43.2	26	16	19	4	M16	50	28	16	2.57
40A	140	105	49.1	26	16	19	4	M16	50	28	16	2.67
50A	155	120	61.1	26	16	19	4	M16	50	28	16	3.07
65A	175	140	77.1	26	16	19	4	M16	55	28	16	3.11
80A	185	150	90.0	26	16	19	8	M16	55	28	16	3.87
100A	210	175	115.4	26	16	19	8	M16	55	28	16	4.67
125A	250	210	141.2	30	20	23	8	M20	65	36	20	7.36
150A	280	240	166.6	30	20	23	8	M20	70	36	20	8.84
200A	330	290	218.0	30	20	23	12	M20	70	36	20	10.64
250A	400	355	269.5	34	22	25	12	M22	75	40	22	17.51
300A	445	400	321.0	34	22	25	16	M22	75	40	22	18.63

10kg/cm²


JIS B 2220-2012

WELDING NECK STAINLESS STEEL PIPE FLANGES

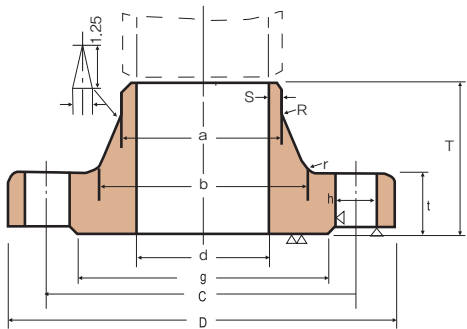

* The surface finish shown above is in the case of forging.
(▽marks:In other cases)

Reference:Beveling



When particularly necessary, customers can order another beveling form the above.


Unit : mm

Nominal Diam. of Flange	Outside Diam. of Steel Pipe	Outside Diam. of Flange D	Sectional Dimensions of Flange								Bolt Hole			Nominal Bolt Size	Approx Weight (kg)
			t	d	Diam of Hub		T	Radius r	f	g	Bolt Circle Bolt Holes	Number of Bolt Holes	Hole Dia. h		
					a	b									
10A	17.3	90	12	12.7	17.3	28	29	4	1	46	65	4	15	M12	0.55
15A	21.7	95	12	16.1	21.7	33	31	4	1	51	70	4	15	M12	0.63
20A	27.2	100	14	21.6	27.2	38	32	4	1	56	75	4	15	M12	0.80
25A	34.0	125	14	27.6	34.0	47	36	4	1	67	90	4	19	M16	1.26
32A	42.7	135	16	35.7	42.7	56	38	4	2	76	100	4	19	M16	1.66
40A	48.6	140	16	41.6	48.6	62	38	4	2	81	105	4	19	M16	1.79
50A	60.5	155	16	52.9	60.5	75	40	4	2	96	120	4	19	M16	2.23
65A	76.3	175	18	67.9	76.3	92	44	4	2	116	140	4	19	M16	3.24
80A	89.1	185	18	80.7	89.1	105	45	5	2	126	150	8	19	M16	3.48
(90)A	101.6	195	18	93.2	101.6	117	45	5	2	136	160	8	19	M16	3.90
100A	114.3	210	18	105.3	114.3	130	45	5	2	151	175	8	19	M16	4.57
125A	139.8	250	20	130.8	139.8	156	47	5	2	182	210	8	23	M20	7.18
150A	165.2	280	22	155.2	165.2	184	53	5	2	212	240	8	23	M20	10.1
(175)A	190.7	305	22	180.1	190.7	210	55	5	2	237	265	12	23	M20	11.8
200A	216.3	330	22	204.7	216.3	238	58	5	2	262	290	12	23	M20	13.9
(225)A	241.8	350	22	229.4	241.8	261	58	5	2	282	310	12	23	M20	15.8
250A	267.4	400	24	254.2	267.4	292	65	6	2	324	355	12	25	M22	22.6
300A	318.5	445	24	304.7	318.5	345	68	6	3	368	400	16	25	M22	27.8
350A	355.6	490	26	339.8	355.6	388	79	6	3	413	445	16	25	M22	36.9
400A	406.4	560	28	390.6	406.4	442	85	6	3	475	510	16	27	M24	52.1
450A	457.2	620	30	441.4	457.2	495	90	6	3	530	565	20	27	M24	68.4
500A	508.0	675	30	492.2	508.0	546	99	6	3	585	620	20	27	M24	81.6
550A	558.8	745	32	543.0	558.8	597	111	6	3	640	680	20	33	M30	112.0
600A	609.6	795	32	593.8	609.6	648	112	6	3	690	730	24	33	M30	134.0

20kg/cm²


JIS B 2220-2012

WELDING NECK STAINLESS STEEL PIPE FLANGES

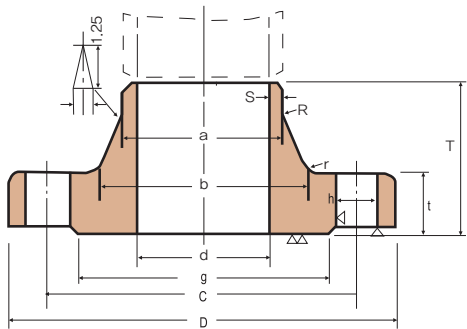

* The surface finish shown above is in the case of forging.
(▽marks:In other cases)

Reference:Beveling




When particularly necessary, customers can order another beveling form the above.

Unit : mm															
Nominal Diam. of Flange	Outside Diam. of Steel Pipe	Outside Diam. of Flange D	Sectional Dimensions of Flange								Bolt Hole			Nominal Bolt Size	Approx Weight (kg)
			t	d	Diam of Hub		T	Radius r	f	g	Bolt Circle Bolt Holes	Number of Bolt Holes	Hole Dia. h		
					a	b									
10A	17.3	90	14	12.7	17.3	32	33	4	1	46	65	4	15	M12	0.56
15A	21.7	95	14	16.1	21.7	36	34	4	1	51	70	4	15	M12	0.64
20A	27.2	100	16	21.4	27.2	42	36	4	1	56	75	4	15	M12	0.81
25A	34.0	125	16	27.2	34.0	50	38	4	1	67	90	4	19	M16	1.27
32A	42.7	135	18	35.5	42.7	60	41	5	2	76	100	4	19	M16	1.67
40A	48.6	140	18	41.2	48.6	66	41	5	2	81	105	4	19	M16	1.79
50A	60.5	155	18	52.7	60.5	80	42	5	2	96	120	8	19	M16	2.05
65A	76.3	175	20	65.9	76.3	104	48	5	2	116	140	8	19	M16	3.00
80A	89.1	200	22	78.1	89.1	117	51	6	2	132	160	8	23	M20	4.16
90A	101.6	210	24	90.2	101.6	130	54	6	2	145	170	8	23	M20	4.53
100A	114.3	225	24	102.3	114.3	142	58	6	2	160	185	8	23	M20	5.76
125A	139.8	270	26	126.6	139.8	172	64	6	2	195	225	8	25	M22	8.39
150A	165.2	305	28	151.0	165.2	202	73	6	2	230	260	12	25	M22	11.5
200A	216.3	350	30	199.9	216.3	252	77	6	2	275	305	12	25	M22	15.3
250A	267.4	430	34	248.8	267.4	312	87	6	2	345	380	12	27	M24	24.8
300A	318.5	480	36	297.9	318.5	364	94	8	3	395	430	16	27	M24	31.3
350A	355.6	540	40	333.4	355.6	408	110	8	3	440	480	16	33	M30x3	45.7
400A	406.4	605	46	381.0	406.4	456	123	10	3	495	540	16	33	M30x3	63.6
450A	457.2	675	48	431.8	457.2	514	134	10	3	560	605	20	33	M30x3	—
500A	508	730	50	482.6	508.0	568	136	10	3	615	660	20	33	M30x3	—
550A	558.8	795	52	533.4	558.8	622	143	10	3	670	720	20	39	M36x3	—
600A	609.6	845	54	584.2	609.6	676	149	10	3	720	770	24	39	M36x3	—


30kg/cm²

JIS B 2220-2012 (KS B 1506 - 2015)
WELDING NECK STAINLESS STELL PIPE FLANGES

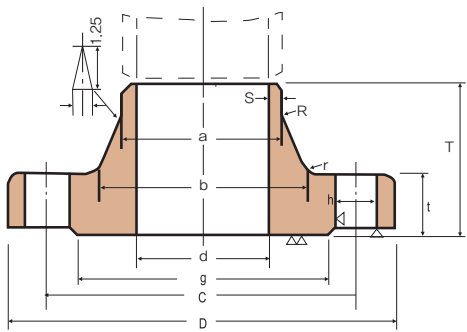

* The surface finish shown above is in the case of forging. (▽marks:In other cases)

Reference:Beveling



When particularly necessary, customers can order another beveling form the above.


Unit : mm

Nominal Diam. of Flange	Outside Diam. of Steel Pipe	Outside Diam. of Flange D	Sectional Dimensions of Flange										Bolt Hole			Nominal Bolt Size	Approx Weight (kg)
			t	Diam of Hub		b	S	T	R	Radius r	f	g	Bolt Circle Bolt Holes	Number of Bolt Holes	Hole Diameter h		
				d	a												
10A	—	110	16	12.7	—	—	—	—	—	—	1	52	75	4	19	M16	—
15A	21.7	115	18	16.1	21.7	40	3.1	45	20	6	1	55	80	4	19	M16	1.33
20A	27.2	120	18	21.4	27.2	44	3.2	45	20	6	1	60	85	4	19	M16	1.45
25A	34.0	130	20	27.2	34.0	52	3.8	48	20	6	1	70	95	4	19	M16	1.92
32A	42.7	140	22	35.5	42.7	62	4.0	52	30	6	2	80	105	4	19	M16	2.39
40A	48.6	160	22	41.2	48.6	70	4.2	54	30	6	2	90	120	4	23	M20	3.09
50A	60.5	165	22	52.7	60.5	84	4.4	57	30	8	2	105	130	8	19	M16	3.24
65A	76.3	200	26	65.9	76.3	104	5.8	69	30	8	2	130	160	8	23	M20	5.70
80A	89.1	210	28	78.1	89.1	118	6.1	73	30	8	2	140	170	8	23	M20	6.72
(90)A	101.6	230	30	90.2	101.6	130	6.4	74	30	8	2	150	185	8	25	M22	8.32
100A	114.3	240	32	102.3	114.3	142	6.8	76	30	8	2	160	195	8	25	M22	9.41
125A	139.8	275	36	126.6	139.8	172	7.5	86	50	10	2	195	230	8	25	M22	14.0
150A	165.2	325	38	151.0	165.2	202	8.1	95	50	10	2	235	275	12	27	M24	20.3
200A	216.3	370	42	199.9	216.3	254	9.4	102	50	10	2	280	320	12	27	M24	27.2
250A	267.4	450	48	248.8	267.4	312	10.6	118	50	12	2	345	390	12	33	M30x3	45.3
300A	318.5	515	52	297.9	318.5	366	11.8	127	50	15	3	405	450	16	33	M30x3	61.0
350A	355.6	560	54	333.4	355.6	406	12.7	134	80	15	3	450	495	16	33	M30x3	74.6
400A	406.4	630	60	381.0	406.4	462	14.6	149	80	20	3	510	560	16	39	M36x3	103.0

1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다.
2. 플랜지의 개스킷 자리는 KS B 1519에 따른다
3. d 및 S치수는 KS D 3562, KS D 3564 및 KS D 3570의 ANSI 스케줄 40인 경우를 참고로 해서 표시한 것으로서, 이 이외의 치수가 필요한 경우에는 인수, 인도 당사자 사이의 협정에 따른다.
4. 볼트 및 너트의 재료와 모양에 대해서는 KS B 1511의 부속서 B를 참조한다.
5. 무게 계산은 KS D 3695에 따른다.


40kg/cm²

JIS B 2220-2012
WELDING NECK STAINLESS STELL PIPE FLANGES

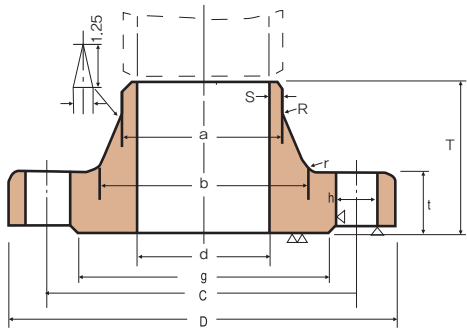

* The surface finish shown above is in the case of forging. (▽marks:In other cases)

Reference:Beveling



When particularly necessary, customers can order another beveling form the above.

Unit : mm


Nominal Diam. of Flange	Outside Diam. of Steel Pipe	Outside Diam. of Flange D	Sectional Dimensions of Flange										Bolt Hole			Nominal Bolt Size	Approx Weight (kg)
			t	d	Diam of Hub		S	T	R	Radius r	f	g	Bolt Circle Bolt Holes	Number of Bolt Holes	Hole Diameter h		
					d	a											
15A	21.7	115	20	16.1	21.7	40	3.1	48	20	6	1	55	80	4	19	M16	1.33
20A	27.2	120	20	21.4	27.2	45	3.2	48	20	6	1	60	85	4	19	M16	1.45
25A	34.0	130	22	27.2	34.0	54	3.8	53	20	6	1	70	95	4	19	M16	1.95
32A	42.7	140	24	35.5	42.7	62	4.0	54	30	6	2	80	105	4	19	M16	2.43
40A	48.6	160	24	41.2	48.6	72	4.2	59	30	6	2	90	120	4	23	M20	3.16
50A	60.5	165	26	52.7	60.5	87	4.4	65	30	8	2	105	130	8	19	M16	3.33
65A	76.3	200	30	65.9	76.3	108	5.8	78	30	8	2	130	160	8	23	M20	5.91
80A	89.1	210	32	78.1	89.1	119	6.1	78	30	8	2	140	170	8	23	M20	7.05
(90)A	101.6	230	34	90.2	101.6	130	6.4	79	30	8	2	150	185	8	25	M22	8.54
100A	114.3	250	36	102.3	114.3	146	6.8	85	30	8	2	165	205	8	25	M22	9.72
125A	139.8	300	40	126.6	139.8	186	7.5	108	50	10	2	200	250	8	27	M24	14.4
150A	165.2	355	44	151.0	165.2	215	8.1	117	50	10	2	240	295	12	33	M30x3	20.5
200A	216.3	405	50	199.9	216.3	270	9.4	130	50	10	2	290	345	12	33	M30x3	28.7
250A	267.4	475	56	248.8	267.4	333	10.6	152	50	12	2	355	410	12	33	M30x3	47.3
300A	318.5	540	60	297.9	318.5	380	11.8	153	50	15	3	410	470	16	39	M36x3	62.8
350A	355.6	585	64	333.4	355.6	425	12.7	168	80	15	3	455	515	16	39	M36x3	77.0
400A	406.4	645	70	381.0	406.4	466	14.6	168	80	20	3	515	570	16	39	M36x3	108.0

1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다.
2. 플랜지의 개스킷 자리는 KS B 1519에 따른다
3. d 및 S치수는 KS D 3562, KS D 3564 및 KS D 3570의 ANSI 스케줄 40인 경우를 참고로 해서 표시한 것으로서, 이 이외의 치수가 필요한 경우에는 인수, 인도 당사자 사이의 협정에 따른다.
4. 볼트 및 너트의 재료와 모양에 대해서는 KS B 1511의 부속서 B를 참조한다.
5. 무게 계산은 KS D 3695에 따른다.

63kg/cm²


JIS B 2220-2012

WELDING NECK STAINLESS STEEL PIPE FLANGES

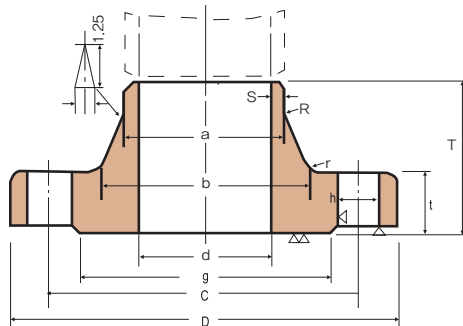

* The surface finish shown above is in the case of forging.
(▽marks: in other cases)

Reference: Beveling



When particularly necessary, customers can order another beveling form the above.

Unit : mm

Nominal Diam. of Flange	Outside Diam. of Steel Pipe	Outside Diam. of Flange D	Sectional Dimensions of Flange								Bolt Hole			Nominal Bolt Size	Approx Weight (kg)
			t	d	Diam of Hub		T	Radius r	f	g	Bolt Circle Bolt Holes	Number of Bolt Holes	Hole Dia. h		
					a	b									
15A	21.7	120	23	14.3	21.7	42	57	6	1	55	85	4	19	M16	1.33
20A	27.2	135	25	19.4	27.2	46	57	6	1	60	95	4	23	M20	1.47
25A	34.0	140	27	25.0	34.0	55	61	6	1	70	100	4	23	M20	1.95
32A	42.7	150	30	32.9	42.7	60	61	6	2	80	110	4	23	M20	2.43
40A	48.6	175	32	38.4	48.6	75	73	6	2	90	130	4	25	M23	3.16
50A	60.5	185	34	49.5	60.5	92	82	8	2	105	145	8	23	M20	3.33
65A	76.3	220	38	62.3	76.3	118	101	8	2	130	175	8	25	M22	5.91
80A	89.1	230	40	73.9	89.1	130	103	8	2	140	185	8	25	M22	7.05
(90)A	101.6	255	42	85.4	101.6	140	103	8	2	150	205	8	27	M24	8.54
100A	114.3	270	44	97.1	114.3	154	107	8	2	165	220	8	27	M24	9.72
125A	139.8	325	50	120.8	139.8	190	127	10	2	200	265	8	33	M30x3	14.4
150A	165.2	365	54	143.2	165.2	230	152	10	2	240	305	12	33	M30x3	20.6
200A	216.3	425	60	190.9	216.3	280	159	10	2	290	360	12	33	M30x3	28.7
250A	267.4	500	68	237.2	267.4	346	189	12	2	355	430	12	39	M36x3	47.3
300A	318.5	560	77	283.7	318.5	395	199	15	3	410	485	16	39	M36x3	62.8
350A	355.6	615	81	317.6	355.6	429	202	15	3	455	530	16	45	M42x3	77.0
400A	406.4	680	89	363.6	406.4	479	212	20	3	515	590	16	45	M42x3	108.0

1. ()를 붙인 호칭 지름은 가능한 한 사용하지 않는다. 7
2. 플랜지의 개스킷 자리는 KS B 1519에 따른다
3. d 및 S치수는 KS D 3562, KS D 3564 및 KS D 3570의 ANSI 스케줄 40인 경우를 참고로 해서 표시한 것으로서, 이 이외의 치수가 필요한 경우에는 인수, 인도 당사자 사이의 협정에 따른다.
4. 볼트 및 너트의 재료와 모양에 대해서는 KS B 1511의 부속서 B를 참조한다.
5. 무게 계산은 KS D 3695에 따른다.