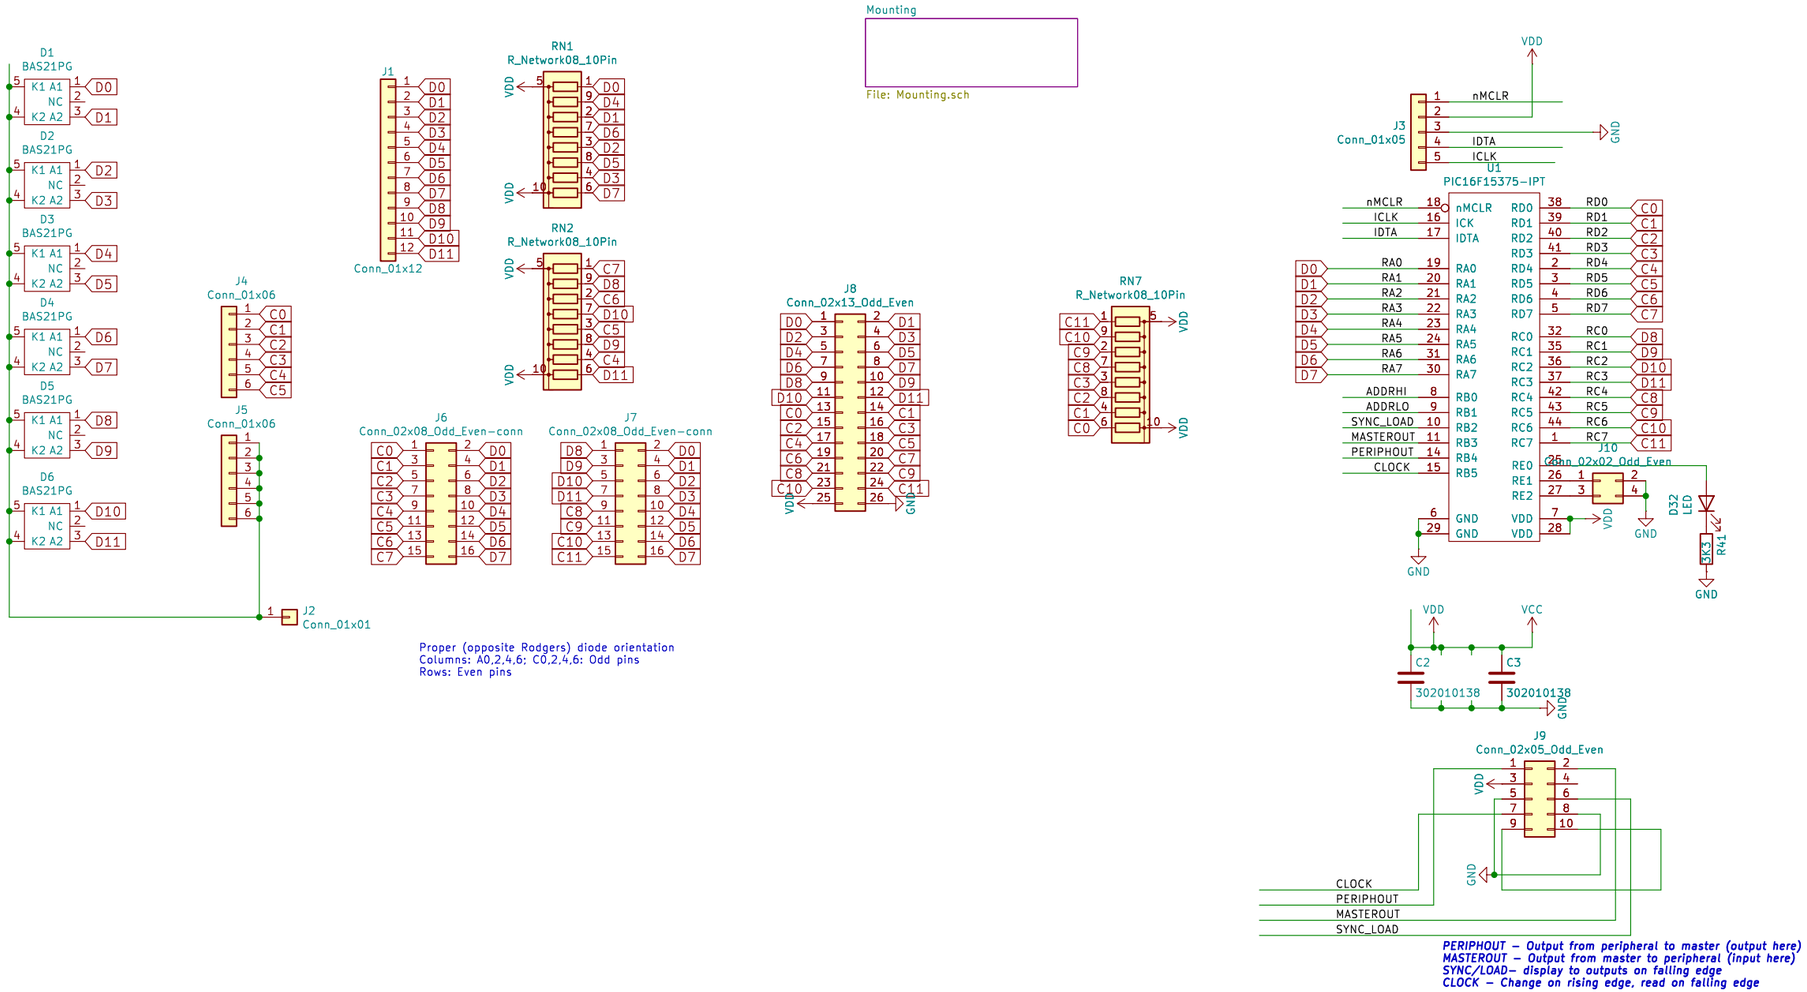

Proper (opposite Rodgers) diode orientation
Columns: A0,2,4,6; C0,2,4,6: Odd pins
Rows: Even pins

PERIPHOUT – Output from peripheral to master (output here)
MASTEROUT – Output from master to peripheral (input here)
SYNC/LOAD– display to outputs on falling edge
CLOCK – Change on rising edge, read on falling edge

Sheet: /
File: MatrixMakerPeterson.sch

Title:

Size: B	Date:	Rev:
KiCad E.D.A. 9.0.3		Id: 1/2