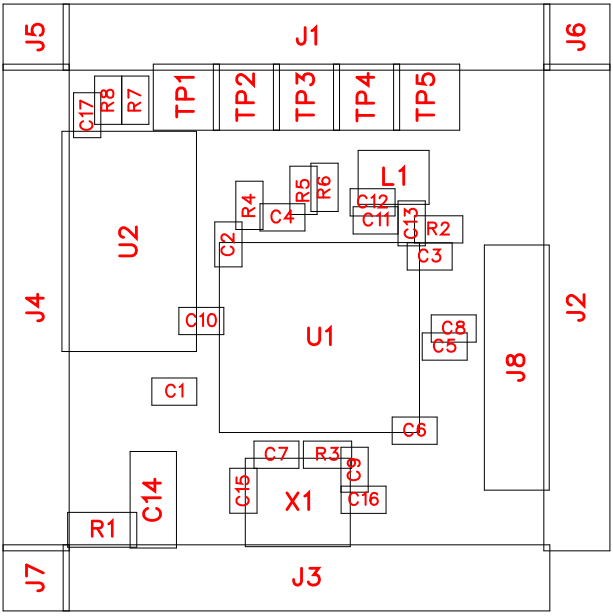

J5
J1
J6
TP1
TP2
TP3
TP4
TP5
C17
R8
R7
U2
L1
R4
R5
R6
C12
C11
C13
R2
C4
C2
C3
J4
C10
U1
C8
C5
J2
J8
C1
C6
C7
R3
C9
C15
X1
C16
C14
R1
J7
J3

No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	LCSC Part Name
1	10	100n	C1,C2,C3,C4,C5,C6,C7,C8,C9,C10	C0402	100n	GRM155R71E104KE14D	muRata(村田)	C77014	LCSC	100nF ±10% 25V
2	3	4.7u	C11,C12,C13	C0402	4.7u	GRM155R60J475ME47D	muRata(村田)	C82453	LCSC	4.7uF ±20% 6.3V
3	1	10u	C14	C0805	10u	GRM21BR61C106KE15L	muRata(村田)	C77075	LCSC	10uF ±10% 16V
4	2	15p	C15,C16	C0402	15p	GRM1555C1H150JA01D	muRata(村田)	C76950	LCSC	15pF ±5% 50V
5	1	100n (RP2350A ONLY / DNP RP2354A)	C17	C0402	100nF	GRM155R71E104KE14D	muRata(村田)	C77014	LCSC	100nF ±10% 25V
6	1	N 1-8	J1	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		Header2.54mm 1*8P.1	LCSC	
7	1	E 1-8	J2	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		Header2.54mm 1*8P.1	LCSC	
8	1	S 1-8	J3	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		Header2.54mm 1*8P.1	LCSC	
9	1	W 1-8	J4	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		Header2.54mm 1*8P.1	LCSC	
10	1	K-NW	J5	CraftVia-Core-S-KEY-TH_1P-P2.54-D1.00-P1.80		2.54-1*1P针	BOOMELE(博穆精密)	Header-Male-2.54_1x1.1	LCSC	
11	1	K-NE	J6	CraftVia-Core-S-KEY-TH_1P-P2.54-D1.00-P1.80		2.54-1*1P针	BOOMELE(博穆精密)	Header-Male-2.54_1x1.1	LCSC	
12	1	K-SW	J7	CraftVia-Core-S-KEY-TH_1P-P2.54-D1.00-P1.80		2.54-1*1P针	BOOMELE(博穆精密)	Header-Male-2.54_1x1.1	LCSC	
13	1	AUX GPIO20-23 / 2.54mm PTH	J8	HDR-TH_HDR-M_2.54_1X4P		HDR-M_2.54_1x4P		C9900236824	LCSC	HDR-M_2.54_1x4P
14	1	AOTA-B201610S3R3-101-T	L1	IND-SMD_L2.0-W1.6_AOTA-B201610S3R3-101-T	3.3uH	AOTA-B201610S3R3-101-T	ABRACON	C42411119	LCSC	3.3uH 2.4A
15	1	0R / FB INPUT FILTER	R1	R0603	0R	0603WAF0000T5E	UNI-ROYAL(厚声)	0603WAF0000T5E.1	LCSC	
16	1	33	R2	R0402	33	RC0402FR-0733RL	YAGEO(国巨)	C138002	LCSC	厚膜电阻 33Ω ±1% 62.5mW
17	2	1k	R3,R4	R0402	1k	RC0402FR-071KL	YAGEO(国巨)	C106235	LCSC	厚膜电阻 1kΩ ±1% 62.5mW

18	2	27	R5,R6	R0402	27	RC0402FR-0727RL	YAGEO(国巨)	C138021	LCSC	厚膜电阻 27Ω ±1% 62.5mW
19	1	0R (RP2350A ONLY / DNP RP2354A)	R7	R0402	0Ω	RC0402JR-070RL	YAGEO(国巨)	C60485	LCSC	厚膜电阻 0Ω ±5% 62.5mW
20	1	10k (RP2350A ONLY / DNP RP2354A)	R8	R0402	10kΩ	RC0402FR-0710KL	YAGEO(国巨)	C60490	LCSC	厚膜电阻 10kΩ ±1% 62.5mW
21	1	RP2354A	U1	QFN-60_L7.0-W7.0-P0.40-TL-EP3.4	RP2354A	RP2354A	Raspberry Pi(树莓派)	C41378174	LCSC	SC1511(13)-A4
22	1	W25Q128JVSIQ (RP2350A ONLY / DNP FOR RP2354A)	U2	SOIC-8_L5.3-W5.3-P1.27-LS8.0-BL		W25Q128JVSIQ	Winbond(华邦)	C97521	LCSC	编带 支持双路/四路SPI接口的3V、128 Mbit 串行闪存
23	1	12MHz	X1	CRYSTAL-SMD_4P-L3.2-W2.5-BL	12MHz	ABM8-272-T3	ABRACON	C20625731	LCSC	12MHz ±30ppm 10pF

Description	Mounting Type
Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:25V Temperature Coefficient:X7R	
Capacitance:4.7uF Tolerance:±20% Tolerance:±20% Voltage Rating:6.3V Temperature Coefficient:X5R	
Capacitance: Tolerance:±10% Tolerance:±10% Voltage Rated: Temperature Coefficient:	
Capacitance:15pF Tolerance:±5% Tolerance:±5% Voltage Rating:50V Temperature Coefficient:C0G	
Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:25V Temperature Coefficient:X7R	
Default 0 ohm. Replace with same-footprint ferrite bead only after noise/ADC/EMI evaluation.	
Type:Thick Film Resistor Resistance:33Ω Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/℃ Temperature Coefficient:±100ppm/℃ Operating Temperature:-55℃~+155℃ Operating Temperature:-55℃~+155℃	
Type:Thick Film Resistor Resistance:1kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/℃ Temperature Coefficient:±100ppm/℃ Operating Temperature:-55℃~+155℃ Operating Temperature:-55℃~+155℃	

Type:Thick Film Resistor Resistance:27Ω Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/℃ Temperature Coefficient:±100ppm/℃ Operating Temperature:-55℃~+155℃ Operating Temperature:-55℃~+155℃	
Type:Thick Film Resistor Resistance:0Ω Tolerance:±5% Tolerance:±5% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:- Temperature Coefficient:- Operating Temperature:-55℃~+155℃ Operating Temperature:-55℃~+155℃	
Type:Thick Film Resistor Resistance:10kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/℃ Temperature Coefficient:±100ppm/℃ Operating Temperature:-55℃~+155℃ Operating Temperature:-55℃~+155℃	
CPU Core:ARM Cortex-M33 CPU Maximum Speed:150MHz Core Size:32 Bit Oscillator Type:Built-in+External Features:Independent watchdog (IWDG)；Undervoltage detection (BOR/LVD/LVR/LVI)；Calendar function；Power-on reset (POR)；True random number generator (TRNG)；Wa	
Interface:SPI Memory Size:128Mbit Clock Frequency:133MHz Voltage - Supply:2.7V~3.6V Voltage - Supply:2.7V~3.6V Standby Supply Current:1uA Program / Erase Cycles:100,000 cycles Write Cycle Time (tWC):- Page Programming Time (Tpp):3ms Block Erase Time(tBE):	
Type:SMD crystal oscillator Frequency:12MHz Normal temperature Frequency Tolerance:±30ppm Normal temperature Frequency Tolerance:±30ppm Load Capacitance:10pF Frequency Stability:±30ppm Frequency Stability:±30ppm Equivalent Series Resistance(ESR):50Ω Opera	

J5
J1
J6
J2
J4
J7
J3
GND
GP1
GP3
GP0
GP2
GP4
GP5
GP9
GP8
3V3
GP10
GP11
GP12
GP13
GP14
GP15
GP7
GP6
GP29
GP28
GP27
GP26
GP19
GP18
GP17
GP16
GP20
GP21
GP22
GP23
RUN
SWDIO
SWCLK
BOOT
GP24
GP25
D−
D+
USB
NC
3V3
GND
SWDIO
SWCLK
RUN
C17
R8
R7
R6
R4
C4
C12
C2
U2
C10
U1
C11
L1
C13
R2
C3
C8
C5
C6
C1
C14
C7
C9
C16
R5
C15
X1
R1
CraftVia
Core-S RP2350x2
v1 Rev0



CraftVia

CORE-S RP235xA

V1 REV0

MCU RP2350A / RP2354A

LOGIC 3.3 V

CPU DUAL M33 / HAZARD3 @ 150 MHz

FLASH 2 MB INT (2354A) / 16 MB EXT (2350A)

FORMAT 1.0 IN / 2.54 MM PITCH

CLOCK X1 12 MHz XTAL

CHECK ORIENTATION & PINOUT BEFORE INSERTION

DOCS craftvia.org

