


No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	LCSC Part Name
1	2	100nF	C1,C3	C0603	100nF	CC0603KRX7R9BB104	YAGEO(国巨)	C14663	LCSC	100nF ±10% 50V
2	1	4.7uF	C2	C0603	4.7uF	CL10A475KO8NNNC	SAMSUNG(三星)	C19666	LCSC	4.7uF ±10% 16V
3	1	N 1-8	J1	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		C49256	LCSC	直排针 2.54mm 1*8P
4	1	E 1-8	J2	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		C49256	LCSC	直排针 2.54mm 1*8P
5	1	S 1-8	J3	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		C49256	LCSC	直排针 2.54mm 1*8P
6	1	W 1-8	J4	HDR-TH_8P-P2.54-V-M		直排针2.54mm 1*8P		C49256	LCSC	直排针 2.54mm 1*8P
7	1	K-NW	J5	HDR-TH_1P-P2.54-V-M		2.54-1*1P针	BOOMELE(博穆精密)	C81276	LCSC	1x1P 方针直插
8	1	K-NE	J6	HDR-TH_1P-P2.54-V-M		2.54-1*1P针	BOOMELE(博穆精密)	C81276	LCSC	1x1P 方针直插
9	1	K-SW	J7	HDR-TH_1P-P2.54-V-M		2.54-1*1P针	BOOMELE(博穆精密)	C81276	LCSC	1x1P 方针直插
10	1	33R	R1	R0603	33Ω	0603WAF330JT5E	UNI-ROYAL(厚声)	C23140	LCSC	33Ω ±1% 100mW 厚膜电阻
11	1	1k	R2	R0603	1kΩ	0603WAF1001T5E	UNI-ROYAL(厚声)	C21190	LCSC	1kΩ ±1% 100mW 厚膜电阻
12	1	0R GPIO link	R3	R0603	0Ω	0603WAF000T5E	UNI-ROYAL(厚声)	C21189	LCSC	厚膜电阻 0Ω ±1%
13	1	0R / FB option	R7	R0603	0Ω	0603WAF000T5E	UNI-ROYAL(厚声)	C21189	LCSC	厚膜电阻 0Ω ±1%
14	1	0R	R10	R0603	0Ω	0603WAF000T5E	UNI-ROYAL(厚声)	C21189	LCSC	厚膜电阻 0Ω ±1%
15	1	STM32G031K8T6	U1	LQFP-32 L7.0-W7.0-P0.8 0-LS9.0-BL		STM32G031K8T6	ST(意法半导体)	C432203	LCSC	主流Arm Cortex-M0+ MCU，具有64 KB Flash存储器、8 KB RAM、64 MHz CPU、2x US ART、定时器、ADC和通信接口，1.7-3.6V

Description	Mounting Type
Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R	
Capacitance:4.7uF Tolerance:±10% Tolerance:±10% Voltage Rating:16V Temperature Coefficient:X5R	
Circular Pins/Square Pins:- Current Rating (Max):- Voltage Rating (Max):- Length of Mating Pin:- Insulation Height:- Contact Material:	
Circular Pins/Square Pins:- Current Rating (Max):- Voltage Rating (Max):- Length of Mating Pin:- Insulation Height:- Contact Material:	
Circular Pins/Square Pins:- Current Rating (Max):- Voltage Rating (Max):- Length of Mating Pin:- Insulation Height:- Contact Material:	
Circular Pins/Square Pins:- Current Rating (Max):- Voltage Rating (Max):- Length of Mating Pin:- Insulation Height:- Contact Material:	
Pin Structure:1x1P Pitch:- Row Spacing:- Circular Pins/Square Pins:Pin Header Mounting Type:Through Hole Number of Rows:1 Number of Pins:1P Current Rating:3A Voltage Rating (Max):- Length of Mating Pin:6mm Insulation Height:2.5mm Length of End Connection	Through Hole
Pin Structure:1x1P Pitch:- Row Spacing:- Circular Pins/Square Pins:Pin Header Mounting Type:Through Hole Number of Rows:1 Number of Pins:1P Current Rating:3A Voltage Rating (Max):- Length of Mating Pin:6mm Insulation Height:2.5mm Length of End Connection	Through Hole
Pin Structure:1x1P Pitch:- Row Spacing:- Circular Pins/Square Pins:Pin Header Mounting Type:Through Hole Number of Rows:1 Number of Pins:1P Current Rating:3A Voltage Rating (Max):- Length of Mating Pin:6mm Insulation Height:2.5mm Length of End Connection	Through Hole
Type:Thick Film Resistor Resistance:33Ω Tolerance:±1% Tolerance:±1% Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C	

Type:Thick Film Resistor Resistance:1k Ω Tolerance: $\pm 1\%$ Tolerance: $\pm 1\%$ Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$ Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$ Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$ Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$	
Type:Thick Film Resistor Resistance:0 Ω Tolerance: $\pm 1\%$ Tolerance: $\pm 1\%$ Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:- Temperature Coefficient:- Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$ Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$	
Type:Thick Film Resistor Resistance:0 Ω Tolerance: $\pm 1\%$ Tolerance: $\pm 1\%$ Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:- Temperature Coefficient:- Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$ Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$	
Type:Thick Film Resistor Resistance:0 Ω Tolerance: $\pm 1\%$ Tolerance: $\pm 1\%$ Power(Watts):100mW Voltage-Supply(Max):75V Temperature Coefficient:- Temperature Coefficient:- Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$ Operating Temperature:-55 $^\circ\text{C}$ ~+155 $^\circ\text{C}$	
CPU Core:ARM Cortex-M0+ CPU Maximum Speed:64MHz Core Size:32 Bit Program Storage Size:64KB Program Memory Type:FLASH RAM Size:8KB EEPROM:- Number of I/O:30 ADC (Bit):12bit Oscillator Type:Built-in+External Voltage - Supply:1.7V~3.6V Voltage - Supply:1.7V~	

CraftVia

MakerCard-S Rev0

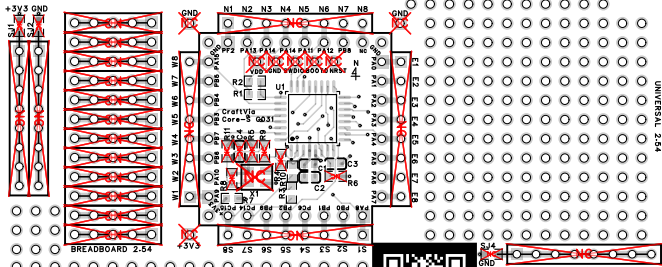

UNIVERSAL 2.54



Scan to build
<https://craftvia.org/mc>

UNIVERSAL 2.54


CraftVia

Maker Profile

PROTO GRID A / 2.54mm

1

2



Kohei Ikeda

Project Founder.

MAKES.

Electronics & Code.


INTERESTS

MCUs & Open Hardware

E-mail

kohei.ikeda@aks-j.co.jp

PROTO GRID B / 2.54mm



A small platform
to try, build,
and share.



