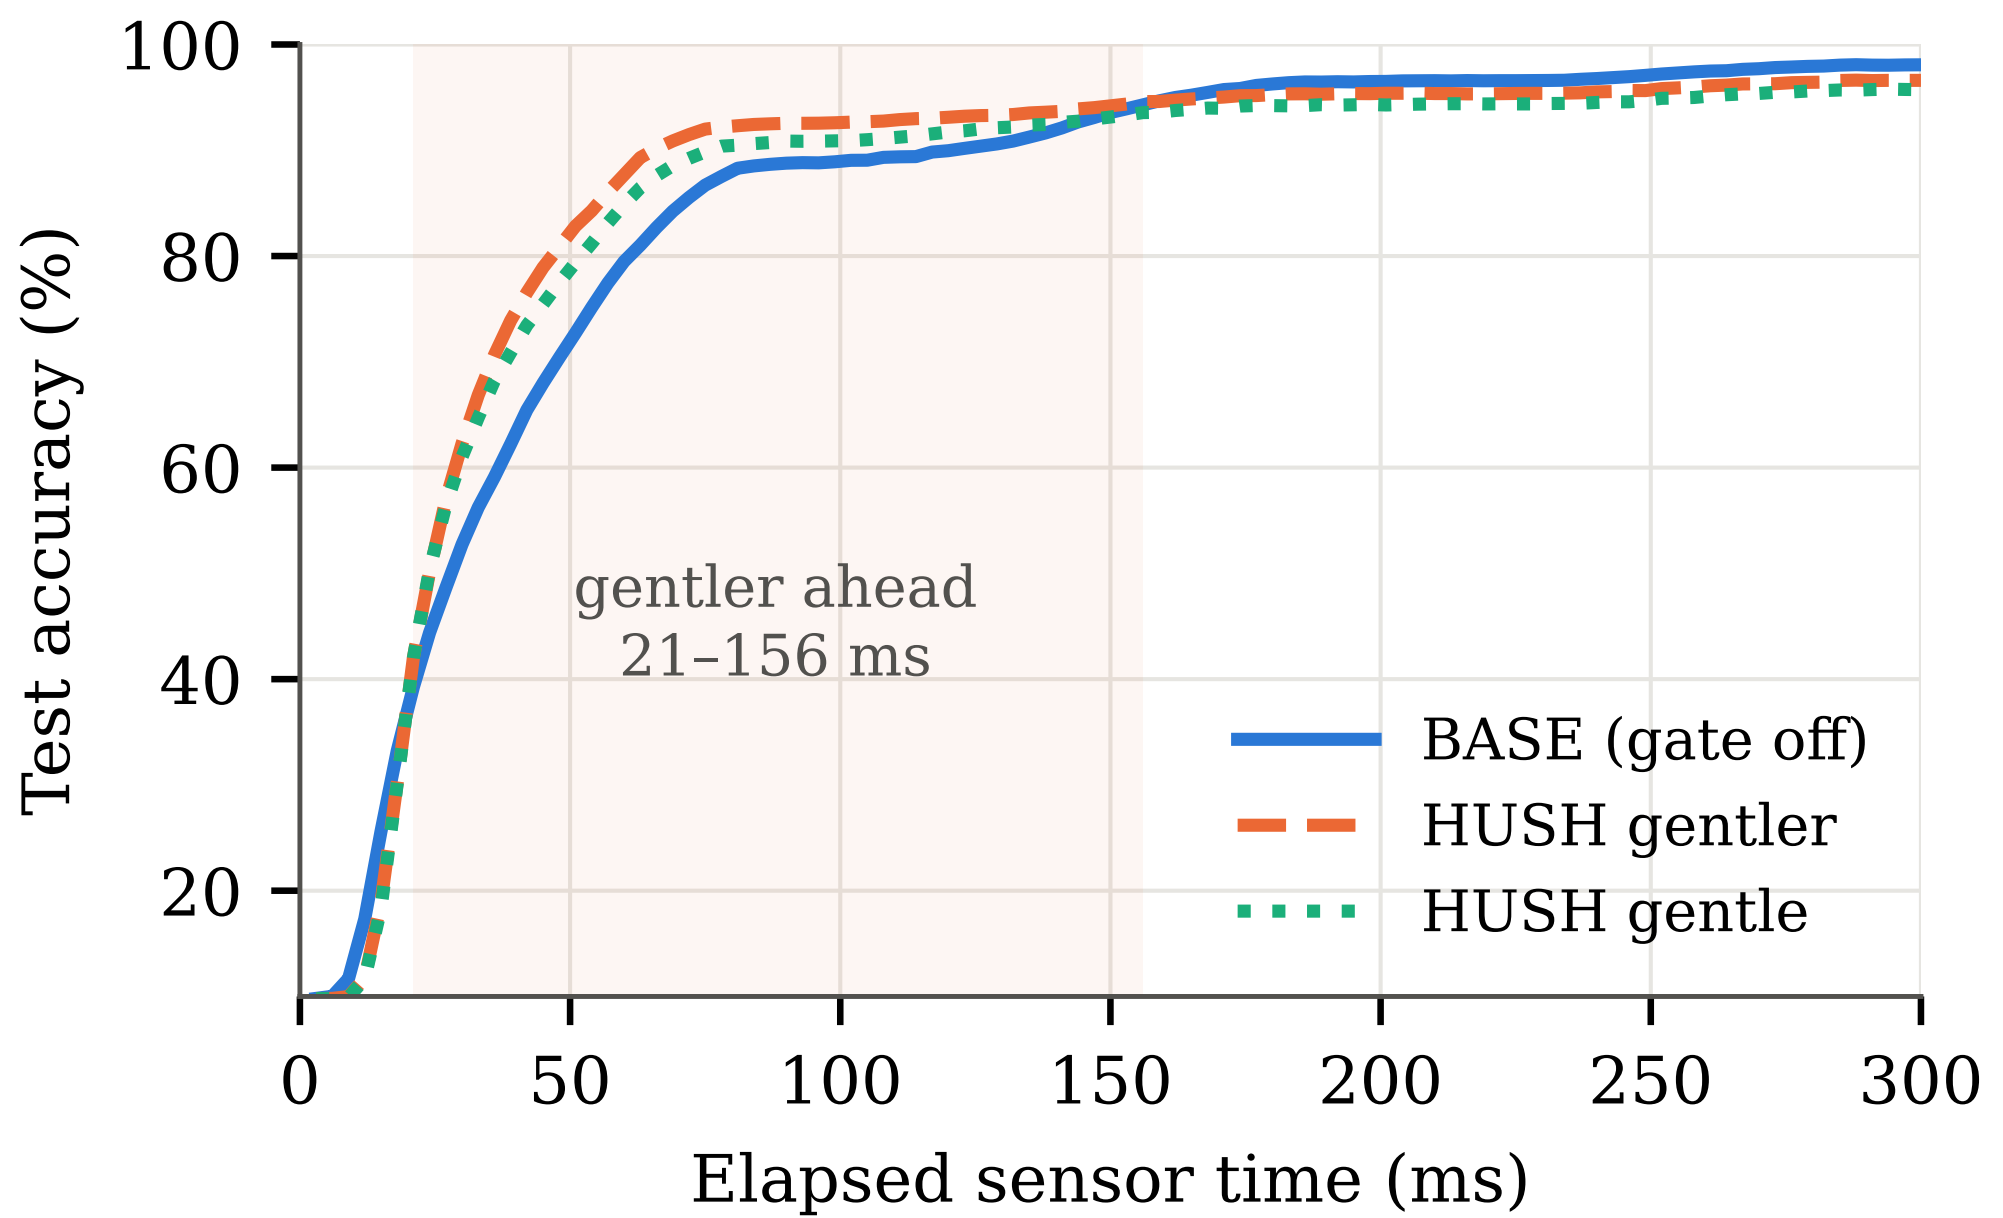
100
80
60
40
20
Test accuracy (%)
gentler ahead
21–156 ms
BASE (gate off)
HUSH gentler
HUSH gentle
0
50
100
150
200
250
300
Elapsed sensor time (ms)