

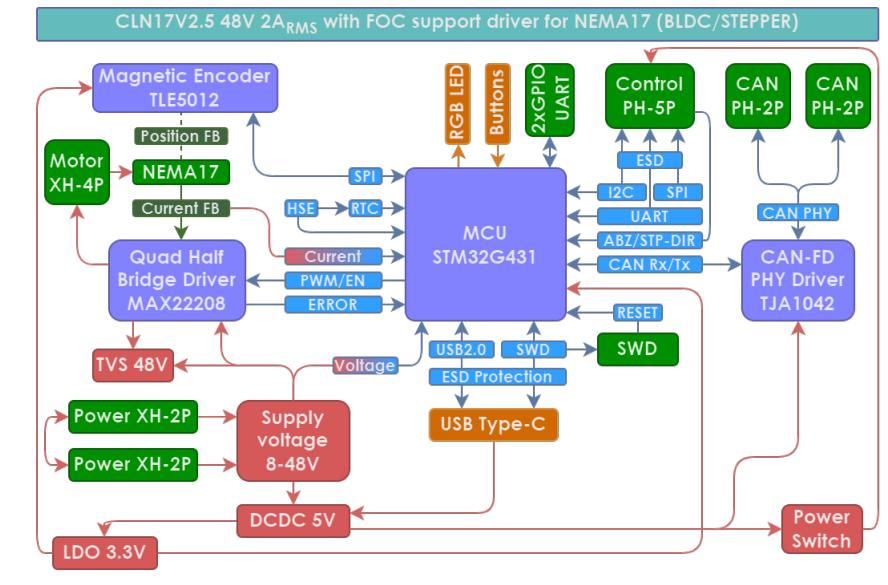
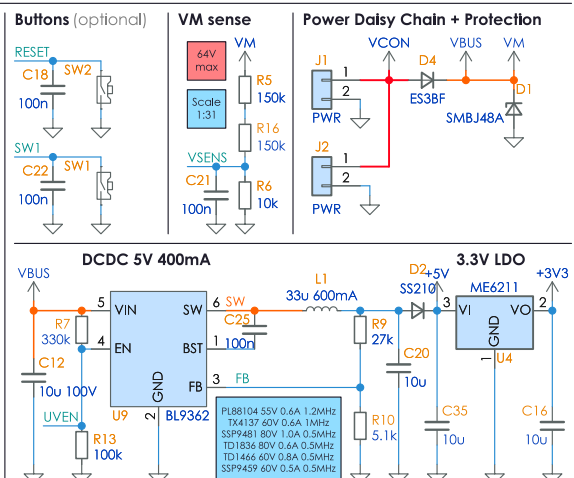
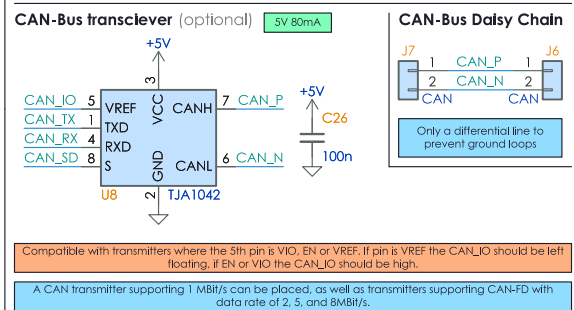
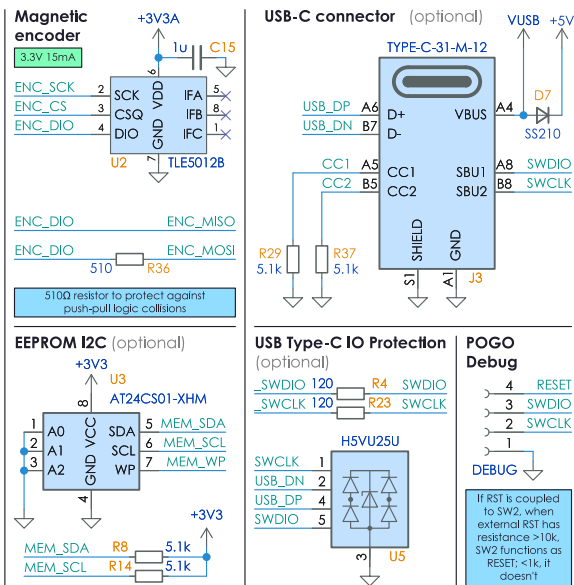
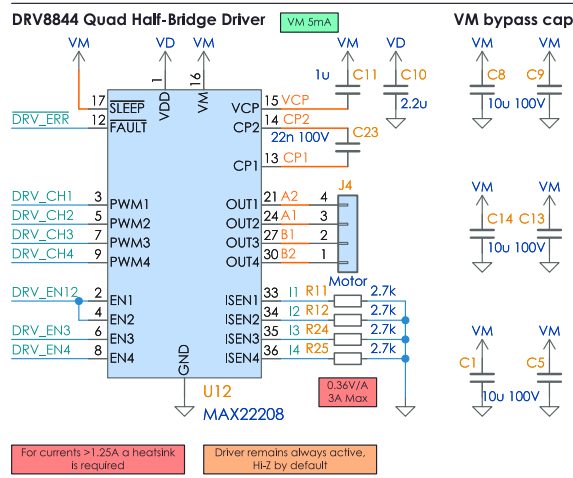
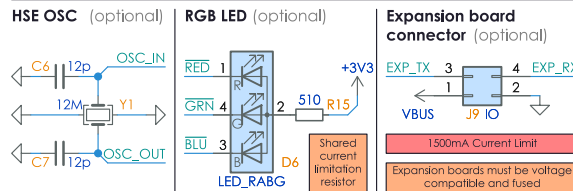


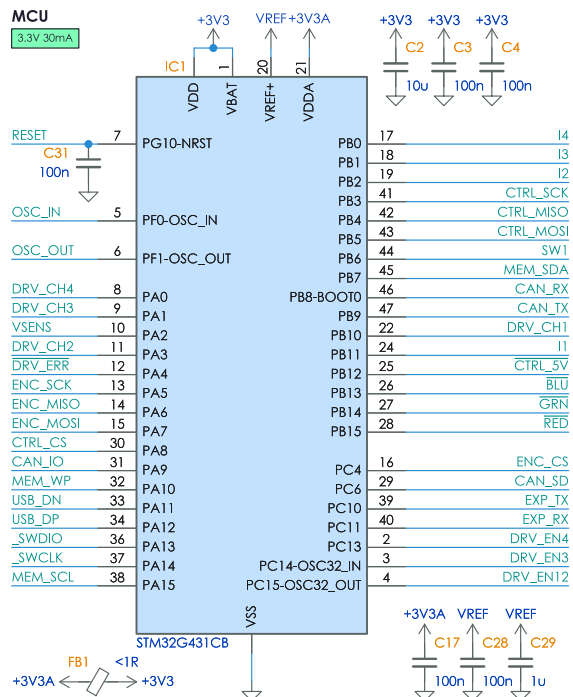


Design Keynotes


- All components have a minimum of 20% voltages margin allowing them to withstand temporary voltage spikes up to 60V without any damage.
- The analogue power supply has single connection point, with a 1uF bypass capacitor for power stabilization and a 100nF bypass near each consumer.
- CAN-Bus and POWER connectors are interconnected, forming a Daisy Chain topology for simplified connection of multiple drivers. Each POWER connector has a 2.5A current limit for safe operation.
- All interfaces are protected against electrostatic discharge, overvoltage, and reverse polarity.
- CTRL additionally has protection against over currents at rated voltage. CAN-Bus and CTRL interfaces are compatible with 3.3V and 5V logic levels.




Control connector




Control IO protection



Control IO PullUp



ENB 5V (optional)



Title: CLN17 V2.5 Closed-Loop Stepper Motor Driver

More information on <https://creapunk.com/chn17>

Designed by
CLN17 project

Released under the Creative Commons
Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0)
<https://creativecommons.org/licenses/by-nc-sa/4.0/>

Sheet: /

Sheet №: 1/1

Date: 2024-07

Rev: 1.0

