

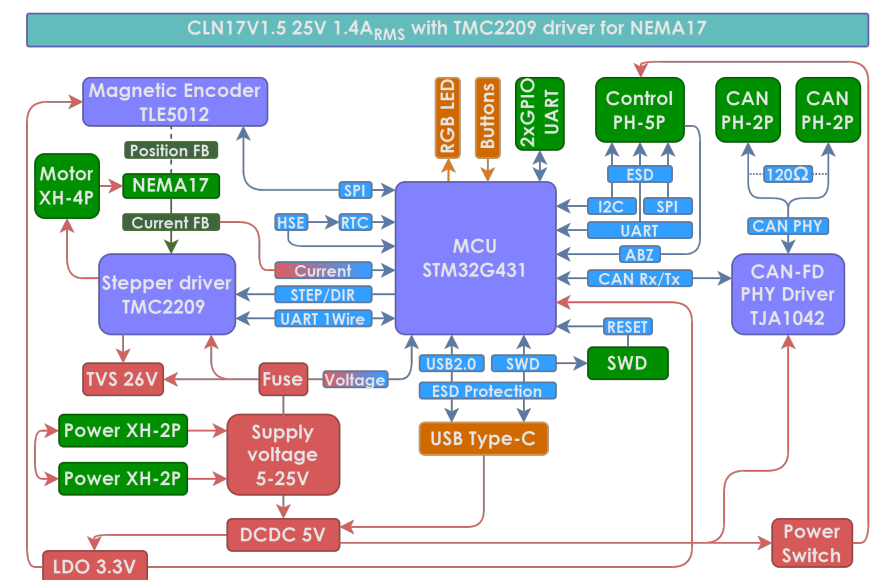
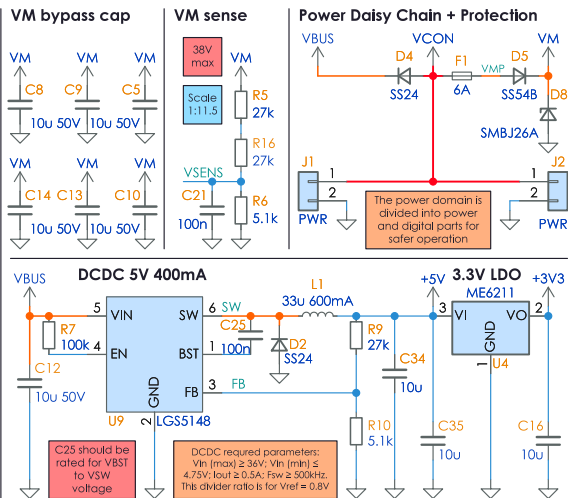
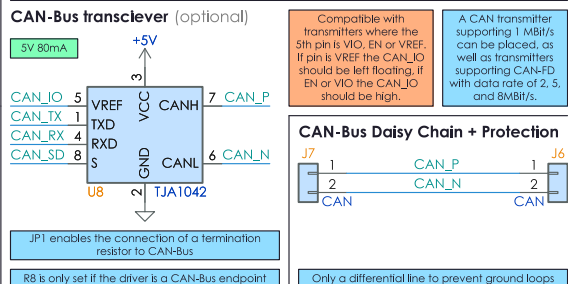
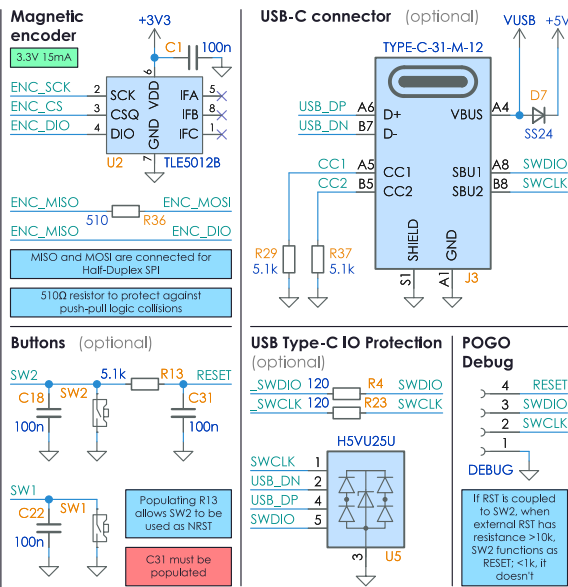
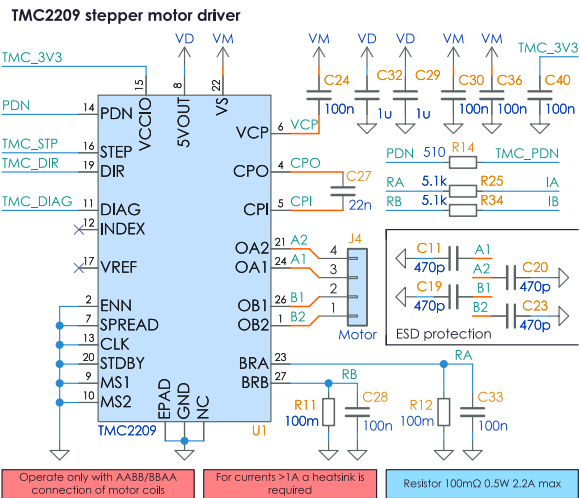
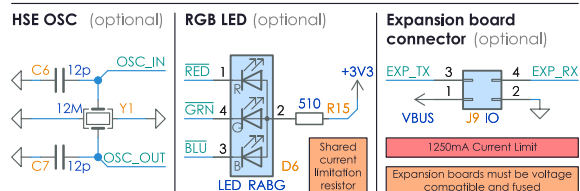
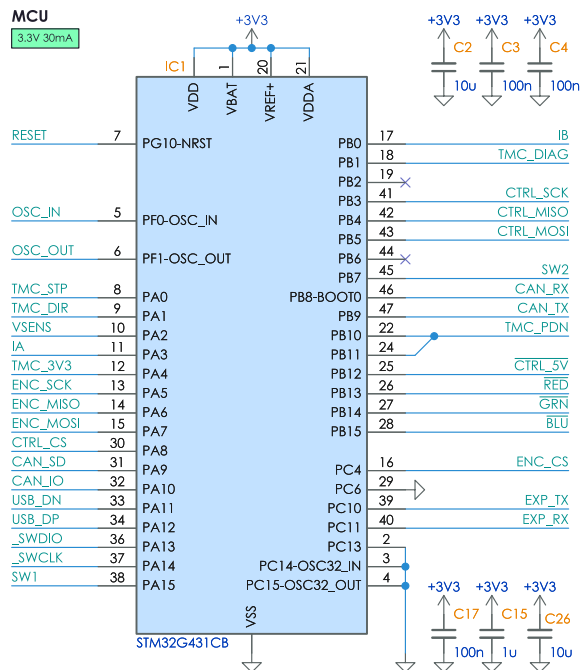


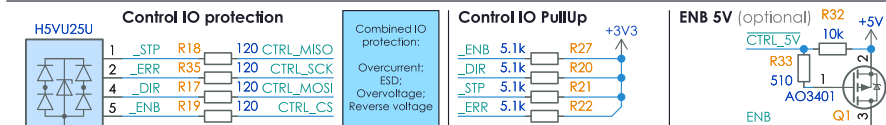

Design Keynotes

- Design separated to power and logic sections. The power section consists of the driver, necessary circuitry, reverse polarity protection, overcurrent protection, and overvoltage protection. It also provides freewheeling when unpowered.
- All components have a minimum of 20% voltages margin allowing them to withstand temporary voltage spikes up to 30V without any damage.
- The analog power supply has single connection point, with a 10uF bypass capacitor for power stabilization and a 100nF bypass near each consumer.
- CAN-Bus and POWER connectors are interconnected, forming a Daisy Chain topology for simplified connection of multiple drivers. Each POWER connector has a 2.5A current limit for safe operation.
- All interfaces are protected against electrostatic discharge, overvoltage, and reverse polarity. CTRL additionally has protection against over currents at rated voltage. CAN-Bus and CTRL interfaces are compatible with 3.3V and 5V logic levels.

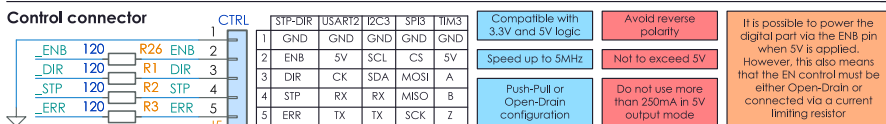

More information on <https://creapunk.com/cln17>

Designed by
Anton Khrustalev
Released under the Creative Commons
Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0)
<https://creativecommons.org/licenses/by-nc-sa/4.0/>

Title: CLN17 V1.5 Closed-Loop Stepper Motor Driver

Sheet: Root

Sheet #: 1/1

CLN17 project

Rev: 1.1

Date: 2024-03