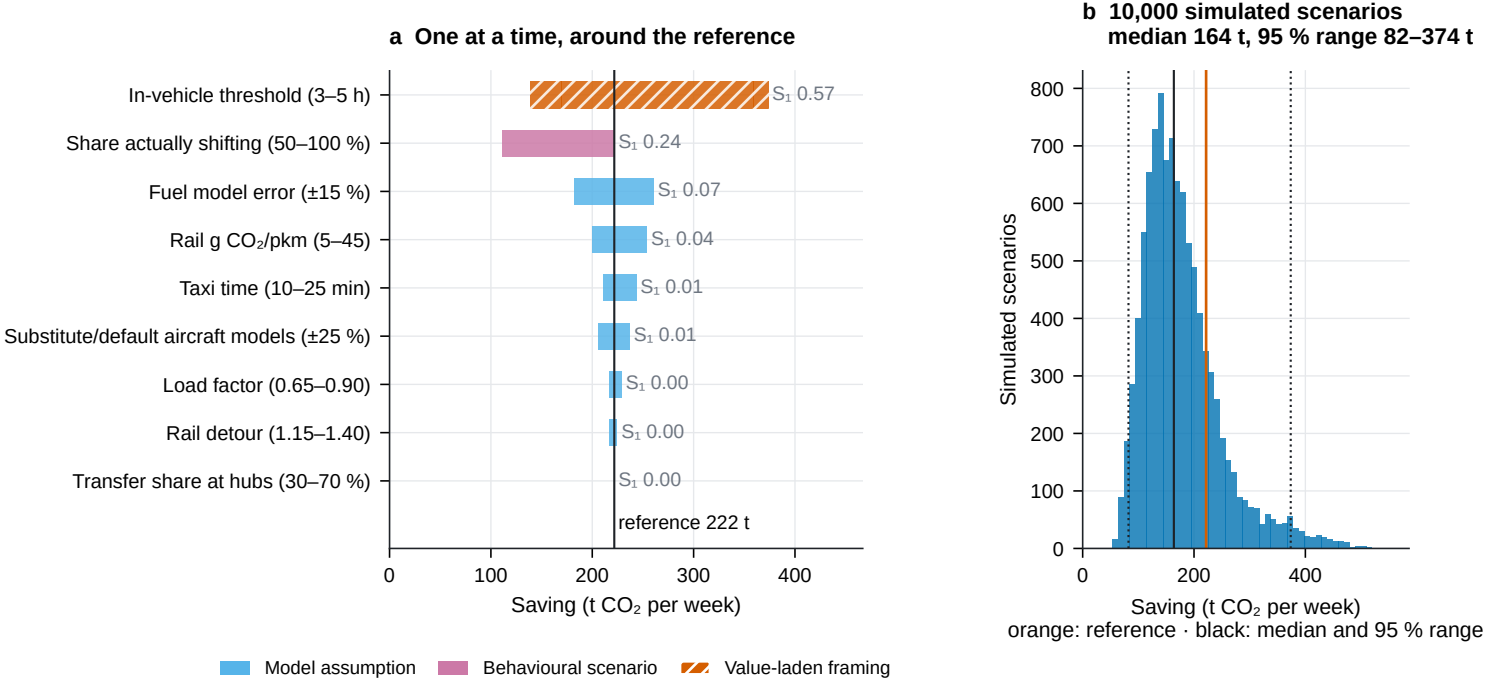
a One at a time, around the reference
In-vehicle threshold (3–5 h)
Share actually shifting (50–100 %)
Fuel model error (±15 %)
Rail g CO₂/pkm (5–45)
Taxi time (10–25 min)
Substitute/default aircraft models (±25 %)
Load factor (0.65–0.90)
Rail detour (1.15–1.40)
Transfer share at hubs (30–70 %)
S₁ 0.57
S₁ 0.24
S₁ 0.07
S₁ 0.04
S₁ 0.01
S₁ 0.01
S₁ 0.00
S₁ 0.00
S₁ 0.00
reference 222 t
0
100
200
300
400
Saving (t CO₂ per week)
b 10,000 simulated scenarios
median 164 t, 95 % range 82–374 t
Simulated scenarios
800
700
600
500
400
300
200
100
0
0
200
400
Saving (t CO₂ per week)
orange: reference · black: median and 95 % range
Model assumption
Behavioural scenario
Value-laden framing