10 Years of Making a Difference

GOLDI SOLAR

HELOC® PLUS | GS12R-T132-GF

(600 Wp - 625 Wp)

High Saving
Lower LCOE, reduced BOS cost, shorter payback time

High Efficiency
Excellent module conversion efficiency of up to 23.13%

Better Weak Illumination Response
Higher power output even under low-light environments like on cloudy or foggy days

ZERO LID (Light Induced Degradation)
N-Type Solar cell Technology offers No-LeTID & No-LID

PID Resistance
Excellent Anti-PID Performance guarantee limited power degradation for mass production

10-30% Additional Power Generation
More than 10-30% additional power gain comparing with the regular modules.

Wider Applicability
More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area

MADE IN INDIA ★ MADE IN INDIA

INDUSTRY LEADING PROTECTION

12 YEARS — 12 Years Warranty For Materials And Processing

30 YEARS — 30 Years Warranty For Linear Power Output

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018 certified facility

BEST IN Grade Quality Class Results



TECHNICAL DATA

Electrical Parameter at STC	Bifacial Monocrystalline Module					
Module Type	GS12R-T132-GF					
Capacity rating – Pmax(Wp)	600	605	610	615	620	625
Power Tolerance (%)	0-2					
Module efficiency (%)	22.21	22.39	22.58	22.76	22.95	23.13
Rated voltage - Vmp(V)	40.30	40.50	40.70	40.90	41.10	41.30
Rated current - Imp(A)	14.89	14.94	14.99	15.04	15.09	15.14
Open circuit voltage - Voc(V)	48.40	48.70	49.00	49.30	49.60	49.90
Short circuit current - Isc(A)	15.80	15.83	15.86	15.89	15.92	15.95

Under Standard Test Conditions (STC) of irradiance 1000 W/m², spectrum AM 1.5 and Module temperature of 25°C. Except Pmax, all other parameters have a tolerance of ±3%.

Electrical Characteristics with 10% rear side power gain#

Capacity rating – Pmax(Wp)	665	670	676	681	687	693
Rated voltage - Vmp(V)	40.30	40.50	40.70	40.90	41.10	41.30
Rated current - Imp(A)	16.50	16.55	16.61	16.66	16.72	16.78
Open circuit voltage - Voc(V)	48.40	48.70	49.00	49.30	49.60	49.90
Short circuit current - Isc(A)	17.51	17.54	17.57	17.61	17.64	17.67

Additional power gain from rear side compared to power of front side at STC depends on mounting structure (height, tilt angle etc.) and reflectivity of ground.
Bi-Faciality Factor : 80 ± 5 %

PERMISSIBLE OPERATING CONDITIONS

Temperature range	-40°C to + 85°C
Maximum system voltage	1500 VDC
NMOT	45± 2°C
Hail resistance	Max. diameter of 25 mm with velocity 23 m/s

TEMPERATURE COEFFICIENTS (TC)

Temperature Coefficient (Voc)	-0.25% /°C
Temperature Coefficient (Isc)	0.045% /°C
Temperature Coefficient (Pmax)	-0.30% /°C

PACKAGING CONFIGURATION##

Number of Modules per Pallet	36
No of pallet	20
No of module, 40ft HC container	720

IV CURVE



PV CURVE



LINEAR GRAPH

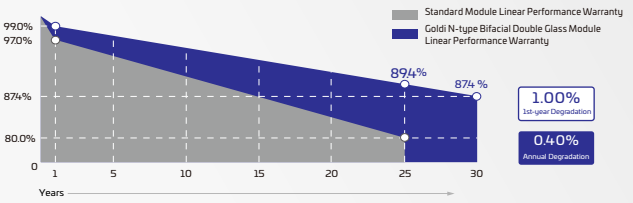

12 Years Product Material & Workmanship | 30 Years Linear Performance Warranty

MECHANICAL SPECIFICATION

Solar cells	132 pcs TOPCon cell technology, Multi BB(210mmx182.2mm)
Encapsulation	PID & UV resistance
Frame	Silver Anodized Aluminium Alloy
Front Glass	2.0 mm, High Transmission, AR Coated Semi Tempered Glass
Back Glass	2.0 mm, Heat Strengthened Glass
Dimensions	(L) 2382 mm x (W) 1134 mm x (H) 30 mm"
Weight	~33.7 Kg
J-box	IP 68 certified, 3 diodes, Split junction box
Series Fuse Rating	30 A
Cable	4 mm², Solar cable 400mm/1400mm length or Customized length
Connectors	MC4 Type
Application Class	Class A
Electrical Safety	Class II
Fire Safety	Class C (Type 1)
Surface load	Snow load 5400 Pa, Wind load 2400 Pa

DRAWING (MEASUREMENTS ARE IN MM)

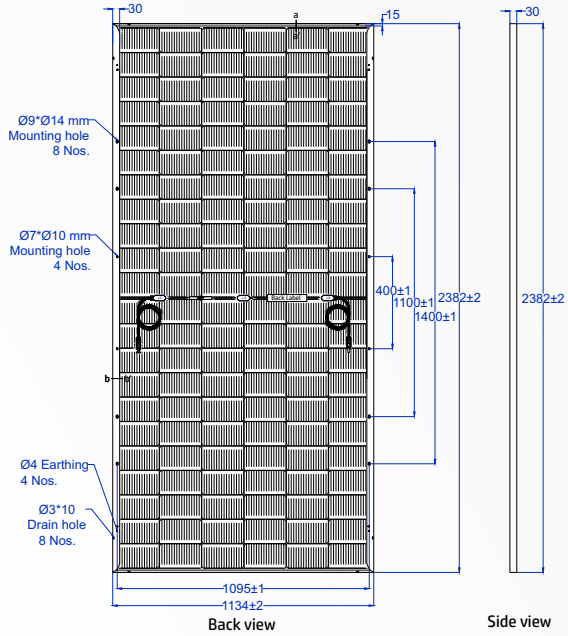

"Unspecified dimensions tolerance are according to ISO 2768-1, class m."

PRODUCT CERTIFICATIONS

CE

MANAGEMENT SYSTEM CERTIFICATIONS

ISO 9001, ISO 14001, ISO 45001

TDS-GS12T132GF-V 1.1

UTILITY | INDUSTRIAL | AGRICULTURE | RESIDENTIAL | INSTITUTIONAL

- ##Quantity of modules/container may get changed without prior notice.
- For handling & installation instructions, refer to Goldi's installation manual available on the company website
- Before placing an order, confirm your requirements with our sales representative
- The electrical data provided is for reference purposes only
- PV modules needs to be disposed as per goverment regulations, after it's life cycle
- Refer to Goldi's warranty document for terms and conditions
- Due to constant product modifications, Goldi reserves the right to amend the above specifications without prior notice
- Images in the datasheet are for representation purpose only

1800 833 5511
info@goldisolar.com
goldisolar.com