RenewSys®
let there be light

TOPCon Series
Bifacial Dual Glass

*Module image for representation purpose only

DESERV® EXTREME 144X 565 WP - 600 WP

OUTPUT
Up to 600 Wp

EFFICIENCY
UP TO 23.26%

TEMPERATURE COEFFICIENT -0.29 %/°C

WARRANTY
12-year of product
30-year of power output

World-class products, Made in India

- **Smart**: High module efficiency with 144X half-cut Mono crystalline Bi-facial TopCon Solar Cell
- **Modern**: Processed on state-of the-art technology production lines
- **Dependable**: Use of highest quality raw materials coupled with rigorous in-house testing
- **Versatile**: Suitable for Utility, Rooftop, and other general applications

Certifications:

- IEC TS 62804-1: (585 Wp)
- IEC 61853-1: 600,595 & 590Wp
- IEC 61853-2: 600,595 & 590Wp
- IMS Certified Company - ISO 9001: 2015
- OHSAS 45001: 2018
- EMS - ISO 14001: 2015
- Independently audited by SOLARBUYER
- BIS Number R-63000760 (565 Wp-600 Wp)
- ALMM (565 Wp - 600 Wp)

Independently Audited by SOLARBUYER

RenewSys is the first integrated manufacturer of Solar PV Modules and its key components - Encapsulants (EVA and POE), Backsheets and Solar PV Cells. We have a global presence with offices in India, Mauritius, Nigeria, South Africa, Singapore, UAE, representatives in Europe, USA, Mexico, and an evolving distributor network.

Registered Office: Unit No. 607, 6th Floor, Trade Center, Bandra-Kurla Complex, Bandra East, Mumbai - 400 051, Maharashtra, India.

Factory: Plot No. E-141, Additional Patalganga MIDC Industrial Area, Village - Karade Khurd, Taluka Panvel, District Raigad - 410 206, Maharashtra, India.

Factory: Plot No.6, Survey # 114/P, Srinagar Village, Maheshwaram Mandal, Dist - Rangareddy, Hyderabad - 501 359, Telangana, India.

Bifacial Dual Glass

Performance under standard test conditions (1000w/m², AM 1.5, 25 ºC)

DESERV Extreme 144 Bi-Facial Gain @Different Albedo (%)

		Pm (Wp)	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Efficiency (%)	Pm (Wp)	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Efficiency (%)
Front @STC		**565**	42.87	13.19	52.30	13.75	21.90	**570**	43.05	13.24	52.50	13.80	22.09
Bi-Facial Gain	5%	593.25	42.87	13.84	52.30	14.39	23.00	598.5	43.05	13.90	52.50	14.45	23.20
	10%	621.5	42.87	14.50	52.30	15.05	24.09	627	43.05	14.56	52.50	15.12	24.30
	20%	678	42.87	15.82	52.30	16.37	26.28	684	43.05	15.89	52.50	16.44	26.51
Front @STC		**575**	43.28	13.29	52.78	13.85	22.29	**580**	43.50	13.34	53.03	13.89	22.48
Bi-Facial Gain	5%	603.75	43.28	13.95	52.78	14.50	23.40	609	43.50	14.00	53.03	14.55	23.61
	10%	632.5	43.28	14.61	52.78	15.17	24.52	638	43.50	14.67	53.03	15.21	24.73
	20%	690	43.28	15.94	52.78	16.50	26.75	696	43.50	16.00	53.03	16.55	26.98
Front @STC		**585**	43.74	13.38	53.27	13.93	22.68	**590**	43.93	13.44	53.51	13.97	22.87
Bi-Facial Gain	5%	614.25	43.74	14.04	53.27	14.59	23.81	619.5	43.93	14.10	53.51	14.63	24.01
	10%	643.5	43.74	14.71	53.27	15.26	24.94	649	43.93	14.77	53.51	15.30	25.16
	20%	702	43.74	16.05	53.27	16.59	27.21	708	43.93	16.12	53.51	16.64	27.44
Front @STC		**595**	44.16	13.48	53.75	14.01	23.06	**600**	44.37	13.53	54.00	14.05	23.26
Bi-Facial Gain	5%	624.75	44.16	14.15	53.75	14.67	24.22	630	44.37	14.20	54.00	14.71	24.42
	10%	654.5	44.16	14.82	53.75	15.35	25.37	660	44.37	14.87	54.00	15.39	25.58
	20%	714	44.16	16.17	53.75	16.69	27.68	720	44.37	16.23	54.00	16.74	27.91

NOCT (Wp) at 45 ± 2 ºC @800 W/m²	565	570	575	580	585	590	595	600
Pmax (W)	420.49	424.21	427.93	431.65	435.38	439.10	442.82	446.54
Max. power voltage (Vmp), V	39.21	39.38	39.58	39.78	40.00	40.18	40.39	40.58
Max. power current (Imp), A	10.74	10.78	10.82	10.86	10.89	10.94	10.97	11.01
Open circuit voltage (Voc), V	48.63	48.82	49.08	49.30	49.53	49.76	49.98	50.21
Short circuit current (Isc), A	11.23	11.27	11.31	11.34	11.38	11.41	11.44	11.47

Bi-faciality factor: 80 ± 5%

Mechanical Characteristics

Cable	No. 12 AWG, 4mm
PV Connectors	MC4 Compatible
Frame	Anodized Aluminum Alloy
Junction box	IP68 Split junction
Glass (front)	2.0mm AR Coated Semi Tempered Glass
Glass (back)	2.0mm Semi Tempered Glass.

Operating Conditions

Temperature, ºC	-40 to +85
Max. system voltage, Vdc	1500
Hail impact velocity, m/sec	23
Max. surface load capacity, Pa	5400
Max. wind speed capacity, Pa	2400
Series fuse rating, A	30

Physical Parameters

No. of cells	144
Module dimension (mm)	2277 X 1133 (± 2)
Module thickness (mm)	35
Approximate weight (kg)	31.5

Cell Temperature Coefficient	Bi-Facial
Open circuit voltage	-0.2764 % / ºC
Short circuit current	+0.0572 % / ºC
Peak power	-0.2915 % / ºC

Test uncertainty for Pmax ± 3%

Bi-facial gain subject to mounting structure specifications and albedo % of ground

Frame Cross Section



Mounting Hole



Width flangeless



Module Dimension Diagram (mm)

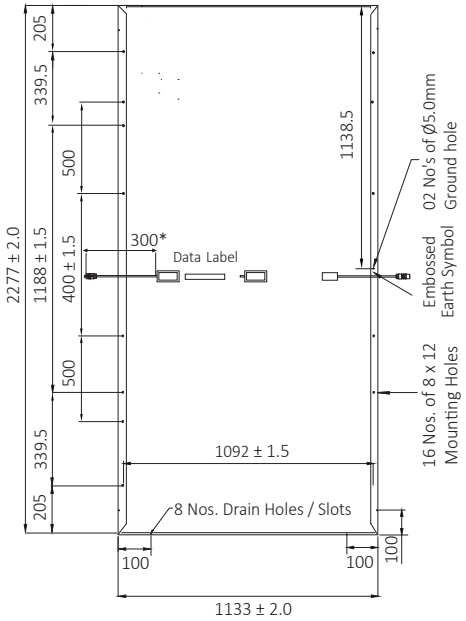

IV Curves

Cell temperature sensitivity chart are for 585 WP

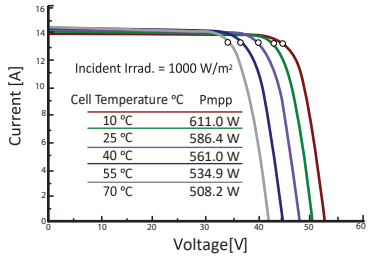

Incident irradiance sensitivity chart are for 585 WP

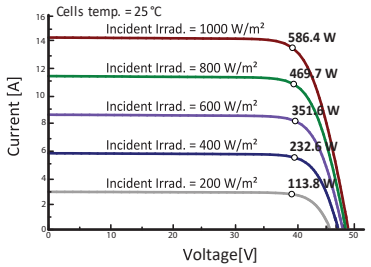

-Please refer to the installation manual for detailed information.

*Due to continuous product updation, specifications may change without notice. Kindly refer to the website for latest information: www.renewsysworld.com

*Recycle Responsibily/RenewSys recommends recycling in accordance with local government e-waste notifications.

*Standard frame : Width side frame cross section is flange less, Flange is available on request.