

AXIbipremium XXL HC MT

510 - 550 Wp

High performance solar module
144 halfcell, monocrystalline

ALMM Enlisted Products

PIXMBHDTB-144-510

PIXMBHDTB-144-515

PIXMBHDTB-144-520

PIXMBHDTB-144-525

PIXMBHDTB-144-530

PIXMBHDTB-144-535

PIXMBHDTB-144-540

PIXMBHDTB-144-545

PIXMBHDTB-144-550

Pixon Green

Equivalent Products

AC-510MBT/144V

AC-515MBT/144V

AC-520MBT/144V

AC-525MBT/144V

AC-530MBT/144V


AC-535MBT/144V

AC-540MBT/144V

AC-545MBT/144V

AC-550MBT/144V

AXITEC

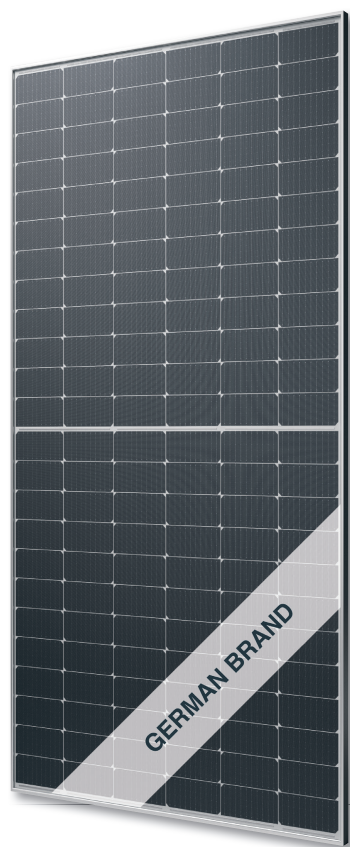

ALMM Declaration

- The AXITEC Products mentioned above are manufactured by Pixon Green Energy Pvt. Ltd.: at the following address covered under the ALMM list: R.S. No.: 157/1, 158/1, 158/2, 165/1, 166 of Khijadiya Nana, R.S. No.: 15/1, Rajkot – Jamnagar Highway, Paddhari, Rajkot – 360110.
- Pixon Green Energy Pvt. Ltd. products mentioned above are both BIS approved and ALMM enlisted

This product has been manufactured under the technical supervision of AXITEC. For further information on warranty and installation procedures, please visit www.axitecsolar.com

Warranty by
AXITEC Energy GmbH & Co. KG
Otto-Lilienthal-Str.5, 71034 Böblingen, Germany

+49 (0)7031 6288-5186,
energy@axitecsolar.com
www.axitecsolar.com

Manufactured by:

Pixon Green Energy Pvt. Ltd.
Manufacturing Unit: R.S. No.: 157/1, 158/1, 158/2, 165/1, 166 of Khijadiya Nana, R.S. No.: 15/1, Rajkot – Jamnagar Highway, Paddhari, Rajkot – 360110
1800 108 8800 | sales@pixonenergy.com



PIXON
Redefining Solar

Authorized OEM Partner

AXIbipremium XXL HC MT

510 - 550 Wp


High performance bifacial solar module
144 halfcell. monocrystalline

The advantages:

- 15 Years** 15 years Manufacturer's warranty
- +25%** Up to 25 % more power output by Bifacial-Technology
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100 % visual electroluminescence inspection in production
- E Frame** High stability due to innovative frame design
- IP 68** High quality junction box and connector systems
- 25 Years** 25 years Performance guarantee



Exclusive linear AXITEC high performance guarantee!

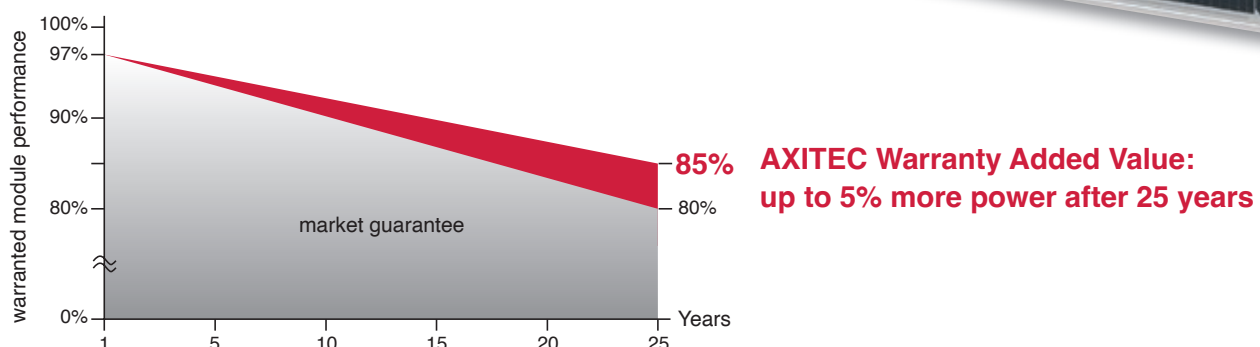

AXIbipremium XXL HC MT 510 - 550 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
PIXMBHDTB-144-510	510 Wp	40.86 V	12.49 A	13.45 A	48.47 V	19.76%
PIXMBHDTB-144-515	515 Wp	41.91 V	12.59 A	13.55 A	48.62 V	19.94%
PIXMBHDTB-144-520	520 Wp	41.05 V	12.67 A	13.61 A	48.85 V	20.13%
PIXMBHDTB-144-525	525 Wp	41.20 V	12.75 A	13.65 A	49.05 V	20.33%
PIXMBHDTB-144-530	530 Wp	41.35 V	12.82 A	13.71 A	49.20 V	20.52%
PIXMBHDTB-144-535	535 Wp	41.50 V	12.90 A	13.78 A	49.35 V	20.72%
PIXMBHDTB-144-540	540 Wp	41.65 V	12.97 A	13.85 A	49.50 V	20.91%
PIXMBHDTB-144-545	545 Wp	41.80 V	13.04 A	13.92 A	49.65 V	21.10%
PIXMBHDTB-144-550	550 Wp	41.96 V	13.11 A	13.99 A	49.80 V	21.29%

Type	10% Power Output	Module Efficiency	20% Power Output	Module Efficiency	30% Power Output	Module Efficiency
PIXMBHDTB-144-510	561 W	21.72%	612 W	23.69%	663 W	25.67%
PIXMBHDTB-144-515	567 W	21.93%	618 W	23.92%	670 W	25.92%
PIXMBHDTB-144-520	572 W	22.14%	624 W	24.16%	676 W	26.17%
PIXMBHDTB-144-525	578 W	22.36%	630 W	24.39%	683 W	26.42%
PIXMBHDTB-144-530	583 W	22.57%	636 W	24.62%	689 W	26.67%
PIXMBHDTB-144-535	589 W	22.78%	642 W	24.85%	696 W	26.92%
PIXMBHDTB-144-540	594 W	22.99%	648 W	25.08%	702 W	27.18%
PIXMBHDTB-144-545	600 W	23.21%	654 W	25.32%	709 W	27.43%
PIXMBHDTB-144-550	605 W	23.42%	660 W	25.55%	715 W	27.68%

Design

Frontside	3.2 mm hardened, low-reflection white glass
Backside	Composite film, cell gaps transparent
Cells	144 bifacial-monocrystalline high efficiency cells
Frame	35 mm silver aluminium frame

Mechanical data

L x W x H	2278 mm X 1134 mm X 35 mm
Weight	27 Kg ± 2% kg with frame

Mechanical load


Design load (pressure/suction) 3600 Pa / 1600 Pa *

Test load (pressure/suction) 5400 Pa / 2400 Pa *

* depending on the type of installation according to the installation instructions

Power connection

Socket	Protection Class IP68
Wire	approx. 400mm 4 mm ²
Plug-in system	Plug/socket IP68. Stäubli EVO2 / EVO2 pluggable

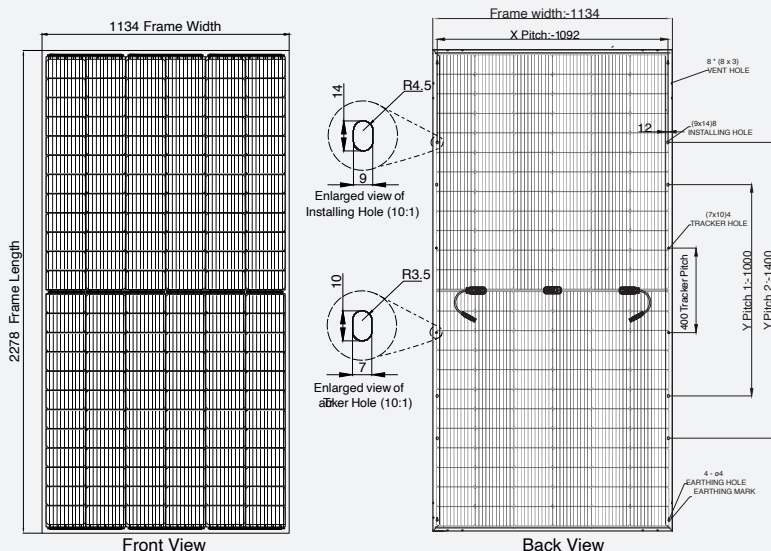

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature -40°C to 85°C / -40F to 185F

Bifaciality 75 % ± 10 %

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.2444 %/K
Current I _{sc}	0.0284 %/K
Output P _{mpp}	-0.3210 %/K

Packaging

Module pieces per pallet	31
Module pieces per HC-container	620

