TICTOC Working Group                              Vinay Shankarkumar
INTERNET DRAFT                                         Laurent Montini
Intended status: Standards Track                      Cisco Systems

                                                         Tim Frost
                                                         Greg Dowd
                                                       Symmetricom

Expires: August 6, 2012                            February 6, 2012


                 Precision Time Protocol Version 2 (PTPv2)
                      Management Information Base
                    draft-ietf-tictoc-ptp-mib-01.txt


Status of this Memo

Copyright Notice

Abstract

   This memo defines a portion of the Management Information Base (MIB)
   for use with network management protocols in TCP/IP-based internets.
   In particular, it defines objects for managing networks using
   Precision Time Protocol.

   This memo specifies a MIB module in a manner that is both compliant
   to the SNMPv2 SMI, and semantically identical to the peer SNMPv1
   definitions.

Table of Contents

1. Introduction

   This memo defines a portion of the Management Information Base (MIB)
   for use with network management protocols in the Internet Community.
   In particular, it describes managed objects used for managing PTP
   devices including the ordinary clock, transparent clock, boundary
   clocks.

   This MIB is restricted to reading standard PTP data elements, as
   described in [IEEE 1588-2008].  It is envisioned this MIB will
   complement other managed objects to be defined to monitor, measure
   the performance of the PTP devices and telecom clocks. Those objects
   are considered out of scope for the current draft.

Similarly, this MIB is read-only and not intended to provide the
ability to configure PTP clocks.  Since PTP clocks are often embedded
in other network elements such as routers, switches and gateways,
this ability is generally provided via the configuration interface
for the network element.

1.1. Relationship to other Profiles and MIBs

This MIB is intended to be used with the default PTP profile
described in [IEEE 1588-2008], and the Telecom Profile described in
[G.8265.1], when running over the IP network layer.  As stated above,
it is envisioned this MIB will complement other managed objects to be
defined to monitor, measure the performance of the PTP devices and
telecom clocks.

Some other PTP profiles have their own MIBs defined as part of the
profile, and this MIB is not intended to replace those MIBs.

1.2. Change Log

This section tracks changes made to the revisions of the Internet
Drafts of this document.  It will be *deleted* when the document is
published as an RFC.   This section tracks changes made to the
visions of the Internet Drafts of this document.  It will be
*deleted* when the document is published as an RFC.

draft-vinay-tictoc-ptp-mib

-00  Mar 11  Initial version; showed structure of MIB

draft-ietf-tictoc-ptp-mib

-00  Jul 11  First full, syntactically correct and compileable MIB
-01  Jan 12  Revised following comments from Bert Wijnen:
             - revised introduction to clarify the scope, and the
               relationship to other MIBs and profiles
             - changed name to "ptpbase"
             - corrected some data types
             - corrected references and typos

2. The SNMP Management Framework

The SNMP Management Framework presently consists of five major
components:

o  An overall architecture, described in STD62, [RFC 3411].

o  Mechanisms for describing and naming objects and events for the
   purpose of management.  The first version of this Structure of

Management Information (SMI) is called SMIv1 and described in
STD 16: [RFC 1155], [RFC 1212] and [RFC 1215].
The second version, called SMIv2, is described in STD 58:
[RFC 2578], [RFC 2579] and [RFC 2580].

o  Message protocols for transferring management information.  The
   first version of the SNMP message protocol is called SNMPv1 and
   described in STD 15 [RFC 1157].  A second version of the SNMP
   message protocol, which is not an Internet standards track
   protocol, is called SNMPv2c and described in [RFC 1901] and
   [RFC 1906].  The third version of the message protocol is called
   SNMPv3 and described in STD62: [RFC 3417], [RFC 3412] and [RFC
   3414].

o  Protocol operations for accessing management information.  The
   first set of protocol operations and associated PDU formats is
   described in STD 15 [RFC 1157].  A second set of protocol
   operations and associated PDU formats is described in STD 62
   [RFC 3416].

o  A set of fundamental applications described in STD 62 [RFC 3413]
   and the view-based access control mechanism described in STD 62
   [RFC 3415].

Managed objects are accessed via a virtual information store, termed
the Management Information Base or MIB.  Objects in the MIB are
defined using the mechanisms defined in the SMI.

This memo specifies a MIB module that is compliant to the SMIv2.  A
MIB conforming to the SMIv1 can be produced through the appropriate
translations.  The resulting translated MIB must be semantically
equivalent, except where objects or events are omitted because no
translation is possible (e.g., use of Counter64).  Some machine
readable information in SMIv2 will be converted into textual
descriptions in SMIv1 during the translation process.  However, this
loss of machine readable information is not considered to change the
semantics of the MIB.

3. Overview

The objects defined in this MIB are to be used when describing the
Precision Time Protocol (PTPv2).

4. IETF PTP MIB Definition

PTPBASE-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Integer32,
    Gauge32,
    Unsigned32,
    Counter32,
    Counter64
        FROM SNMPv2-SMI
    OBJECT-GROUP,
    MODULE-COMPLIANCE
        FROM SNMPv2-CONF
    TEXTUAL-CONVENTION,
    TruthValue,
    DisplayString
        FROM SNMPv2-TC
    InterfaceIndexOrZero
        FROM IF-MIB
    InetAddressType,
    InetAddress
        FROM INET-ADDRESS-MIB;


ptpbaseMIB MODULE-IDENTITY
    LAST-UPDATED    "201201230000Z"
    ORGANIZATION    "TICTOC Working Group"
    CONTACT-INFO
          "WG Email: tictoc@ietf.org

          Vinay Shankarkumar
          Cisco Systems,
          Email: vinays@cisco.com

          Laurent Montini,
          Cisco Systems,
          Email: lmontini@cisco.com

          Tim Frost,
          Symmetricom Inc.,
          Email: tfrost@symmetricom.com

          Greg Dowd,
          Symmetricom Inc.,
          Email: gdowd@symmetricom.com"

DESCRIPTION
        "The MIB module for PTP version 2 (IEEE Std. 1588(TM)-2008)

        Overview of PTP version 2 (IEEE Std. 1588(TM)-2008)

        [IEEE 1588-2008] defines a protocol enabling precise
        synchronization of clocks in measurement and control systems
        implemented with packet-based networks, the Precision Time
        Protocol Version 2 (PTPv2).  This MIB does not address the
        earlier version IEEE Std. 1588(TM)-2002 (PTPv1).  The protocol
        is applicable to network elements communicating using IP.  The
        protocol enables heterogeneous systems that include clocks of
        various inherent precision, resolution, and stability to
        synchronize to a grandmaster clock.

        The protocol supports system-wide synchronization accuracy in
        the sub-microsecond range with minimal network and local clock
        computing resources. [IEEE 1588-2008] uses UDP/IP or
        Ethernet and can be adapted to other mappings. It includes
        formal mechanisms for message extensions, higher sampling rates,
        correction for asymmetry, a clock type to reduce error
        accumulation in large topologies, and specifications on how to
        incorporate the resulting additional data into the
        synchronization protocol. The [IEEE 1588-2008] defines
        conformance and management capability also.

        MIB description

        This MIB is to support the Precision Time Protocol version 2
        (PTPv2, hereafter designated as PTP) features of network element
        system devices, when using the default PTP profile described in
        [IEEE 1588-2008], or the Telecom Profile described in
        [G.8265.1], when running over the IP network layer.

        It is envisioned this MIB will complement other managed objects
        to be defined to monitor, measure the performance of the PTP
        devices and telecom clocks.

        Some other PTP profiles have their own MIBs defined as part of
        the profile, and this MIB is not intended to replace those MIBs.


        Acronyms:
                ARB     Arbitrary Timescale
                E2E     End-to-End
                EUI     Extended Unique Identifier.
                GPS     Global Positioning System
                IANA    Internet Assigned Numbers Authority
                IP      Internet Protocol

                MAC      Media Access Control
                         according to [IEEE 802.3-2008]
                NIST     National Institute of Standards and Technology
                NTP      Network Time Protocol (see IETF [RFC 5905])
                OUI      Organizational Unique Identifier
                         (allocated by the IEEE)
                P2P      Peer-to-Peer
                PTP      Precision Time Protocol
                TAI      International Atomic Time
                TC       Transparent Clock
                UDP      User Datagram Protocol
                UTC      Coordinated Universal Time

          References:
          [IEEE 1588-2008] IEEE Standard for A Precision Clock
               Synchronization Protocol for Networked Measurement and
               Control Systems, IEEE Std. 1588(TM)-2008, 24 July 2008.

          [G.8265.1] Precision Time Protocol Telecom Profile for
               Frequency Synchronization, ITU-T Recommendation G.8265.1,
               October 2010.


          As defined in [IEEE 1588-2008]:

          Accuracy:
          The mean of the time or frequency error between the clock under
          test and a perfect reference clock, over an ensemble of
          measurements.  Stability is a measure of how the mean varies
          with respect to variables such as time, temperature, and so on,
          while the precision is a measure of the deviation of the error
          from the mean.

          Atomic process:
          A process is atomic if the values of all inputs to the process
          are not permitted to change until all of the results of the
          process are instantiated, and the outputs of the process are
          not visible to other processes until the processing of each
          output is complete.

          Boundary clock:
          A clock that has multiple Precision Time Protocol (PTP) ports in
          a domain and maintains the timescale used in the domain.  It
          may serve as the source of time, i.e., be a master clock, and
          may synchronize to another clock, i.e., be a slave clock.

          Boundary node clock:
          A clock that has multiple Precision Time Protocol(PTP) ports in
          a domain and maintains the timescale used in the domain.  It

differs from a boundary clock in that the clock roles can
change.

Clock:
A node participating in the Precision Time Protocol (PTP) that
is capable of providing a measurement of the passage of time
since a defined epoch.

Domain:
A logical grouping of clocks that synchronize to each other
using the protocol, but that are not necessarily synchronized
to clocks in another domain.

End-to-end transparent clock:
A transparent clock that supports the use of the end-to-end
delay measurement mechanism between slave clocks and the master
clock.  Each node must measure the residence time of PTP event
messages and accumulate it in Correction Field.

Epoch:
The origin of a timescale.

Event:
An abstraction of the mechanism by which signals or conditions
are generated and represented.

Foreign master:
An ordinary or boundary clock sending Announce messages to
another clock that is not the current master recognized by the
other clock.

Grandmaster clock:
Within a domain, a clock that is the ultimate source of time
for clock synchronization using the protocol.

Holdover:
A clock previously synchronized/syntonized to another clock
(normally a primary reference or a master clock) but now
free-running based on its own internal oscillator, whose
frequency is being adjusted using data acquired while it had
been synchronized/syntonized to the other clock.  It is said to
be in holdover or in the holdover mode, as long as it is within
its accuracy requirements.

Link:
A network segment between two Precision Time Protocol ports
supporting the peer delay mechanism of this standard.  The peer
delay mechanism is designed to measure the propagation time
over such a link.

Management node:
A device that configures and monitors clocks.

Master clock:
In the context of a single Precision Time Protocol
communication path, a clock that is the source of time to which
all other clocks on that path synchronize.

Message timestamp point:
A point within a Precision Time Protocol event message serving
as a reference point in the message.  A timestamp is defined by
the instant a message timestamp point passes the reference
plane of a clock.

Multicast communication:
A communication model in which each Precision Time Protocol
message sent from any PTP port is capable of being received and
processed by all PTP ports on the same PTP communication path.

Node:
A device that can issue or receive Precision Time Protocol
communications on a network.

One-step clock:
A clock that provides time information using a single event
message.

On-pass support:
Indicates that each node in the synchronization chain from
master to slave can support IEEE-1588.

Ordinary clock:
A clock that has a single Precision Time Protocol port in a
domain and maintains the timescale used in the domain.  It may
serve as a source of time, i.e., be a master clock, or may
synchronize to another clock, i.e., be a slave clock.

Parent clock:
The master clock to which a clock is synchronized.

Peer-to-peer transparent clock:
A transparent clock that, in addition to providing Precision
Time Protocol event transit time information, also provides
corrections for the propagation delay of the link connected to
the port receiving the PTP event message.  In the presence of
peer-to-peer transparent clocks, delay measurements between
slave clocks and the master clock are performed using the
peer-to-peer delay measurement mechanism.

Phase change rate:
The observed rate of change in the measured time with respect
to the reference time.  The phase change rate is equal to the
fractional frequency offset between the measured frequency and
the reference frequency.

PortNumber:
An index identifying a specific Precision Time Protocol port on
a PTP node.

Primary reference:
A source of time and or frequency that is traceable to
international standards.

Profile:
The set of allowed Precision Time Protocol features applicable
to a device.

Precision Time Protocol communication:
Information used in the operation of the protocol, transmitted
in a PTP message over a PTP communication path.

Precision Time Protocol communication path:
The signaling path portion of a particular network enabling
direct communication among ordinary and boundary clocks.

Precision Time Protocol node:
PTP ordinary, boundary, or transparent clock or a device that
generates or parses PTP messages.

Precision Time Protocol port:
A logical access point of a clock for PTP communications to the
communications network.

Recognized standard time source:
A recognized standard time source is a source external to
Precision Time Protocol that provides time and/or frequency as
appropriate that is traceable to the international standards
laboratories maintaining clocks that form the basis for the
International Atomic Time and Universal Coordinated Time
timescales.  Examples of these are GPS, NTP, and NIST
timeservers.

Requestor:
The port implementing the peer-to-peer delay mechanism that
initiates the mechanism by sending a Pdelay_Req message.

Responder:

The port responding to the receipt of a Pdelay_Req message as
part of the operation of the peer-to-peer delay mechanism.

Synchronized clocks:
Two clocks are synchronized to a specified uncertainty if they
have the same epoch and their measurements of the time of a
single event at an arbitrary time differ by no more than that
uncertainty.

Syntonized clocks:
Two clocks are syntonized if the duration of the second is the
same on both, which means the time as measured by each advances
at the same rate. They may or may not share the same epoch.

Timeout:
A mechanism for terminating requested activity that, at least
from the requester's perspective, does not complete within the
specified time.

Timescale:
A linear measure of time from an epoch.

Traceability:
A property of the result of a measurement or the value of a
standard whereby it can be related to stated references,
usually national or international standards, through an
unbroken chain of comparisons all having stated uncertainties.

Translation device:
A boundary clock or, in some cases, a transparent clock that
translates the protocol messages between regions implementing
different transport and messaging protocols, between different
versions of [IEEE 1588-2008], or different PTP profiles.

Transparent clock:
A device that measures the time taken for a Precision Time
Protocol event message to transit the device and provides this
information to clocks receiving this PTP event message.

Two-step clock:
A clock that provides time information using the combination of
an event message and a subsequent general message.

The below table specifies the object formats of the various
textual conventions used.

| Data type mapping | Textual Convention | SYNTAX |
| --- | --- | --- |
| 5.3.2 TimeInterval | ClockTimeInterval | OCTET STRING(SIZE(1..255)) |

```
     5.3.3 Timestamp     ClockTimestamp     OCTET STRING(SIZE(6))
     5.3.4 ClockIdentity ClockIdentity      OCTET STRING(SIZE(1..255))
     5.3.5 PortIdentity  ClockPortNumber    INTEGER(1..65535)
     5.3.7 ClockQuality  ClockQualityClassType
```

Simple master-slave hierarchy, section 6.6.2.4 [IEEE 1588-2008]:

```
              +---------------+
              |   Ordinary    |
              |   Clock -1    |
              | (GrandMaster) |
              +-------M-------+
                      |
                      1
                      |
     +----------------S----------------+
     |              Boundary           |
     |              Clock -1           |
     +-----M--------------------M-----+
           |                    |
           2                    3
           |                    |
     +-----S-----+  +-----------S------------+
     | Ordinary  |  |        Boundary        |
     | Clock -2  |  |        Clock -2        |
     +-----------+  +-----M-------------M-----+
                          |             |
                          4             5
                          |             |
                    +-----S-----+ +-----S-----+
                    | Ordinary  | | Ordinary  |
                    | Clock -3  | | Clock -4  |
                    +-----------+ +-----------+
```
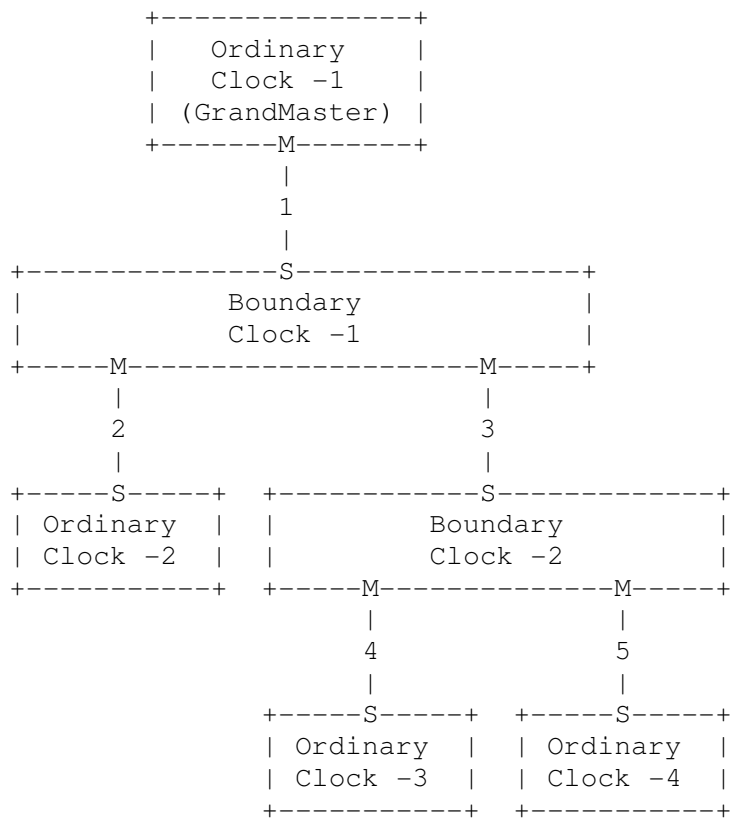
     Grandmaster

     Boundary Clock(0-N)   Ordinary Clocks(0-N)
     Ordinary Clocks(0-N)


     Relationship cardinality:
       PTP system 1 : N PTP Clocks
       PTP Clock  1 : 1 Domain
       PTP Clock  1 : N PTP Ports
       PTP Ports  N : M Physical Ports (interface in IF-MIB)

     Transparent clock diagram, section 6.7.1.3 of [IEEE 1588-2008]:

```
                    +-----------------------------+
                    |      Boundary clock - 1      |
                    +-----------------------------+
                      |                        |
                      |                        |
              +-- A --+                        B
              |                                |
      +--------------------+                   |
      |  Ordinary clock    |                   |
      +--------------------+                   |
                                  +----------------------+
      +--------------------+      |      End-to-end      |
      |  Ordinary clock 1-1 |----------| transparent clock- |
      +--------------------+      |        1 - 1         |
                                  +----------------------+
                                             |
                                             C
                                             |
                                  +----------------------+
      +----------------------+    |      End-to-end      |
      |  Ordinary clock 1-2  |----------| transparent clock- |
      +----------------------+    |        1 - 2         |
                                  +----------------------+
```
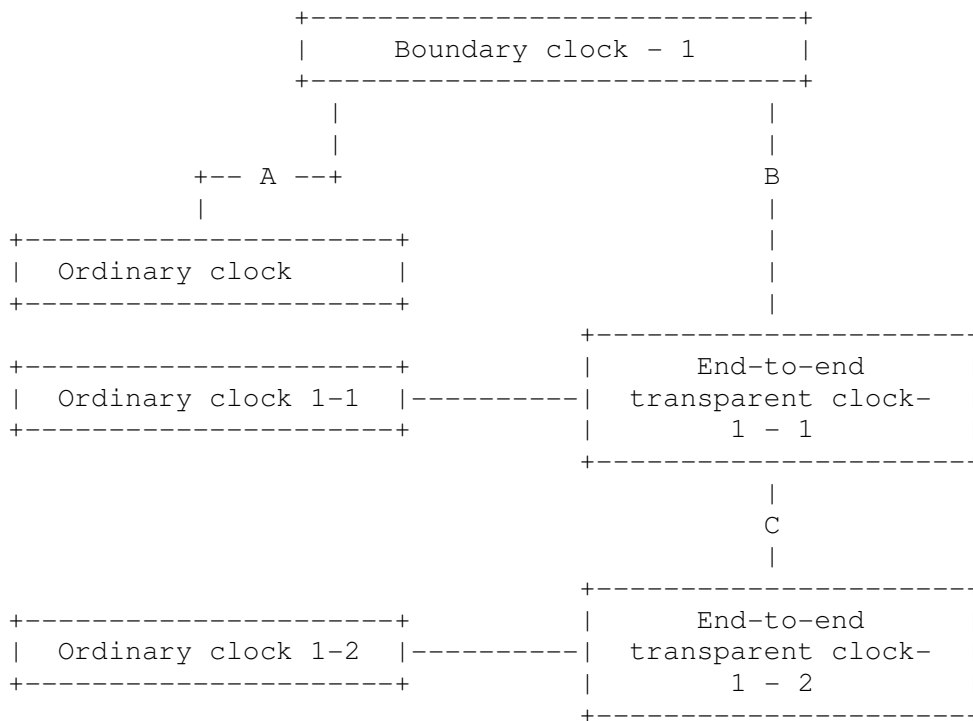
The MIB refers to the sections of [IEEE 1588-2008]."

-- revision log

::= { mib-2 XXX }_-- XXX to be assigned by IANA


ClockDomainType ::= TEXTUAL-CONVENTION
    DISPLAY-HINT    "d"
    STATUS          current
    DESCRIPTION
        "The Domain is identified by an integer, the domainNumber, in
        the range of 0 to 255. An integer value that is used to assign
        each PTP device to a particular domain. The following values
        define the valid domains.

            Value       Definition
            ---------   ------------------
            0           Default domain
            1           Alternate domain 1
            2           Alternate domain 2
            3           Alternate domain 3
            4 - 127     User-defined domains

```
              128 - 255   Reserved"

   REFERENCE     "Section 7.1 Domains, Table 2 of [IEEE 1588-2008]"
   SYNTAX        Unsigned32 (0..255)

ClockIdentity ::= TEXTUAL-CONVENTION
   STATUS          current
   DESCRIPTION
      "The clock Identity is an 8-octet array and will be presented in
      the form of a character array. The value of the
      ClockIdentity should be taken from the IEEE EUI-64 individual
      assigned numbers as indicated in Section 7.5.2.2.2 of
      [IEEE 1588-2008].  The EUI-64 address is divided into the
      following fields:

          OUI bytes (0-2)
          Extension identifier bytes (3-7)

      The clock identifier can be constructed from existing EUI-48
      assignments and here is an abbreviated example extracted from
      section 7.5.2.2.2 [IEEE 1588-2008].

          Company EUI-48 = 0xACDE4823456716
          EUI-64 = ACDE48FFFE23456716

      It is important to note the IEEE Registration Authority has
      deprecated the use of MAC-48 in any new design."

   REFERENCE       "Section 7.5.2.2.1 of [IEEE 1588-2008]"
   SYNTAX          OCTET STRING (SIZE (1..255))

ClockIntervalBase2 ::= TEXTUAL-CONVENTION
   DISPLAY-HINT    "d"
   STATUS          current
   DESCRIPTION
      "The interval included in message types Announce, Sync,
      Delay_Req, and Pdelay_Req as indicated in section 7.7.2.1 of
      [IEEE 1588-2008].

      The mean time interval between successive messages shall be
      represented as the logarithm to the base 2 of this time
      interval measured in seconds on the local clock of the device
      sending the message. The values of these logarithmic attributes
      shall be selected from integers in the range -128 to 127 subject
      to further limits established in an applicable PTP profile."

   REFERENCE    "Section 7.7.2.1 General interval specification of
                [IEEE 1588-2008]"
   SYNTAX       Integer32 (-128..127)
```

ClockMechanismType ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "The clock type based on whether End to End or peer to peer
        mechanisms are used. The mechanism used to calculate the Mean
        Path Delay as indicated in Table 9 of [IEEE 1588-2008].

        Delay mechanism    Value(hex)  Specification
        ---------------    ----------  -------------
        E2E                   01        The port is configured to use the
                                        delay request-response mechanism.
        P2P                   02        The port is configured to use the
                                        peer delay mechanism.
        DISABLED              FE        The port does not implement the
                                        delay mechanism."

    REFERENCE    "Sections 8.2.5.4.4, 6.6.4, 7.4.2 of [IEEE 1588-2008]."
    SYNTAX       INTEGER {
                    e2e(1),
                    p2p(2),
                    disabled(254)
                    }

ClockInstanceType ::= TEXTUAL-CONVENTION
    DISPLAY-HINT    "d"
    STATUS          current
    DESCRIPTION
        "The instance of the Clock of a given clock type in a given
        domain."
    SYNTAX          Unsigned32 (0..255)

ClockPortNumber ::= TEXTUAL-CONVENTION
    DISPLAY-HINT    "d"
    STATUS          current
    DESCRIPTION
        "An index identifying a specific Precision Time Protocol (PTP)
        port on a PTP node."

    REFERENCE    "Sections 7.5.2.3 and 5.3.5 of [IEEE 1588-2008]"
    SYNTAX       Unsigned32 (0..65535)

ClockPortState ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "This is the value of the current state of the protocol engine
        associated with this port.
        Port state        Value      Description
        -----------------------------------------------------------

```
        initializing     1         In this state a port initializes
                                   its data sets, hardware, and
                                   communication facilities.
        faulty           2         The fault state of the protocol.
        disabled         3         The port shall not place any
                                   messages on its communication path.
        listening        4         The port is waiting for the
                                   announceReceiptTimeout to expire or
                                   to receive an Announce message from
                                   a master.
        preMaster        5         The port shall behave in all respects
                                   as though it were in the MASTER state
                                   except that it shall not place any
                                   messages on its communication path
                                   except for Pdelay_Req, Pdelay_Resp,
                                   Pdelay_Resp_Follow_Up, signaling, or
                                   management messages.
        master           6         The port is behaving as a master port.
        passive          7         The port shall not place any messages
                                   on its communication path except for
                                   Pdelay_Req, Pdelay_Resp,
                                   Pdelay_Resp_Follow_Up, or signaling
                                   messages, or management messages that
                                   are a required response to another
                                   management message
        uncalibrated     8         The local port is preparing to
                                   synchronize to the master port.
        slave            9         The port is synchronizing to the
                                   selected master port."

    REFERENCE         "Section 8.2.5.3.1 portState and 9.2.5 of
                       [IEEE 1588-2008]"
    SYNTAX            INTEGER  {
                         initializing(1),
                         faulty(2),
                         disabled(3),
                         listening(4),
                         preMaster(5),
                         master(6),
                         passive(7),
                         uncalibrated(8),
                         slave(9)
                      }

ClockProfileType ::= TEXTUAL-CONVENTION
    STATUS           current
    DESCRIPTION
        "Clock Profile used. A profile is the set of allowed Precision
        Time Protocol (PTP) features applicable to a device."
```

```
     REFERENCE            "Section 3.1.30 and 19.3 PTP profiles of
                          [IEEE 1588-2008]"
     SYNTAX               INTEGER  {
                             default(1),
                             telecom(2),
                             vendorspecific(3)
                          }

ClockQualityAccuracyType ::= TEXTUAL-CONVENTION
     STATUS               current
     DESCRIPTION
         "The ClockQuality as specified in section 5.3.7, 7.6.2.5 and
         Table 6 of [IEEE 1588-2008].

         The following values are not represented in the enumerated
         values.

                 0x01-0x1F Reserved
                 0x32-0x7F Reserved

         It is important to note that section 7.1.1 RFC2578 allows for
         gaps and enumerate values to start with zero when indicated by
         the protocol."

     REFERENCE            "Section 5.3.7, 7.6.2.5 and Table 6 of
                          [IEEE 1588-2008]"
     SYNTAX               INTEGER  {
                             reserved00(1),          -- 0
                             nanoSecond25(32),     -- 0x20
                             nanoSecond100(33),    -- 0x21
                             nanoSecond250(34),    -- 0x22
                             microSec1(35),        -- 0x23
                             microSec2dot5(36),    -- 0x24
                             microSec10(37),       -- 0x25
                             microSec25(38),       -- 0x26
                             microSec100(39),      -- 0x27
                             microSec250(40),      -- 0x28
                             milliSec1(41),        -- 0x29
                             milliSec2dot5(42),    -- 0x2A
                             milliSec10(43),       -- 0x2B
                             milliSec25(44),       -- 0x2C
                             milliSec100(45),      -- 0x2D
                             milliSec250(46),      -- 0x2E
                             second1(47),          -- 0x2F
                             second10(48),         -- 0x30
                             secondGreater10(49),  -- 0x31
                             unknown(254),         -- 0xFE
                             reserved255(255)      -- 0xFF
```

```
                 }

ClockQualityClassType ::= TEXTUAL-CONVENTION
    DISPLAY-HINT     "d"
    STATUS           current
    DESCRIPTION
        "The ClockQuality as specified in section 5.3.7, 7.6.2.4 and
        Table 5 of [IEEE 1588-2008].

        Value     Description
        --------  ------------------------------------------------
              0   Reserved to enable compatibility with future
                  versions.
            1-5   Reserved
              6   Shall designate a clock that is synchronized
                  to a primary reference time source.  The
                  timescale distributed shall be PTP.  A
                  clockClass 6 clock shall not be a slave to
                  another clock in the domain.
              7   Shall designate a clock that has previously
                  been designated as clockClass 6 but that has
                  lost the ability to synchronize to a primary
                  reference time source and is in holdover mode
                  and within holdover specifications. The
                  timescale distributed shall be PTP.  A
                  clockClass 7 clock shall not be a slave to
                  another clock in the domain.
              8   Reserved.
           9-10   Reserved to enable compatibility with future
                  versions.
          11-12   Reserved.
             13   Shall designate a clock that is synchronized
                  to an application-specific source of time.
                  The timescale distributed shall be ARB.  A
                  clockClass 13 clock shall not be a slave to
                  another clock in the domain.
             14   Shall designate a clock that has previously
                  been designated as clockClass 13 but that
                  has lost the ability to synchronize to an
                  application-specific source of time and is
                  in holdover mode and within holdover
                  specifications. The timescale distributed
                  shall be ARB.  A clockClass 14 clock shall
                  not be a slave to another clock in the domain.
          15-51   Reserved.
             52   Degradation alternative A for a clock of
                  clockClass 7 that is not within holdover
                  specification.  A clock of clockClass 52
                  shall not be a slave to another clock in
```

```
                  the domain.
        53-57  Reserved.
           58  Degradation alternative A for a clock of
                  clockClass 14 that is not within holdover
                  specification. A clock of clockClass 58 shall
                  not be a slave to another clock in the domain.
        59-67  Reserved.
       68-122  For use by alternate PTP profiles.
      123-127  Reserved.
      128-132  Reserved.
      133-170  For use by alternate PTP profiles.
      171-186  Reserved.

          187  Degradation alternative B for a clock of
                  clockClass 7 that is not within holdover
                  specification. A clock of clockClass 187 may
                  be a slave to another clock in the domain.
      188-192  Reserved.
          193  Degradation alternative B for a clock of
                  clockClass 14 that is not within holdover
                  specification. A clock of clockClass 193 may
                  be a slave to another clock in the domain.
      194-215  Reserved.
      216-232  For use by alternate PTP profiles.
      233-247  Reserved.
          248  Default. This clockClass shall be used if
                  none of the other clockClass definitions apply.
      249-250  Reserved.
          251  Reserved for version 1 compatibility; see Clause 18.
      252-254  Reserved.
          255  Shall be the clockClass of a slave-only clock; see
                  9.2.2."

    REFERENCE        "Section 5.3.7, 7.6.2.4 and Table 5 of
                      [IEEE 1588-2008]."
    SYNTAX           Unsigned32 (0..255)

ClockRoleType ::= TEXTUAL-CONVENTION
    STATUS           current
    DESCRIPTION
        "The Clock Role. The protocol generates a Master Slave
        relationship among the clocks in the system.

        Clock Role      Value      Description
        ---------------------------------------------------------------
        Master clock     1         A clock that is the source of
                                   time to which all other clocks on
                                   that path synchronize.
```

```
     Slave clock      2         A clock which synchronizes to
                                another clock (master)."
    SYNTAX          INTEGER  {
                       master(1),
                       slave(2)
                    }

ClockStateType ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "The clock state returned by PTP engine.

        Clock State      Value   Description
        ----------------------------------------------------------
        Freerun state      1     Applies to a slave device that is not
                                 locked to a master. This is the initial
                                 state a slave starts out with when it
                                 is not getting any PTP packets from the
                                 master or because of some other input
                                 error (erroneous packets, etc).

        Holdover state     2  In this state the slave device is
                                 locked to a master but communication
                                 with the master is lost or the
                                 timestamps in the ptp packets are
                                 incorrect. But since the slave was
                                 locked to the master, it can run with
                                 the same accuracy for sometime. The
                                 slave can continue to operate in this
                                 state for some time. If communication
                                 with the master is not restored for a
                                 while, the device is moved to the
                                 FREERUN state.

        Acquiring state    3     The slave device is receiving packets
                                 from a master and is trying to acquire
                                 a lock.

        Freq_locked state  4  Slave device is locked to the Master
                                 with respect to frequency, but not phase
                                 aligned

        Phase_aligned state 5  Locked to the master with respect to
                                 frequency and phase."
    SYNTAX          INTEGER  {
                       freerun(1),
                       holdover(2),
                       acquiring(3),
                       frequencyLocked(4),
```

```
                        phaseAligned(5)
                    }

ClockTimeSourceType ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "The ClockQuality as specified in section 5.3.7, 7.6.2.6 and
        Table 7 of [IEEE 1588-2008].

        The following values are not represented in the enumerated
        values.

        0xF0-0xFE  For use by alternate PTP profiles
        0xFF       Reserved

        It is important to note that section 7.1.1 RFC2578 allows for
        gaps and enumerate values to start with zero when indicated by
        the protocol."

    REFERENCE       "Section 5.3.7, 7.6.2.6 and Table 7 of
                     [IEEE 1588-2008]."
    SYNTAX          INTEGER  {
                        atomicClock(16), -- 0x10
                        gps(32), -- 0x20
                        terrestrialRadio(48), -- 0x22
                        ptp(64), -- 0x40
                        ntp(80), -- 0x50
                        handSet(96), -- 0x60
                        other(144), -- 0x90
                        internalOsillator(160) -- 0xA0
                    }

ClockTimeInterval ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "This textual convention corresponds to the TimeInterval
        structure indicated in section 5.3.2 of [IEEE 1588-2008].
        It will be presented in the form of a character array.

        The TimeInterval type represents time intervals.

            struct TimeInterval
            {
                Integer64 scaledNanoseconds;
            };

        The scaledNanoseconds member is the time interval expressed in
        units of nanoseconds and multiplied by 2**16.
```

        Positive or negative time intervals outside the maximum range
        of this data type shall be encoded as the largest positive and
        negative values of the data type, respectively.

        For example, 2.5 ns is expressed as 0000 0000 0002 8000 in
        Base16."

    REFERENCE
        "Section 5.3.2 and setion 7.7.2.1 Timer interval
         specification of [IEEE 1588-2008]"
    SYNTAX          OCTET STRING (SIZE (1..255))

ClockTxModeType ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "Transmission mode.

        unicast. Using unicast communication channel.

        multicast. Using Multicast communication channel.

        multicast-mix. Using multicast-unicast communication channel"
    SYNTAX          INTEGER  {
                        unicast(1),
                        multicast(2),
                        multicastmix(3)
                    }

ClockType ::= TEXTUAL-CONVENTION
    STATUS          current
    DESCRIPTION
        "The clock types as defined in the MIB module description."

    REFERENCE       "Section 6.5.1 of [IEEE 1588-2008]."
    SYNTAX          INTEGER  {
                        ordinaryClock(1),
                        boundaryClock(2),
                        transparentClock(3),
                        boundaryNode(4)
                    }
ptpbaseMIBNotifs  OBJECT IDENTIFIER
    ::= { ptpbaseMIB 0 }

ptpbaseMIBObjects  OBJECT IDENTIFIER
    ::= { ptpbaseMIB 1 }

ptpbaseMIBConformance  OBJECT IDENTIFIER
    ::= { ptpbaseMIB 2 }

```
ptpbaseMIBSystemInfo  OBJECT IDENTIFIER
    ::= { ptpbaseMIBObjects 1 }

-- Conformance Information Definition

ptpbaseMIBCompliances  OBJECT IDENTIFIER
    ::= { ptpbaseMIBConformance 1 }

ptpbaseMIBGroups  OBJECT IDENTIFIER
    ::= { ptpbaseMIBConformance 2 }


ptpbaseMIBCompliances1 MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "Compliance statement for agents that provide read-only support
        for PTPBASE-MIB. Such devices can only be monitored using this
        MIB module.

        The Module is implemented with support for read-only. In other
        words, only monitoring is available by implementing this
        MODULE-COMPLIANCE."
    MODULE          -- this module
    MANDATORY-GROUPS { ptpbaseMIBSystemInfoGroup }
    ::= { ptpbaseMIBCompliances 1 }

ptpbaseMIBCompliances2 MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "Compliance statement for agents that provide read-only support
        for PTPBASE-MIB. Such devices can only be monitored using this
        MIB module.

        The Module is implemented with support for read-only. In other
        words, only monitoring is available by implementing this
        MODULE-COMPLIANCE."
    MODULE          -- this module
    MANDATORY-GROUPS {
                    ptpbaseMIBClockCurrentDSGroup,
                    ptpbaseMIBClockParentDSGroup,
                    ptpbaseMIBClockDefaultDSGroup,
                    ptpbaseMIBClockRunningGroup,
                    ptpbaseMIBClockTimepropertiesGroup
                }
    ::= { ptpbaseMIBCompliances 2 }

ptpbaseMIBCompliances3 MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
```

```
        "Compliance statement for agents that provide read-only support
        for PTPBASE-MIB. Such devices can only be monitored using this
        MIB module.

        The Module is implemented with support for read-only. In other
        words, only monitoring is available by implementing this
        MODULE-COMPLIANCE."
    MODULE          -- this module
    MANDATORY-GROUPS {
                    ptpbaseMIBClockPortGroup,
                    ptpbaseMIBClockPortDSGroup,
                    ptpbaseMIBClockPortRunningGroup,
                    ptpbaseMIBClockPortAssociateGroup
                }
    ::= { ptpbaseMIBCompliances 3 }

ptpbaseMIBCompliances4 MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "Compliance statement for agents that provide read-only support
        for PTPBASE-MIB. Such devices can only be monitored using this
        MIB module.

        The Module is implemented with support for read-only. In other
        words, only monitoring is available by implementing this
        MODULE-COMPLIANCE."
    MODULE          -- this module
    MANDATORY-GROUPS {
                    ptpbaseMIBClockTranparentDSGroup,
                    ptpbaseMIBClockPortTransDSGroup
                }
    ::= { ptpbaseMIBCompliances 4 }

ptpbaseMIBSystemInfoGroup OBJECT-GROUP
    OBJECTS         {
                    ptpbaseSystemDomainTotals,
                    ptpDomainClockPortsTotal,
                    ptpbaseSystemProfile
                }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing system-wide
        information"
    ::= { ptpbaseMIBGroups 1 }

ptpbaseMIBClockCurrentDSGroup OBJECT-GROUP
    OBJECTS         {
                    ptpbaseClockCurrentDSStepsRemoved,
                    ptpbaseClockCurrentDSOffsetFromMaster,
```

```
                        ptpbaseClockCurrentDSMeanPathDelay
                    }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP Current Dataset
        information"
    ::= { ptpbaseMIBGroups 2 }

ptpbaseMIBClockParentDSGroup OBJECT-GROUP
    OBJECTS        {
                        ptpbaseClockParentDSParentPortIdentity,
                        ptpbaseClockParentDSParentStats,
                        ptpbaseClockParentDSOffset,
                        ptpbaseClockParentDSClockPhChRate,
                        ptpbaseClockParentDSGMClockIdentity,
                        ptpbaseClockParentDSGMClockPriority1,
                        ptpbaseClockParentDSGMClockPriority2,
                        ptpbaseClockParentDSGMClockQualityClass,
                        ptpbaseClockParentDSGMClockQualityAccuracy,
                        ptpbaseClockParentDSGMClockQualityOffset
                    }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP Parent Dataset
        information"
    ::= { ptpbaseMIBGroups 3 }

ptpbaseMIBClockDefaultDSGroup OBJECT-GROUP
    OBJECTS        {
                        ptpbaseClockDefaultDSTwoStepFlag,
                        ptpbaseClockDefaultDSClockIdentity,
                        ptpbaseClockDefaultDSPriority1,
                        ptpbaseClockDefaultDSPriority2,
                        ptpbaseClockDefaultDSSlaveOnly,
                        ptpbaseClockDefaultDSQualityClass,
                        ptpbaseClockDefaultDSQualityAccuracy,
                        ptpbaseClockDefaultDSQualityOffset
                    }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP Default Dataset
        information"
    ::= { ptpbaseMIBGroups 4 }

ptpbaseMIBClockRunningGroup OBJECT-GROUP
    OBJECTS        {
                        ptpbaseClockRunningState,
                        ptpbaseClockRunningPacketsSent,
                        ptpbaseClockRunningPacketsReceived
```

```
                    }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP running state
        information"
    ::= { ptpbaseMIBGroups 5 }

ptpbaseMIBClockTimepropertiesGroup OBJECT-GROUP
    OBJECTS   {
                ptpbaseClockTimePropertiesDSCurrentUTCOffsetValid,
                ptpbaseClockTimePropertiesDSCurrentUTCOffset,
                ptpbaseClockTimePropertiesDSLeap59,
                ptpbaseClockTimePropertiesDSLeap61,
                ptpbaseClockTimePropertiesDSTimeTraceable,
                ptpbaseClockTimePropertiesDSFreqTraceable,
                ptpbaseClockTimePropertiesDSPTPTimescale,
                ptpbaseClockTimePropertiesDSSource
              }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP Time Properties
        information"
    ::= { ptpbaseMIBGroups 6 }

ptpbaseMIBClockTranparentDSGroup OBJECT-GROUP
    OBJECTS          {
                        ptpbaseClockTransDefaultDSClockIdentity,
                        ptpbaseClockTransDefaultDSNumOfPorts,
                        ptpbaseClockTransDefaultDSDelay,
                        ptpbaseClockTransDefaultDSPrimaryDomain
                     }
    STATUS          current
    DESCRIPTION
        "Group which aggregates objects describing PTP Transparent
        Dataset
        information"
    ::= { ptpbaseMIBGroups 7 }

ptpbaseMIBClockPortGroup OBJECT-GROUP
    OBJECTS          {
                        ptpbaseClockPortName,
                        ptpbaseClockPortSyncOneStep,
                        ptpbaseClockPortCurrentPeerAddress,
                        ptpbaseClockPortNumOfAssociatedPorts,
                        ptpbaseClockPortCurrentPeerAddressType,
                        ptpbaseClockPortRole
                     }
    STATUS          current
    DESCRIPTION
```

        "Group which aggregates objects describing information for a
        given PTP Port."
     ::= { ptpbaseMIBGroups 8 }

ptpbaseMIBClockPortDSGroup OBJECT-GROUP
     OBJECTS          {
                         ptpbaseClockPortDSName,
                         ptpbaseClockPortDSPortIdentity,
                         ptpbaseClockPortDSAnnouncementInterval,
                         ptpbaseClockPortDSAnnounceRctTimeout,
                         ptpbaseClockPortDSSyncInterval,
                         ptpbaseClockPortDSMinDelayReqInterval,
                         ptpbaseClockPortDSPeerDelayReqInterval,
                         ptpbaseClockPortDSDelayMech,
                         ptpbaseClockPortDSPeerMeanPathDelay,
                         ptpbaseClockPortDSGrantDuration,
                         ptpbaseClockPortDSPTPVersion
                      }
     STATUS           current
     DESCRIPTION
        "Group which aggregates objects describing PTP Port Dataset
        information"
     ::= { ptpbaseMIBGroups 9 }

ptpbaseMIBClockPortRunningGroup OBJECT-GROUP
     OBJECTS          {
                         ptpbaseClockPortRunningName,
                         ptpbaseClockPortRunningState,
                         ptpbaseClockPortRunningRole,
                         ptpbaseClockPortRunningInterfaceIndex,
                         ptpbaseClockPortRunningIPversion,
                         ptpbaseClockPortRunningEncapsulationType,
                         ptpbaseClockPortRunningTxMode,
                         ptpbaseClockPortRunningRxMode,
                         ptpbaseClockPortRunningPacketsReceived,
                         ptpbaseClockPortRunningPacketsSent
                      }
     STATUS           current
     DESCRIPTION
        "Group which aggregates objects describing PTP running interface
        information"
     ::= { ptpbaseMIBGroups 10 }

ptpbaseMIBClockPortTransDSGroup OBJECT-GROUP
     OBJECTS          {
                         ptpbaseClockPortTransDSPortIdentity,
                         ptpbaseClockPortTransDSlogMinPdelayReqInt,
                         ptpbaseClockPortTransDSFaultyFlag,
                         ptpbaseClockPortTransDSPeerMeanPathDelay

```
                       }
    STATUS             current
    DESCRIPTION
        "Group which aggregates objects describing PTP TransparentDS
        Dataset
        information"
    ::= { ptpbaseMIBGroups 11 }

ptpbaseMIBClockPortAssociateGroup OBJECT-GROUP
    OBJECTS            {
                        ptpbaseClockPortAssociatePacketsSent,
                        ptpbaseClockPortAssociatePacketsReceived,
                        ptpbaseClockPortAssociateAddress,
                        ptpbaseClockPortAssociateAddressType,
                        ptpbaseClockPortAssociateInErrors,
                        ptpbaseClockPortAssociateOutErrors
                       }
    STATUS             current
    DESCRIPTION
        "Group which aggregates objects describing information on peer
        PTP ports for a given PTP clock-port."
    ::= { ptpbaseMIBGroups 12 }
ptpbaseMIBClockInfo  OBJECT IDENTIFIER
    ::= { ptpbaseMIBObjects 2 }


ptpbaseSystemTable OBJECT-TYPE
    SYNTAX             SEQUENCE OF PtpbaseSystemEntry
    MAX-ACCESS         not-accessible
    STATUS             current
    DESCRIPTION
        "Table of count information about the PTP system for all
        domains."
    ::= { ptpbaseMIBSystemInfo 1 }

ptpbaseSystemEntry OBJECT-TYPE
    SYNTAX             PtpbaseSystemEntry
    MAX-ACCESS         not-accessible
    STATUS             current
    DESCRIPTION
        "An entry in the table, containing count information about a
        single domain. New row entries are added when the PTP clock for
        this domain is configured, while the unconfiguration of the PTP
        clock removes it."
    INDEX              {
                        ptpDomainIndex,
                        ptpInstanceIndex
                       }
    ::= { ptpbaseSystemTable 1 }
```

```
PtpbaseSystemEntry ::= SEQUENCE {
      ptpDomainIndex          ClockDomainType,
      ptpInstanceIndex        ClockInstanceType,
      ptpDomainClockPortsTotal Gauge32
}

ptpDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices. The Clock Domain is a logical group of
        clocks and devices that synchronize with each other using the
        PTP protocol.

        0          Default domain
        1          Alternate domain 1
        2          Alternate domain 2
        3          Alternate domain 3
        4 - 127    User-defined domains
        128 - 255  Reserved"
    ::= { ptpbaseSystemEntry 1 }

ptpInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the Clock for this
        domain."
    ::= { ptpbaseSystemEntry 2 }

ptpDomainClockPortsTotal OBJECT-TYPE
    SYNTAX          Gauge32
    UNITS           "ptp ports"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the total number of clock ports
        configured within a domain."
    ::= { ptpbaseSystemEntry 3 }



ptpbaseSystemDomainTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseSystemDomainEntry
    MAX-ACCESS      not-accessible
```

```
    STATUS           current
    DESCRIPTION
        "Table of information about the PTP system for all clock modes
        -- ordinary, boundary or transparent."
    ::= { ptpbaseMIBSystemInfo 2 }

ptpbaseSystemDomainEntry OBJECT-TYPE
    SYNTAX           PtpbaseSystemDomainEntry
    MAX-ACCESS       not-accessible
    STATUS           current
    DESCRIPTION
        "An entry in the table, containing information about a single
        clock mode for the PTP system. A row entry gets added when PTP
        clocks are configured on the router."
    INDEX           { ptpbaseSystemDomainClockTypeIndex }
    ::= { ptpbaseSystemDomainTable 1 }

PtpbaseSystemDomainEntry ::= SEQUENCE {
        ptpbaseSystemDomainClockTypeIndex ClockType,
        ptpbaseSystemDomainTotals        Unsigned32
}

ptpbaseSystemDomainClockTypeIndex OBJECT-TYPE
    SYNTAX           ClockType
    MAX-ACCESS       not-accessible
    STATUS           current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseSystemDomainEntry 1 }

ptpbaseSystemDomainTotals OBJECT-TYPE
    SYNTAX           Unsigned32
    UNITS            "domains"
    MAX-ACCESS       read-only
    STATUS           current
    DESCRIPTION
        "This object specifies the total number of PTP domains for this
        particular clock type configured in this node."
    ::= { ptpbaseSystemDomainEntry 2 }



ptpbaseSystemProfile OBJECT-TYPE
    SYNTAX           ClockProfileType
    MAX-ACCESS       read-only
    STATUS           current
    DESCRIPTION
        "This object specifies the PTP Profile implemented on the
```

```
        system."
    REFERENCE        "Section 19.3 PTP profiles of [IEEE 1588-2008]"
    ::= { ptpbaseMIBSystemInfo 3 }

ptpbaseClockCurrentDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockCurrentDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Current Datasets for
        all domains."
    ::= { ptpbaseMIBClockInfo 1 }

ptpbaseClockCurrentDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockCurrentDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock Current Datasets for a domain."
    REFERENCE
        "1588 Version 2.0 Section 8.2.2 currentDS data set member
        specifications of [IEEE 1588-2008]"
    INDEX           {
                        ptpbaseClockCurrentDSDomainIndex,
                        ptpbaseClockCurrentDSClockTypeIndex,
                        ptpbaseClockCurrentDSInstanceIndex
                    }
    ::= { ptpbaseClockCurrentDSTable 1 }

PtpbaseClockCurrentDSEntry ::= SEQUENCE {
        ptpbaseClockCurrentDSDomainIndex      ClockDomainType,
        ptpbaseClockCurrentDSClockTypeIndex   ClockType,
        ptpbaseClockCurrentDSInstanceIndex    ClockInstanceType,
        ptpbaseClockCurrentDSStepsRemoved     Unsigned32,
        ptpbaseClockCurrentDSOffsetFromMaster ClockTimeInterval,
        ptpbaseClockCurrentDSMeanPathDelay    ClockTimeInterval
}

ptpbaseClockCurrentDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockCurrentDSEntry 1 }

ptpbaseClockCurrentDSClockTypeIndex OBJECT-TYPE
```

```
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockCurrentDSEntry 2 }

ptpbaseClockCurrentDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockCurrentDSEntry 3 }

ptpbaseClockCurrentDSStepsRemoved OBJECT-TYPE
    SYNTAX          Unsigned32
    UNITS           "Steps"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "The current clock dataset StepsRemoved value.

        This object specifies the distance measured by the number of
        Boundary clocks between the local clock and the Foreign master
        as indicated in the stepsRemoved field of Announce messages."
    REFERENCE       "1588 Version 2.0 Section 8.2.2.2 stepsRemoved"
    ::= { ptpbaseClockCurrentDSEntry 4 }

ptpbaseClockCurrentDSOffsetFromMaster OBJECT-TYPE
    SYNTAX          ClockTimeInterval
    UNITS           "Time Interval"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the current clock dataset ClockOffset
        value. The value of the computation of the offset in time
        between a slave and a master clock."
    REFERENCE       "1588 Version 2.0 Section 8.2.2.3 of
                     [IEEE 1588-2008]"
    ::= { ptpbaseClockCurrentDSEntry 5 }

ptpbaseClockCurrentDSMeanPathDelay OBJECT-TYPE
    SYNTAX          ClockTimeInterval
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
```

        "This object specifies the current clock dataset
        MeanPathDelay value.

        The mean path delay between a pair of ports as measure by the
        delay request-response mechanism."
    REFERENCE        "1588 Version 2.0 Section 8.2.2.4 mean path delay"
    ::= { ptpbaseClockCurrentDSEntry 6 }



ptpbaseClockParentDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockParentDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Parent Datasets for
        all domains."
    ::= { ptpbaseMIBClockInfo 2 }

ptpbaseClockParentDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockParentDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock Parent Datasets for a domain."
    REFERENCE
        "Section 8.2.3 parentDS data set member specifications of
        [IEEE 1588-2008]"
    INDEX          {
                        ptpbaseClockParentDSDomainIndex,
                        ptpbaseClockParentDSClockTypeIndex,
                        ptpbaseClockParentDSInstanceIndex
                    }
    ::= { ptpbaseClockParentDSTable 1 }

PtpbaseClockParentDSEntry ::= SEQUENCE {
    ptpbaseClockParentDSDomainIndex            ClockDomainType,
    ptpbaseClockParentDSClockTypeIndex         ClockType,
    ptpbaseClockParentDSInstanceIndex          ClockInstanceType,
    ptpbaseClockParentDSParentPortIdentity     OCTET STRING,
    ptpbaseClockParentDSParentStats            TruthValue,
    ptpbaseClockParentDSOffset                 ClockIntervalBase2,
    ptpbaseClockParentDSClockPhChRate          Integer32,
    ptpbaseClockParentDSGMClockIdentity        ClockIdentity,
    ptpbaseClockParentDSGMClockPriority1       Unsigned32,
    ptpbaseClockParentDSGMClockPriority2       Unsigned32,
    ptpbaseClockParentDSGMClockQualityClass    ClockQualityClassType,
    ptpbaseClockParentDSGMClockQualityAccuracy ClockQualityAccuracyType,

```
    ptpbaseClockParentDSGMClockQualityOffset    Unsigned32
}

ptpbaseClockParentDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockParentDSEntry 1 }

ptpbaseClockParentDSClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockParentDSEntry 2 }

ptpbaseClockParentDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockParentDSEntry 3 }

ptpbaseClockParentDSParentPortIdentity OBJECT-TYPE
    SYNTAX          OCTET STRING(SIZE(1..256))
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of portIdentity of the port on
        the master that issues the Sync messages used in synchronizing
        this clock."
    REFERENCE
        "Section 8.2.3.2 parentDS.parentPortIdentity of
         [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 4 }

ptpbaseClockParentDSParentStats OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Parent Dataset ParentStats value.
```

        This value indicates whether the values of ParentDSOffset
        and ParentDSClockPhChRate have been measured and are valid.
        A TRUE value shall indicate valid data."
    REFERENCE          "Section 8.2.3.3 parentDS.parentStats of
                       [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 5 }

ptpbaseClockParentDSOffset OBJECT-TYPE
    SYNTAX          ClockIntervalBase2 (-128..127)
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Parent Dataset
        ParentOffsetScaledLogVariance value.

        This value is the variance of the parent clocks phase as
        measured by the local clock."
    REFERENCE
        "Section 8.2.3.4
        parentDS.observedParentOffsetScaledLogVariance
        [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 6 }

ptpbaseClockParentDSClockPhChRate OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the clock's parent dataset
        ParentClockPhaseChangeRate value.

        This value is an estimate of the parent clocks phase change
        rate as measured by the slave clock."
    REFERENCE
        "Section 8.2.3.5
        parentDS.observedParentClockPhaseChangeRate of
        [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 7 }

ptpbaseClockParentDSGMClockIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset Grandmaster clock
        identity."
    REFERENCE
        "Section 8.2.3.6 parentDS.grandmasterIdentity of

```
        [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 8 }

ptpbaseClockParentDSGMClockPriority1 OBJECT-TYPE
    SYNTAX          Unsigned32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset Grandmaster clock
        priority1."
    REFERENCE
        "Section 8.2.3.8 parentDS.grandmasterPriority1 of
         [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 9 }

ptpbaseClockParentDSGMClockPriority2 OBJECT-TYPE
    SYNTAX          Unsigned32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset grandmaster clock
        priority2."
    REFERENCE
        "Section 8.2.3.9 parentDS.grandmasterPriority2 of
         [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 10 }

ptpbaseClockParentDSGMClockQualityClass OBJECT-TYPE
    SYNTAX          ClockQualityClassType (0..255)
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset grandmaster clock
        quality class."
    REFERENCE
        "Section 8.2.3.7 parentDS.grandmasterClockQuality of
         [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 11 }

ptpbaseClockParentDSGMClockQualityAccuracy OBJECT-TYPE
    SYNTAX          ClockQualityAccuracyType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset grandmaster clock
        quality accuracy."
    REFERENCE
        "Section 8.2.3.7 parentDS.grandmasterClockQuality of
         [IEEE 1588-2008]"
```

      ::= { ptpbaseClockParentDSEntry 12 }

ptpbaseClockParentDSGMClockQualityOffset OBJECT-TYPE
    SYNTAX          Unsigned32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset grandmaster clock
        quality offset."
    REFERENCE
        "Section 8.2.3.7 parentDS.grandmasterClockQuality of
         [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 13 }



ptpbaseClockDefaultDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockDefaultDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Default Datasets for
        all domains."
    ::= { ptpbaseMIBClockInfo 3 }

ptpbaseClockDefaultDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockDefaultDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock Default Datasets for a domain."
    INDEX           {
                        ptpbaseClockDefaultDSDomainIndex,
                        ptpbaseClockDefaultDSClockTypeIndex,
                        ptpbaseClockDefaultDSInstanceIndex
                    }
    ::= { ptpbaseClockDefaultDSTable 1 }

PtpbaseClockDefaultDSEntry ::= SEQUENCE {
      ptpbaseClockDefaultDSDomainIndex     ClockDomainType,
      ptpbaseClockDefaultDSClockTypeIndex  ClockType,
      ptpbaseClockDefaultDSInstanceIndex   ClockInstanceType,
      ptpbaseClockDefaultDSTwoStepFlag      TruthValue,
      ptpbaseClockDefaultDSClockIdentity   ClockIdentity,
      ptpbaseClockDefaultDSPriority1        Unsigned32,
      ptpbaseClockDefaultDSPriority2        Unsigned32,
      ptpbaseClockDefaultDSSlaveOnly        TruthValue,
      ptpbaseClockDefaultDSQualityClass    ClockQualityClassType,

        ptpbaseClockDefaultDSQualityAccuracy ClockQualityAccuracyType,
        ptpbaseClockDefaultDSQualityOffset   Integer32
}

ptpbaseClockDefaultDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockDefaultDSEntry 1 }

ptpbaseClockDefaultDSClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockDefaultDSEntry 2 }

ptpbaseClockDefaultDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockDefaultDSEntry 3 }

ptpbaseClockDefaultDSTwoStepFlag OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies whether the Two Step process is used."
    ::= { ptpbaseClockDefaultDSEntry 4 }

ptpbaseClockDefaultDSClockIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the default Datasets clock identity."
    ::= { ptpbaseClockDefaultDSEntry 5 }

ptpbaseClockDefaultDSPriority1 OBJECT-TYPE
    SYNTAX          Unsigned32

```
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the default Datasets clock Priority1."
    ::= { ptpbaseClockDefaultDSEntry 6 }

ptpbaseClockDefaultDSPriority2 OBJECT-TYPE
    SYNTAX            Unsigned32
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the default Datasets clock Priority2."
    ::= { ptpbaseClockDefaultDSEntry 7 }

ptpbaseClockDefaultDSSlaveOnly OBJECT-TYPE
    SYNTAX            TruthValue
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "Whether the SlaveOnly flag is set."
    ::= { ptpbaseClockDefaultDSEntry 8 }

ptpbaseClockDefaultDSQualityClass OBJECT-TYPE
    SYNTAX            ClockQualityClassType (0..255)
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the default dataset Quality Class."
    ::= { ptpbaseClockDefaultDSEntry 9 }

ptpbaseClockDefaultDSQualityAccuracy OBJECT-TYPE
    SYNTAX            ClockQualityAccuracyType
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the default dataset Quality Accurarcy."
    ::= { ptpbaseClockDefaultDSEntry 10 }

ptpbaseClockDefaultDSQualityOffset OBJECT-TYPE
    SYNTAX            Integer32
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the default dataset Quality offset."
    ::= { ptpbaseClockDefaultDSEntry 11 }



ptpbaseClockRunningTable OBJECT-TYPE
```

```
    SYNTAX          SEQUENCE OF PtpbaseClockRunningEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Running Datasets for
        all domains."
    ::= { ptpbaseMIBClockInfo 4 }

ptpbaseClockRunningEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockRunningEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock running Datasets for a domain."
    INDEX           {
                        ptpbaseClockRunningDomainIndex,
                        ptpbaseClockRunningClockTypeIndex,
                        ptpbaseClockRunningInstanceIndex
                    }
    ::= { ptpbaseClockRunningTable 1 }

PtpbaseClockRunningEntry ::= SEQUENCE {
        ptpbaseClockRunningDomainIndex     ClockDomainType,
        ptpbaseClockRunningClockTypeIndex  ClockType,
        ptpbaseClockRunningInstanceIndex   ClockInstanceType,
        ptpbaseClockRunningState           ClockStateType,
        ptpbaseClockRunningPacketsSent     Counter64,
        ptpbaseClockRunningPacketsReceived Counter64
}

ptpbaseClockRunningDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockRunningEntry 1 }

ptpbaseClockRunningClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockRunningEntry 2 }
```

ptpbaseClockRunningInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockRunningEntry 3 }

ptpbaseClockRunningState OBJECT-TYPE
    SYNTAX          ClockStateType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Clock state returned by PTP engine
        which was described earlier.

        Freerun state. Applies to a slave device that is not locked to
        a master. This is the initial state a slave starts out with
        when
        it is not getting any PTP packets from the master or because of
        some other input error (erroneous packets, etc).

        Holdover state. In this state the slave device is locked to a
        master but communication with the master is lost or the
        timestamps in the ptp packets are incorrect. But since the
        slave was locked to the master, it can run with the same
        accuracy for
        sometime. The slave can continue to operate in this state for
        some time. If communication with the master is not restored for
        a while, the device is moved to the FREERUN state.

        Acquiring state. The slave device is receiving packets from a
        master and is trying to acquire a lock.

        Freq_locked state. Slave device is locked to the Master with
        respect to frequency, but not phase aligned

        Phase_aligned state. Locked to the master with respect to
        frequency and phase."
    ::= { ptpbaseClockRunningEntry 4 }

ptpbaseClockRunningPacketsSent OBJECT-TYPE
    SYNTAX          Counter64
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the total number of all packet Unicast
        and multicast that have been sent out for this clock in this

```
        domain for this type."
    ::= { ptpbaseClockRunningEntry 5 }

ptpbaseClockRunningPacketsReceived OBJECT-TYPE
    SYNTAX          Counter64
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the total number of all packet Unicast
        and multicast that have been received for this clock in this
        domain for this type."
    ::= { ptpbaseClockRunningEntry 6 }




ptpbaseClockTimePropertiesDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockTimePropertiesDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Timeproperties
        Datasets for all domains."
    ::= { ptpbaseMIBClockInfo 5 }

ptpbaseClockTimePropertiesDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockTimePropertiesDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock timeproperties Datasets for a domain."
    REFERENCE       "Section 8.2.4 of [IEEE 1588-2008]"
    INDEX           {
                        ptpbaseClockTimePropertiesDSDomainIndex,
                        ptpbaseClockTimePropertiesDSClockTypeIndex,
                        ptpbaseClockTimePropertiesDSInstanceIndex
                    }
    ::= { ptpbaseClockTimePropertiesDSTable 1 }

PtpbaseClockTimePropertiesDSEntry ::= SEQUENCE {
  ptpbaseClockTimePropertiesDSDomainIndex          ClockDomainType,
  ptpbaseClockTimePropertiesDSClockTypeIndex       ClockType,
  ptpbaseClockTimePropertiesDSInstanceIndex        ClockInstanceType,
  ptpbaseClockTimePropertiesDSCurrentUTCOffsetValid TruthValue,
  ptpbaseClockTimePropertiesDSCurrentUTCOffset     Integer32,
  ptpbaseClockTimePropertiesDSLeap59               TruthValue,
  ptpbaseClockTimePropertiesDSLeap61               TruthValue,
  ptpbaseClockTimePropertiesDSTimeTraceable        TruthValue,
  ptpbaseClockTimePropertiesDSFreqTraceable        TruthValue,
```

```
  ptpbaseClockTimePropertiesDSPTPTimescale          TruthValue,
  ptpbaseClockTimePropertiesDSSource                ClockTimeSourceType
}

ptpbaseClockTimePropertiesDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockTimePropertiesDSEntry 1 }

ptpbaseClockTimePropertiesDSClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockTimePropertiesDSEntry 2 }

ptpbaseClockTimePropertiesDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockTimePropertiesDSEntry 3 }

ptpbaseClockTimePropertiesDSCurrentUTCOffsetValid OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the timeproperties dataset value of
        whether current UTC offset is valid."
    REFERENCE       "Section 8.2.4.2 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 4 }

ptpbaseClockTimePropertiesDSCurrentUTCOffset OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the timeproperties dataset value of
        current UTC offset.
```

        In PTP systems whose epoch is the PTP epoch, the value of
        timePropertiesDS.currentUtcOffset is the offset
        between TAI and UTC; otherwise the value has no meaning. The
        value shall be in units of seconds.
        The initialization value shall be selected as follows:
        a) If the timePropertiesDS.ptpTimescale (see 8.2.4.8) is TRUE,
        the value is the value obtained from a
        primary reference if the value is known at the time of
        initialization, else.
        b) The value shall be the current number of leap seconds (7.2.3)
        when the node is designed."
    REFERENCE       "Section 8.2.4.3 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 5 }

ptpbaseClockTimePropertiesDSLeap59 OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Leap59 value in the clock Current
        Dataset."
    REFERENCE       "Section 8.2.4.4 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 6 }

ptpbaseClockTimePropertiesDSLeap61 OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Leap61 value in the clock Current
        Dataset."
    REFERENCE       "Section 8.2.4.5 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 7 }

ptpbaseClockTimePropertiesDSTimeTraceable OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Timetraceable value in the clock
        Current Dataset."
    REFERENCE       "Section 8.2.4.6 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 8 }

ptpbaseClockTimePropertiesDSFreqTraceable OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION

        "This object specifies the Frequency Traceable value in the
        clock Current Dataset."
    REFERENCE        "Section 8.2.4.7 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 9 }

ptpbaseClockTimePropertiesDSPTPTimescale OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP Timescale value in the clock
        Current Dataset."
    REFERENCE        "Section 8.2.4.8 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 10 }

ptpbaseClockTimePropertiesDSSource OBJECT-TYPE
    SYNTAX          ClockTimeSourceType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Timesource value in the clock Current
        Dataset."
    REFERENCE        "Section 8.2.4.9 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTimePropertiesDSEntry 11 }



ptpbaseClockTransDefaultDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockTransDefaultDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP Transparent clock Default
        Datasets for all domains."
    ::= { ptpbaseMIBClockInfo 6 }

ptpbaseClockTransDefaultDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockTransDefaultDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP Transparent clock Default Datasets for a domain."
    REFERENCE        "Section 8.3.2 of [IEEE 1588-2008]"
    INDEX            {
                        ptpbaseClockTransDefaultDSDomainIndex,
                        ptpbaseClockTransDefaultDSInstanceIndex
                     }
    ::= { ptpbaseClockTransDefaultDSTable 1 }

PtpbaseClockTransDefaultDSEntry ::= SEQUENCE {
        ptpbaseClockTransDefaultDSDomainIndex   ClockDomainType,
        ptpbaseClockTransDefaultDSInstanceIndex ClockInstanceType,
        ptpbaseClockTransDefaultDSClockIdentity ClockIdentity,
        ptpbaseClockTransDefaultDSNumOfPorts    Counter32,
        ptpbaseClockTransDefaultDSDelay         ClockMechanismType,
        ptpbaseClockTransDefaultDSPrimaryDomain Integer32
}

ptpbaseClockTransDefaultDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockTransDefaultDSEntry 1 }

ptpbaseClockTransDefaultDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockTransDefaultDSEntry 2 }

ptpbaseClockTransDefaultDSClockIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the clockIdentity attribute
        of the local clock."
    REFERENCE       "Section 8.3.2.2.1 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTransDefaultDSEntry 3 }

ptpbaseClockTransDefaultDSNumOfPorts OBJECT-TYPE
    SYNTAX          Counter32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the number of PTP ports of the device."
    REFERENCE       "Section 8.3.2.2.2 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTransDefaultDSEntry 4 }

ptpbaseClockTransDefaultDSDelay OBJECT-TYPE
    SYNTAX          ClockMechanismType

```
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object, if the transparent clock is an end-to-end
        transparent clock, has the value shall be E2E; If the
        transparent clock is a peer-to-peer transparent clock, the
        value
        shall be P2P."
    REFERENCE       "Section 8.3.2.3.1 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTransDefaultDSEntry 5 }

ptpbaseClockTransDefaultDSPrimaryDomain OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the primary syntonization
        domain. The initialization value shall be 0."
    REFERENCE       "Section 8.3.2.3.2 of [IEEE 1588-2008]"
    ::= { ptpbaseClockTransDefaultDSEntry 6 }



ptpbaseClockPortTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockPortEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the clock ports for a particular
        domain."
    ::= { ptpbaseMIBClockInfo 7 }

ptpbaseClockPortEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockPortEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
        clock port."
    INDEX           {
                        ptpbaseClockPortDomainIndex,
                        ptpbaseClockPortClockTypeIndex,
                        ptpbaseClockPortClockInstanceIndex,
                        ptpbaseClockPortTablePortNumberIndex
                    }
    ::= { ptpbaseClockPortTable 1 }

PtpbaseClockPortEntry ::= SEQUENCE {
        ptpbaseClockPortDomainIndex         ClockDomainType,
```

```
        ptpbaseClockPortClockTypeIndex        ClockType,
        ptpbaseClockPortClockInstanceIndex    ClockInstanceType,
        ptpbaseClockPortTablePortNumberIndex  ClockPortNumber,
        ptpbaseClockPortName                  DisplayString,
        ptpbaseClockPortRole                  ClockRoleType,
        ptpbaseClockPortSyncOneStep           TruthValue,
        ptpbaseClockPortCurrentPeerAddressType InetAddressType,
        ptpbaseClockPortCurrentPeerAddress    InetAddress,
        ptpbaseClockPortNumOfAssociatedPorts  Gauge32
}

ptpbaseClockPortDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortEntry 1 }

ptpbaseClockPortClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockPortEntry 2 }

ptpbaseClockPortClockInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortEntry 3 }

ptpbaseClockPortTablePortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP Portnumber for this port."
    ::= { ptpbaseClockPortEntry 4 }

ptpbaseClockPortName OBJECT-TYPE
    SYNTAX          DisplayString (SIZE  (1..64))
    MAX-ACCESS      read-only
```

```
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP clock port name configured on the
        router."
    ::= { ptpbaseClockPortEntry 5 }

ptpbaseClockPortRole OBJECT-TYPE
    SYNTAX          ClockRoleType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object describes the current role (slave/master) of the
        port."
    ::= { ptpbaseClockPortEntry 6 }

ptpbaseClockPortSyncOneStep OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies that one-step clock operation between
        the PTP master and slave device is enabled."
    ::= { ptpbaseClockPortEntry 7 }

ptpbaseClockPortCurrentPeerAddressType OBJECT-TYPE
    SYNTAX          InetAddressType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the current peer's network address used
        for PTP communication. Based on the scenario and the setup
        involved, the values might look like these -
        Scenario                    Value
        ------------------    ---------------
        Single Master             master port
        Multiple Masters          selected master port
        Single Slave              slave port
        Multiple Slaves           <empty>

        (In relevant setups, information on available
        slaves and available masters will be available through
        ptpClockPortAssociateTable)"
    ::= { ptpbaseClockPortEntry 8 }

ptpbaseClockPortCurrentPeerAddress OBJECT-TYPE
    SYNTAX          InetAddress
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
```

        "This object specifies the current peer's network address used
        for PTP communication. Based on the scenario and the setup
        involved, the values might look like these –
        Scenario                    Value
        ------------------   ---------------
        Single Master          master port
        Multiple Masters       selected master port
        Single Slave           slave port
        Multiple Slaves        <empty>

        (In relevant setups, information on available
        slaves and available masters will be available through
        ptpClockPortAssociateTable)"
    ::= { ptpbaseClockPortEntry 9 }

ptpbaseClockPortNumOfAssociatedPorts OBJECT-TYPE
    SYNTAX          Gauge32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies –
        For a master port – the number of PTP slave sessions (peers)
        associated with this PTP port.
        For a slave port – the number of masters available to this slave
        port (might or might not be peered)."
    ::= { ptpbaseClockPortEntry 10 }




ptpbaseClockPortDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockPortDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the clock ports dataset for a
        particular domain."
    ::= { ptpbaseMIBClockInfo 8 }

ptpbaseClockPortDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockPortDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing port dataset information for
        a single clock port."
    INDEX           {
                    ptpbaseClockPortDSDomainIndex,
                    ptpbaseClockPortDSClockTypeIndex,
                    ptpbaseClockPortDSClockInstanceIndex,

```
                        ptpbaseClockPortDSPortNumberIndex
                }
    ::= { ptpbaseClockPortDSTable 1 }

PtpbaseClockPortDSEntry ::= SEQUENCE {
        ptpbaseClockPortDSDomainIndex       ClockDomainType,
        ptpbaseClockPortDSClockTypeIndex    ClockType,
        ptpbaseClockPortDSClockInstanceIndex  ClockInstanceType,
        ptpbaseClockPortDSPortNumberIndex   ClockPortNumber,
        ptpbaseClockPortDSName              DisplayString,
        ptpbaseClockPortDSPortIdentity      OCTET STRING,
        ptpbaseClockPortDSAnnouncementInterval Integer32,
        ptpbaseClockPortDSAnnounceRctTimeout  Integer32,
        ptpbaseClockPortDSSyncInterval      Integer32,
        ptpbaseClockPortDSMinDelayReqInterval  Integer32,
        ptpbaseClockPortDSPeerDelayReqInterval Integer32,
        ptpbaseClockPortDSDelayMech         ClockMechanismType,
        ptpbaseClockPortDSPeerMeanPathDelay  ClockTimeInterval,
        ptpbaseClockPortDSGrantDuration     Unsigned32,
        ptpbaseClockPortDSPTPVersion        Integer32
}

ptpbaseClockPortDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortDSEntry 1 }

ptpbaseClockPortDSClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockPortDSEntry 2 }

ptpbaseClockPortDSClockInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortDSEntry 3 }
```

```
ptpbaseClockPortDSPortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP portnumber associated with this
        PTP port."
    ::= { ptpbaseClockPortDSEntry 4 }

ptpbaseClockPortDSName OBJECT-TYPE
    SYNTAX          DisplayString (SIZE  (1..64))
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP clock port name."
    ::= { ptpbaseClockPortDSEntry 5 }

ptpbaseClockPortDSPortIdentity OBJECT-TYPE
    SYNTAX          OCTET STRING(SIZE(1..256))
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP clock port Identity."
    ::= { ptpbaseClockPortDSEntry 6 }

ptpbaseClockPortDSAnnouncementInterval OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Announce message transmission
        interval associated with this clock port."
    ::= { ptpbaseClockPortDSEntry 7 }

ptpbaseClockPortDSAnnounceRctTimeout OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Announce receipt timeout associated
        with this clock port."
    ::= { ptpbaseClockPortDSEntry 8 }

ptpbaseClockPortDSSyncInterval OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Sync message transmission interval."
```

    ::= { ptpbaseClockPortDSEntry 9 }

ptpbaseClockPortDSMinDelayReqInterval OBJECT-TYPE
    SYNTAX         Integer32
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "This object specifies the Delay_Req message transmission
        interval."
    ::= { ptpbaseClockPortDSEntry 10 }

ptpbaseClockPortDSPeerDelayReqInterval OBJECT-TYPE
    SYNTAX         Integer32
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "This object specifies the Pdelay_Req message transmission
        interval."
    ::= { ptpbaseClockPortDSEntry 11 }

ptpbaseClockPortDSDelayMech OBJECT-TYPE
    SYNTAX         ClockMechanismType
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "This object specifies the delay mechanism used. If the clock
        is an end-to-end clock, the value of the is e2e, else if the
        clock is a peer to-peer clock, the value shall be p2p."
    ::= { ptpbaseClockPortDSEntry 12 }

ptpbaseClockPortDSPeerMeanPathDelay OBJECT-TYPE
    SYNTAX         ClockTimeInterval
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "This object specifies the peer meanPathDelay."
    ::= { ptpbaseClockPortDSEntry 13 }

ptpbaseClockPortDSGrantDuration OBJECT-TYPE
    SYNTAX         Unsigned32
    MAX-ACCESS     read-only
    STATUS         current
    DESCRIPTION
        "This object specifies the grant duration allocated by the
        master."
    ::= { ptpbaseClockPortDSEntry 14 }

ptpbaseClockPortDSPTPVersion OBJECT-TYPE
    SYNTAX         Integer32

```
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP version being used."
    ::= { ptpbaseClockPortDSEntry 15 }




ptpbaseClockPortRunningTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockPortRunningEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the clock ports running dataset for
        a particular domain."
    ::= { ptpbaseMIBClockInfo 9 }

ptpbaseClockPortRunningEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockPortRunningEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing runing dataset information
        about a single clock port."
    INDEX           {
                        ptpbaseClockPortRunningDomainIndex,
                        ptpbaseClockPortRunningClockTypeIndex,
                        ptpbaseClockPortRunningClockInstanceIndex,
                        ptpbaseClockPortRunningPortNumberIndex
                    }
    ::= { ptpbaseClockPortRunningTable 1 }

PtpbaseClockPortRunningEntry ::= SEQUENCE {
      ptpbaseClockPortRunningDomainIndex       ClockDomainType,
      ptpbaseClockPortRunningClockTypeIndex    ClockType,
      ptpbaseClockPortRunningClockInstanceIndex ClockInstanceType,
      ptpbaseClockPortRunningPortNumberIndex   ClockPortNumber,
      ptpbaseClockPortRunningName              DisplayString,
      ptpbaseClockPortRunningState             ClockPortState,
      ptpbaseClockPortRunningRole              ClockRoleType,
      ptpbaseClockPortRunningInterfaceIndex    InterfaceIndexOrZero,
      ptpbaseClockPortRunningIPversion         Integer32,
      ptpbaseClockPortRunningEncapsulationType Integer32,
      ptpbaseClockPortRunningTxMode            ClockTxModeType,
      ptpbaseClockPortRunningRxMode            ClockTxModeType,
      ptpbaseClockPortRunningPacketsReceived   Counter64,
      ptpbaseClockPortRunningPacketsSent       Counter64
}
```

ptpbaseClockPortRunningDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortRunningEntry 1 }

ptpbaseClockPortRunningClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockPortRunningEntry 2 }

ptpbaseClockPortRunningClockInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortRunningEntry 3 }

ptpbaseClockPortRunningPortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP portnumber associated with this
        clock port."
    ::= { ptpbaseClockPortRunningEntry 4 }

ptpbaseClockPortRunningName OBJECT-TYPE
    SYNTAX          DisplayString (SIZE  (1..64))
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP clock port name."
    ::= { ptpbaseClockPortRunningEntry 5 }

ptpbaseClockPortRunningState OBJECT-TYPE
    SYNTAX          ClockPortState
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION

        "This object specifies the port state returned by PTP engine.

        initializing - In this state a port initializes
                       its data sets, hardware, and
                       communication facilities.
        faulty       - The fault state of the protocol.
        disabled     - The port shall not place any
                       messages on its communication path.
        listening    - The port is waiting for the
                       announceReceiptTimeout to expire or
                       to receive an Announce message from
                       a master.
        preMaster    - The port shall behave in all respects
                       as though it were in the MASTER state
                       except that it shall not place any
                       messages on its communication path
                       except for Pdelay_Req, Pdelay_Resp,
                       Pdelay_Resp_Follow_Up, signaling, or
                       management messages.
        master       - The port is behaving as a master port.
        passive      - The port shall not place any
                       messages on its communication path
                       except for Pdelay_Req, Pdelay_Resp,
                       Pdelay_Resp_Follow_Up, or signaling
                       messages, or management messages
                       that are a required response to
                       another management message
        uncalibrated - The local port is preparing to
                       synchronize to the master port.
        slave        - The port is synchronizing to the
                       selected master port."
     ::= { ptpbaseClockPortRunningEntry 6 }

ptpbaseClockPortRunningRole OBJECT-TYPE
    SYNTAX          ClockRoleType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Clock Role."
    ::= { ptpbaseClockPortRunningEntry 7 }

ptpbaseClockPortRunningInterfaceIndex OBJECT-TYPE
    SYNTAX          InterfaceIndexOrZero
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the interface on the router being used by
        the PTP Clock for PTP communication."
    ::= { ptpbaseClockPortRunningEntry 8 }

ptpbaseClockPortRunningIPversion OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the IP version being used for PTP
        communication (the mapping used)."
    ::= { ptpbaseClockPortRunningEntry 9 }

ptpbaseClockPortRunningEncapsulationType OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the type of encapsulation if the
        interface is adding extra layers (eg. VLAN, Pseudowire
        encapsulation...) for the PTP messages."
    ::= { ptpbaseClockPortRunningEntry 10 }

ptpbaseClockPortRunningTxMode OBJECT-TYPE
    SYNTAX          ClockTxModeType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the clock transmission mode as

        unicast:       Using unicast communication channel.
        multicast:     Using Multicast communication channel.
        multicast-mix: Using multicast-unicast communication channel"
    ::= { ptpbaseClockPortRunningEntry 11 }

ptpbaseClockPortRunningRxMode OBJECT-TYPE
    SYNTAX          ClockTxModeType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifie the clock receive mode as

        unicast:       Using unicast communication channel.
        multicast:     Using Multicast communication channel.
        multicast-mix: Using multicast-unicast communication channel"
    ::= { ptpbaseClockPortRunningEntry 12 }

ptpbaseClockPortRunningPacketsReceived OBJECT-TYPE
    SYNTAX          Counter64
    UNITS           "packets"
    MAX-ACCESS      read-only
    STATUS          current

    DESCRIPTION
        "This object specifies the packets received on the clock port
        (cummulative)."
    ::= { ptpbaseClockPortRunningEntry 13 }

ptpbaseClockPortRunningPacketsSent OBJECT-TYPE
    SYNTAX          Counter64
    UNITS           "packets"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the packets sent on the clock port
        (cummulative)."
    ::= { ptpbaseClockPortRunningEntry 14 }



ptpbaseClockPortTransDSTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockPortTransDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the Transparent clock ports running
        dataset for a particular domain."
    ::= { ptpbaseMIBClockInfo 10 }

ptpbaseClockPortTransDSEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockPortTransDSEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing clock port Transparent
        dataset information about a single clock port"
    INDEX           {
                        ptpbaseClockPortTransDSDomainIndex,
                        ptpbaseClockPortTransDSInstanceIndex,
                        ptpbaseClockPortTransDSPortNumberIndex
                    }
    ::= { ptpbaseClockPortTransDSTable 1 }

PtpbaseClockPortTransDSEntry ::= SEQUENCE {
      ptpbaseClockPortTransDSDomainIndex      ClockDomainType,
      ptpbaseClockPortTransDSInstanceIndex    ClockInstanceType,
      ptpbaseClockPortTransDSPortNumberIndex  ClockPortNumber,
      ptpbaseClockPortTransDSPortIdentity     ClockIdentity,
      ptpbaseClockPortTransDSlogMinPdelayReqInt Integer32,
      ptpbaseClockPortTransDSFaultyFlag       TruthValue,
      ptpbaseClockPortTransDSPeerMeanPathDelay ClockTimeInterval
}

ptpbaseClockPortTransDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortTransDSEntry 1 }

ptpbaseClockPortTransDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortTransDSEntry 2 }

ptpbaseClockPortTransDSPortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP port number associated with this
        port."
    REFERENCE       "Section 7.5.2 Port Identity [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 3 }

ptpbaseClockPortTransDSPortIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the PortIdentity
        attribute of the local port."
    REFERENCE       "Section 8.3.3.2.1 of [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 4 }

ptpbaseClockPortTransDSlogMinPdelayReqInt OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the logarithm to the
        base 2 of the minPdelayReqInterval."
    REFERENCE       "Section 8.3.3.3.1 of [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 5 }

```
ptpbaseClockPortTransDSFaultyFlag OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value TRUE if the port is faulty
        and FALSE if the port is operating normally."
    REFERENCE       "Section 8.3.3.3.2 of [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 6 }

ptpbaseClockPortTransDSPeerMeanPathDelay OBJECT-TYPE
    SYNTAX          ClockTimeInterval
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies, (if the delayMechanism used is P2P) the
        value is the estimate of the current one-way propagation delay,
        i.e., <meanPathDelay> on the link attached to this port
        computed
        using the peer delay mechanism. If the value of the
        delayMechanism
        used is E2E, then the value will be zero."
    REFERENCE       "Section 8.3.3.3.3 of [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 7 }



ptpbaseClockPortAssociateTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockPortAssociateEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about a given port's associated ports.

        For a master port - multiple slave ports which have established
        sessions with the current master port.
        For a slave port - the list of masters available for a given
        slave port.

        Session information (pkts, errors) to be displayed based on
        availability and scenario."
    ::= { ptpbaseMIBClockInfo 11 }

ptpbaseClockPortAssociateEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockPortAssociateEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
```

```
        associated port for the given clockport."
    INDEX           {
                        ptpClockPortCurrentDomainIndex,
                        ptpClockPortCurrentClockTypeIndex,
                        ptpClockPortCurrentClockInstanceIndex,
                        ptpClockPortCurrentPortNumberIndex,
                        ptpbaseClockPortAssociatePortIndex
                    }
    ::= { ptpbaseClockPortAssociateTable 1 }

PtpbaseClockPortAssociateEntry ::= SEQUENCE {
        ptpClockPortCurrentDomainIndex          ClockDomainType,
        ptpClockPortCurrentClockTypeIndex       ClockType,
        ptpClockPortCurrentClockInstanceIndex   ClockInstanceType,
        ptpClockPortCurrentPortNumberIndex      ClockPortNumber,
        ptpbaseClockPortAssociatePortIndex      Unsigned32,
        ptpbaseClockPortAssociateAddressType    InetAddressType,
        ptpbaseClockPortAssociateAddress        InetAddress,
        ptpbaseClockPortAssociatePacketsSent    Counter64,
        ptpbaseClockPortAssociatePacketsReceived Counter64,
        ptpbaseClockPortAssociateInErrors       Counter64,
        ptpbaseClockPortAssociateOutErrors      Counter64
}

ptpClockPortCurrentDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the given port's domain number."
    ::= { ptpbaseClockPortAssociateEntry 1 }

ptpClockPortCurrentClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the given port's clock type."
    ::= { ptpbaseClockPortAssociateEntry 2 }

ptpClockPortCurrentClockInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortAssociateEntry 3 }
```

ptpClockPortCurrentPortNumberIndex OBJECT-TYPE
    SYNTAX           ClockPortNumber
    MAX-ACCESS       not-accessible
    STATUS           current
    DESCRIPTION
        "This object specifies the PTP Port Number for the given port."
    ::= { ptpbaseClockPortAssociateEntry 4 }

ptpbaseClockPortAssociatePortIndex OBJECT-TYPE
    SYNTAX           Unsigned32 (1..65535)
    MAX-ACCESS       not-accessible
    STATUS           current
    DESCRIPTION
        "This object specifies the associated port's serial number in
        the current port's context."
    ::= { ptpbaseClockPortAssociateEntry 5 }

ptpbaseClockPortAssociateAddressType OBJECT-TYPE
    SYNTAX           InetAddressType
    MAX-ACCESS       read-only
    STATUS           current
    DESCRIPTION
        "This object specifies the peer port's network address type used
        for PTP communication."
    ::= { ptpbaseClockPortAssociateEntry 6 }

ptpbaseClockPortAssociateAddress OBJECT-TYPE
    SYNTAX           InetAddress
    MAX-ACCESS       read-only
    STATUS           current
    DESCRIPTION
        "This object specifies the peer port's network address used for
        PTP communication."
    ::= { ptpbaseClockPortAssociateEntry 7 }

ptpbaseClockPortAssociatePacketsSent OBJECT-TYPE
    SYNTAX           Counter64
    UNITS            "packets"
    MAX-ACCESS       read-only
    STATUS           current
    DESCRIPTION
        "The number of packets sent to this peer port from the current
        port."
    ::= { ptpbaseClockPortAssociateEntry 8 }

ptpbaseClockPortAssociatePacketsReceived OBJECT-TYPE
    SYNTAX           Counter64
    UNITS            "packets"
    MAX-ACCESS       read-only

```
    STATUS            current
    DESCRIPTION
        "The number of packets received from this peer port by the
        current port."
    ::= { ptpbaseClockPortAssociateEntry 9 }

ptpbaseClockPortAssociateInErrors OBJECT-TYPE
    SYNTAX            Counter64
    UNITS             "packets"
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the input errors associated with the
        peer port."
    ::= { ptpbaseClockPortAssociateEntry 10 }

ptpbaseClockPortAssociateOutErrors OBJECT-TYPE
    SYNTAX            Counter64
    UNITS             "packets"
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "This object specifies the output errors associated with the
        peer port."
    ::= { ptpbaseClockPortAssociateEntry 11 }


END
```

5. Security Considerations

   This MIB contains readable objects whose values provide information
   related to PTP objects. While unauthorized access to the readable
   objects is relatively innocuous, unauthorized access to the write-
   able objects could cause a denial of service, or could cause
   unauthorized creation and/or manipulation of tunnels. Hence, the
   support for SET operations in a non-secure environment without proper
   protection can have a negative effect on network operations.

   SNMPv1 by itself is such an insecure environment.  Even if the
   network itself is secure (for example by using IPSec), even then,
   there is no control as to who on the secure network is allowed to
   access and SET (change/create/delete) the objects in this MIB.

   It is recommended that the implementers consider the security
   features as provided by the SNMPv3 framework.  Specifically, the use
   of the User-based Security Model [RFC 3414] and the View-based Access
   Control Model [RFC 3415] is recommended.

It is then a customer/user responsibility to ensure that the SNMP
entity giving access to this MIB, is properly configured to give
access to those objects only to those principals (users) that have
legitimate rights to access them.

6. IANA Considerations

To be added.

7. References

7.1. Normative References

[IEEE 1588-2008] "IEEE Standard for A Precision Clock Synchronization
Protocol for Networked Measurement and Control Systems", IEEE Std.
1588(TM)-2008, 24 July 2008

7.2. Informative References

[RFC 1155] Rose, M., and K. McCloghrie, "Structure and Identification
of Management Information for TCP/IP-based Internets", STD 16, RFC
1155, Performance Systems International, Hughes LAN Systems, May 1990

[RFC 1157] Case, J., Fedor, M., Schoffstall, M., and J. Davin,
"Simple Network Management Protocol", STD 15, RFC 1157, SNMP
Research, Performance Systems International, Performance Systems
International, MIT Laboratory for Computer Science, May 1990.

[RFC 1212] Rose, M., and K. McCloghrie, "Concise MIB Definitions",
STD 16, RFC 1212, Performance Systems International, Hughes LAN
Systems, March 1991

[RFC 1215] M. Rose, "A Convention for Defining Traps for use with the
SNMP", RFC 1215, Performance Systems International, March 1991

[RFC 1901]  SNMPv2 Working Group, Case, J., McCloghrie, K., Rose, M.,
and S. Waldbusser, "Introduction to Community-based SNMPv2", RFC
1901, SNMP Research, Inc., Cisco Systems, Inc., Dover Beach
Consulting, Inc., International Network Services, January 1996.

[RFC 1906] SNMPv2 Working Group, Case, J., McCloghrie, K., Rose, M.,
and S. Waldbusser, "Transport Mappings for Version 2 of the Simple
Network Management Protocol (SNMPv2)", RFC 1906, SNMP Research, Inc.,
Cisco Systems, Inc., Dover Beach Consulting, Inc., International
Network Services, January 1996.

[RFC 2578] McCloghrie, K., Perkins, D., and J. Schoenwaelder,
"Structure of Management Information Version 2 (SMIv2)", STD 58, RFC
2578, April 1999.

[RFC 2579] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Textual Conventions for SMIv2", STD 58, RFC 2579, April 1999.

[RFC 2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIv2", STD 58, RFC 2580, April 1999.

[RFC 3411] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks", STD 62, RFC 3411, Enterasys Networks, BMC Software, Inc., Lucent Technologies, December 2002

[RFC 3412] Case, J., Harrington D., Presuhn R., and B. Wijnen, "Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3412, SNMP Research, Inc., Enterasys Networks, BMC Software, Inc., Lucent Technologies, December 2002.

[RFC 3413] Levi, D., Meyer, P., and B. Stewart, "Simple Network Management Protocol (SNMP) Applications", STD 62, RFC 3413, Nortel Networks, Secure Computing Corporation, December 2002.

[RFC 3414] Blumenthal, U., and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", STD 62, RFC 3414, Lucent Technologies, December 2002.

[RFC 3415] Wijnen, B., Presuhn, R., and K. McCloghrie, "View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3415, Lucent Technologies, BMC Software, Inc., Cisco Systems, Inc., December 2002.

[RFC 3416] Presuhn, R. (Ed.), "Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3416, BMC Software, Inc., December 2002.

[RFC 3417] Presuhn, R. (Ed.), "Transport Mappings for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3417, BMC Software, Inc., December 2002.

[RFC 5905] David L. Mills, " Network Time Protocol Version 4: Protocol and Algorithms Specification", RFC 5905, University of Delaware, June 2010.

[IEEE 802.3-2008] "IEEE Standard for Information technology — Telecommunications and information exchange between systems — Local and Metropolitan area networks — Specific requirements Part 3: Carrier sense multiple access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications", IEEE Std. 802.3 - 2008, 26 December 2008

[G.8265.1] "Precision time protocol telecom profile for frequency

   synchronization", ITU-T Recommendation G.8265.1, October 2010.

8. Acknowledgements

   Thanks to John Linton and Danny Lee for valuable comments.

9. Author's Addresses

   Vinay Shankarkumar
   Cisco Systems,
   7025-4 Kit Creek Road,
   Research Triangle Park,
   NC 27560,
   USA.
   Email: vinays@cisco.com

   Laurent Montini,
   Cisco Systems,
   11, rue Camille Desmoulins,
   92782 Issy-les-Moulineaux,
   France.
   Email: lmontini@cisco.com

   Tim Frost,
   Symmetricom Inc.,
   2300 Orchard Parkway,
   San Jose,
   CA 95131,
   USA.
   Email: tfrost@symmetricom.com

   Greg Dowd,
   Symmetricom Inc.,
   2300 Orchard Parkway,
   San Jose,
   CA 95131,
   USA.
   Email: gdowd@symmetricom.com