AD 2. AERODROMES

OICS AD 2.1 AERODROME LOCATION INDICATOR AND NAME

OICS - SANANDAJ / Secondary International Aerodrome

OICS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	*ARP coordinates and site at AD*	351503N 0470040E
2	*Direction and distance from (city)*	S, 4.5 NM from Sanandaj
3	*Elevation / Reference temperature*	4528 FT / 37°C
4	*MAG VAR / Annual change*	5° E (2017) / Information not available
5	*AD Administration, address, telephone, telefax, telex, AFS*	Iran Airports & Air Navigation Company (IAC) Sanandaj Airport Sanandaj, Islamic Republic of Iran Tel: +9887 – 33774051-3, 33774060 Telefax: +9887 - 33774066 Telex: NIL AFS: OICSYDYX
6	*Types of traffic permitted (IFR/VFR)*	IFR/VFR
7	*Remarks*	NIL

OICS AD 2.3 OPERATIONAL HOURS

1	*AD Administration*	SAT to THU 0400-1100 Except Holidays
2	*Customs and immigration*	O/R
3	*Health and sanitation*	O/R
4	*AIS Briefing Office*	NIL
5	*ATS Reporting Office (ARO)*	Service available by ATS
6	*MET Briefing Office*	NIL
7	*ATS*	FM 21 MAR TO 22 SEP: 0230-1430 and FM 23 SEP TO 20 MAR: 0330-1330
8	*Fuelling*	Same as ATS
9	*Handling*	Available during schedule flights, other times O/R
10	*Security*	H24
11	*De-icing*	NIL
12	*Remarks*	Other times O/R, PPR at least 72 HR before EOBT from OICS

OICS AD 2.4 HANDLING SERVICES AND FACILITIES

1	*Cargo - handling facilities*	Available by main carrier
2	*Fuel / oil types*	Jet A1
3	*Fuelling facilities/capacity*	1 truck 18000 litres, 17 litres/sec ,1 truck 8000 litres, 5 litres/sec
4	*De - icing facilities*	NIL
5	*Hanger space for visiting aircraft*	NIL
6	*Repair facilities for visiting aircraft*	NIL
7	*Remarks*	NIL

OICS AD 2.5 PASSENGER FACILITIES

1	*Hotels*	Available in the city
2	*Restaurants*	Available in the city
3	*Transportation*	Taxis
4	*Medical facilities*	First aids and ambulance at aerodrome; Hospital in the city
5	*Bank and Post Office*	ATM Available and bank is available for preplanned international flight.
6	*Tourist Office*	Available at aerodrome
7	*Remarks*	NIL

OICS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	*AD category for fire fighting*	CAT 6
2	*Rescue equipment*	Available in accordance with AD category for firefighting
3	*Capability for removal of disabled aircraft*	NIL
4	*Remarks*	NIL

OICS AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	*Types of clearing equipment*	6 snow ploughs, 1 snow brush, 3 truck sweepers (one of the truck sweepers has the ability to spray urea)
2	*Clearance priorities*	1- RWY 2- TWY A 3- Apron 4- TWY B
3	*Remarks*	NIL

OICS AD 2.8 APRONS, TAXIWAYS

1	*Apron surface and strength*	Surface: Asphalt Strength: PCN 55/F/C/X/T
2	*Taxiway width, surface and strength*	Width: 23 M Surface: Asphalt Strength: PCN 55/F/C/X/T
3	*Remarks*	Apron dimensions: 260 x 82 M

OICS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	*Use of aircraft stand ID signs, TWY guide lines and parking guidance system of aircraft stands*	Guide lines at apron. Nose-in guidance at aircraft stand
2	*RWY and TWY markings and LGT*	RWY: Designation, THR, DTHR, TDZ, centre line, edge & end marked THR, edge & end lighted. TWY: Edge & centre line marked. Edge lighted.
3	*Stop bars*	NIL
4	*Remarks*	NIL

OICS AD 2.10 AERODROME OBSTACLES

In approach / TKOF areas			*In circling area and at AD*		*Remarks*
1			2		3
RWY/Area affected	*Obstacle type Elevation/ HGT Markings/LGT*	*Coordinates*	*Obstacle type Elevation / HGT Markings/LGT*	*Coordinates*	
a	b	c	a	b	
01/APCH 19/TKOF	Building 4635 FT AMSL NIL	351316N 0470007E	Power line 4902 FT AMSL NIL	351352N 0470102E	
01/APCH 19/TKOF	Cement Bunker 4658 FT AMSL NIL	351314N 0470006E	Power line 4800 FT AMSL NIL	351330N 0470049E	
01/APCH 19/TKOF	LOC Building 4499 FT AMSL NIL	351346.5N 0470012.6E	Building 4710 FT AMSL NIL	351311N 0470033E	
01/APCH 19/TKOF	Building 4547 FT AMSL NIL	351304N 0465952E	COM Mast 4648 FT AMSL NIL	351324N 0470026E	
01/APCH 19/TKOF	Building 4538 FT AMSL NIL	351324N 0465956E	Building 4707 FT AMSL NIL	351311N 0470018E	
19/APCH 01/TKOF	Building 4804 FT AMSL NIL	351708N 0470112E	Building 4628 FT AMSL NIL	351320N 0470012E	
19/APCH 01/TKOF	Building 4809 FT AMSL NIL	351709N 0470117E	Building 4629 FT AMSL NIL	351319N 0470010E	

→	19/APCH 01/TKOF	Building 4814 FT AMSL NIL	351711N 0470122E	→	Power line 4612 FT AMSL NIL	351357N 0470000E	
→	19/APCH 01/TKOF	COM mast 8002 FT AMSL NIL	352551N 0470439E	→	Mast 4567 FT AMSL NIL	351411N 0470010E	
→	19/APCH 01/TKOF	Building 4760 FT AMSL NIL	351740N 0470145E	→	Mast 4551 FT AMSL NIL	351440N 0470042E	
→	19/APCH 01/TKOF	Building 4677 FT AMSL NIL	351653N 0470124E	→	Wall 4493 FT AMSL NIL	351352N 0470018E	
→	19/APCH 01/TKOF	Building 4541 FT AMSL NIL	351532N 0470054E	→	Mast 5636 FT AMSL NIL	351541N 0465842E	
→	19/APCH 01/TKOF	Power Line 4622 FT AMSL NIL	351605N 0470111E	→	Mast 4874 FT AMSL NIL	351530N 0470005E	
→	19/APCH 01/TKOF	Power Line 4639 FT AMSL NIL	351606N 0470102E	→	Building 4864 FT AMSL NIL	351531N 0465956E	
→	19/APCH 01/TKOF	Power Line 4642 FT AMSL NIL	351604N 0470101E	→	Mast 4649 FT AMSL NIL	351531N 0470037E	
→	19/APCH 01/TKOF	Power Line 4654 FT AMSL NIL	351610N 0470101E	→	Building 4791 FT AMSL NIL	351546N 0470022E	
→	19/APCH 01/TKOF	Power Line 4674 FT AMSL NIL	351618N 0470101E	→	Mast (NDB) 4770 FT AMSL NIL	351543.6N 0470033.9E	
→	19/APCH 01/TKOF	Power Line 4706 FT AMSL NIL	351626N 0470102E	→	COM Mast 4727 FT AMSL NIL	351555N 0470037E	
				→	Mast 4733 FT AMSL NIL	351603N 0470043E	
				→	Building 5018 FT AMSL NIL	351709N 0470031E	
				→	Building 5048 FT AMSL NIL	351713N 0470059E	
				→	Mast 4947 FT AMSL NIL	351543N 0470157E	
				→	Mast 4579 FT AMSL NIL	351526N 0470057E	

		→	Mast 4629 FT AMSL NIL	351524N 0470100E	
		→	Mast 4572 FT AMSL NIL	351524N 0470055E	
		→	Mosque 4613 FT AMSL NIL	351520N 0470058E	
		→	Apron Mast 4590 FT AMSL NIL	351510N 0470050E	
		→	Apron Mast 4590 FT AMSL NIL	351502N 0470046E	
		→	Control TOWER 4591 FT AMSL NIL	351503N 0470047E	
		→	GP Antenna 4565 FT AMSL NIL	351518.7N 0470042.3E	
		→	Building 4873 FT AMSL NIL	351715N 0470107E	
		→	Building 4626 FT AMSL NIL	351527N 0470105E	
		→	Building 4541 FT AMSL NIL	351358N 0470028E	
		→	Power Line 4621 FT AMSL NIL	351558N 0470114E	
		→	Power Line 4633 FT AMSL NIL	351604N 0470117E	
		→	Power Line 4672 FT AMSL NIL	351608N 0470054E	
		→	Power Line 4685 FT AMSL NIL	351608N 0470054E	
		→	Power Line 4686 FT AMSL NIL	351609N 0470053E	
		→	Power Line 4680 FT AMSL NIL	351609N 0470053E	

OICS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	*Associated MET Office*	Sanandaj
2	*Hours of service* *MET Office outside hours*	H24 --
9	*ATS units provided with information*	Sanandaj TWR

Note: Subject concerning item 3 to 8 and 10 not available.

OICS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	*TRUE BRG*	*Dimensions of RWY (M)*	*Strength(PCN) and surface of RWY and SWY*	*THR coordinates THR Geoid undulation*	*THR elevation and highest elevation of TDZ of precision APP RWY*
1	2	3	4	5	6
01	018.18°GEO	3019 x 45	55/F/C/X/T Asphalt	351353.26N 0470012.33E GUND +41 FT	THR 4488 FT
19	198.19°GEO	3019 x 45	55/F/C/X/T Asphalt	351526.33N 0470049.59E GUND +41 FT	THR 4528 FT

Slope of RWY - SWY	*SWY dimensions (M)*	*CWY dimensions (M)*	*Strip dimensions (M)*	*OFZ*	*Remarks*
7	8	9	10	11	12
-0.4 %	110 x 45	110 x 150	NIL	NIL	THR RWY 01 displaced 500 M. DTHR elevation 4484FT. DTHR RWY 01 coordinates: 351408.68N 0470018.49E
-0.4 %	95 x 45	95 x 150	NIL	NIL	NIL

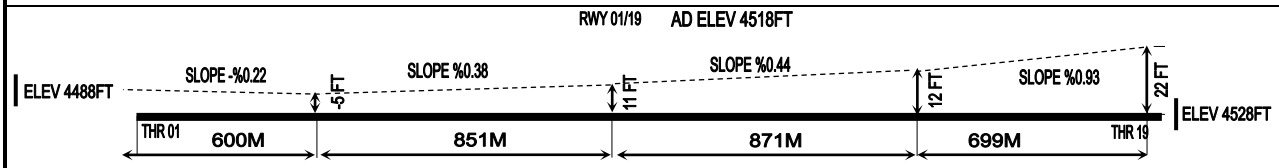

OICS AD 2.13 DECLARED DISTANCES

RWY Designator	*TORA (M)*	*TODA (M)*	*ASDA (M)*	*LDA (M)*	*Remarks*
1	2	3	4	5	6
01	3019	3129	3129	2519	NIL
19	2519	3114	3114	3019	NIL

OICS AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	*APCH LGT type LEN INTST*	*THR LGT colour WBAR*	*VASIS (MEHT) PAPI*	*TDZ LGT LEN*	*RWY Centre Line LGT LEN, spacing, colour INTST*	*RWY edge LGT LEN, spacing colour, INTST*	*RWY End LGT colour WBAR*	*SWY LGT LEN colour*	*Remarks*
1	*2*	*3*	*4*	*5*	*6*	*7*	*8*	*9*	*10*
01	*NIL*	*Green Supplemented by WBAR*	*NIL*	*NIL*	*NIL*	*3019 M 60 M White, LIH*	*Red*	*110 M Red*	*THR and WBAR lights installed at permanent DTHR*
19	*NIL*	*Green Supplemented by WBAR*	*PAPI Left / 4° (64 FT)*	*NIL*	*NIL*	*3019 M 60 M White, LIH*	*Red*	*NIL*	*NIL*

OICS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	*ABN location, characteristics and hours of operation*	At the top of tower building, FLG G and W, EV 4 sec For arriving and departing flights during night and IMC
2	*LDI location and LGT* *Anemometer location and LGT*	NIL
3	*TWY edge and centre line lighting*	Edge: all TWY Centre line: NIL
4	*Secondary power supply/switch-over time*	Available Switch-over time: 10 - 15 sec
5	*Remarks*	NIL

OICS AD 2.16 HELICOPTER LANDING AREA

NIL

OICS AD 2.17 ATS AIRSPACE

1	*Designation and lateral limits*	Sanandaj CTR: A circle, radius 24 NM centered at 351419.7N 0470029.2E (VOR/DME)	Sanandaj ATZ: A circle, radius 7 NM centered at 351503N 0470040E (ARP)
2	*Vertical limits*	FL 155	11000 FT AMSL
3	*Airspace classification*	D	
4	*ATS unit call sign* *Language(s)*	Sanandaj TWR English / Persian	
5	*Transition altitude*	11000 FT AMSL	
6	*Remarks*	NIL	

OICS AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	*Call sign*	*Frequency*	*Hours of operation*	*Remarks*
1	2	3	4	5
TWR	Sanandaj Tower	122.900 MHZ 121.900 MHZ 121.500 MHZ	FM 21 MAR TO 22 SEP: 0230-1430 and FM 23 SEP TO 20 MAR: 0330-1330	Emergency frequency
ATIS (INFO)	Sanandaj Information	128.450 MHZ		

OICS AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, CAT of ILS (For VOR/ILS, give VAR)	*ID*	*Frequency*	*Hours of operation*	*Site of transmitting antenna coordinates*	*Elevation of DME transmitting antenna*	*Remarks*
1	2	3	4	5	6	7
VOR/DME (5° E 2017)	SNJ	116.500 MHZ CH 112X	H24	351419.7N 0470029.2E		
LOC RWY 19 ILS CAT I (5° E 2017)	ISNJ	109.300 MHZ	H24	351347.2N 0470009.9E		
ILS GP RWY 19		332.000 MHZ	H24	351518.7N 0470042.4E		4° RDH 54 FT
ILS/DME RWY 19	ISNJ	CH 30X	H24	351518.7N 0470042.3E		

VOR/DME unusable in counter clockwise direction beyond 25 DME in the FLW area:

- RDL 360°- 330° BLW 15000 FT AMSL.
- RDL 330°- 200° BLW 20000 FT AMSL.
- RDL 200°- 130° BLW 19000 FT AMSL.
- RDL 130°- 080° BLW 21000 FT AMSL.
- RDL 080°- 040° BLW 20000 FT AMSL.
- RDL 040°- 360° BLW 17000 FT AMSL.

ILS: Do not deviate below GP angle due to high terrain.

Coverage of LOC is +34°/-32° at 10300FT on 17NM.

OICS AD 2.20 LOCAL TRAFFIC REGULATIONS

NIL

OICS AD 2.21 NOISE ABATEMENT PROCEDURES

NIL

OICS AD 2.22 FLIGHT PROCEDURES

Traffic pattern is defined as below:

a. For fighter and heavy fixed-wing ACFT 6100 FT,
b. For other fixed-wing ACFT 5600 FT and
c. For helicopter 5100 FT.

Note: see AD 1.1.

OICS AD 2.23 ADDITIONAL INFORMATION

1- Intensive birds' accumulation exist in the vicinity of AD.

2- Strolling dogs exist on the movement area.

3- Anti-icing & De-icing area located at north part of apron.

4- Heavy and medium aircraft make 180° turn only at the end of RWY in use.

5- A pond exists on right side of RWY 19, 1800 m after THR RWY 19 and 80m from RWY centerline with following specifications:

Width: 30m, length: 100m, depth: 8m.

6- A canal exists on right side of RWY 19 with the following specifications:

Distance from THR RWY 19: 1800m up to 1900m after THR RWY 19,

Distance from RCL: 105m (up to 109m) from RCL,

Length: 100m, Width: 4m, Depth: 3m.

7- A pool exists on left side of RWY 19 with the following specifications:

Distance from THR RWY 19: 300m after THR RWY 19.

Distance from RCL: 110m from RCL,

Length: 13m, Width: 3m, Depth: 1.5m.

OICS AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome Chart - ICAO---------- AD 2 OICS ADC

Standard Departure Chart - Instrument - ICAO ---------- AD 2 OICS SID 1-1

Arrival Chart - Instrument - ICAO---------- AD 2 OICS STAR 1-1

Instrument Approach Chart – ICAO ---------- AD 2 OICS IAC 1-1

AD 2 OICS IAC 2-1