INSTRUMENT APPROACH CHART-ICAO

AERODROME ELEV. 4054 FT
HEIGHTS RELATED TO
THR RWY 31 ELEV. 4054 FT

TWR	122.700
	121.900
ATIS	126.250

YAZD/SHAHID SADOOGHI
ILS RWY 31
CAT A/B/C/D

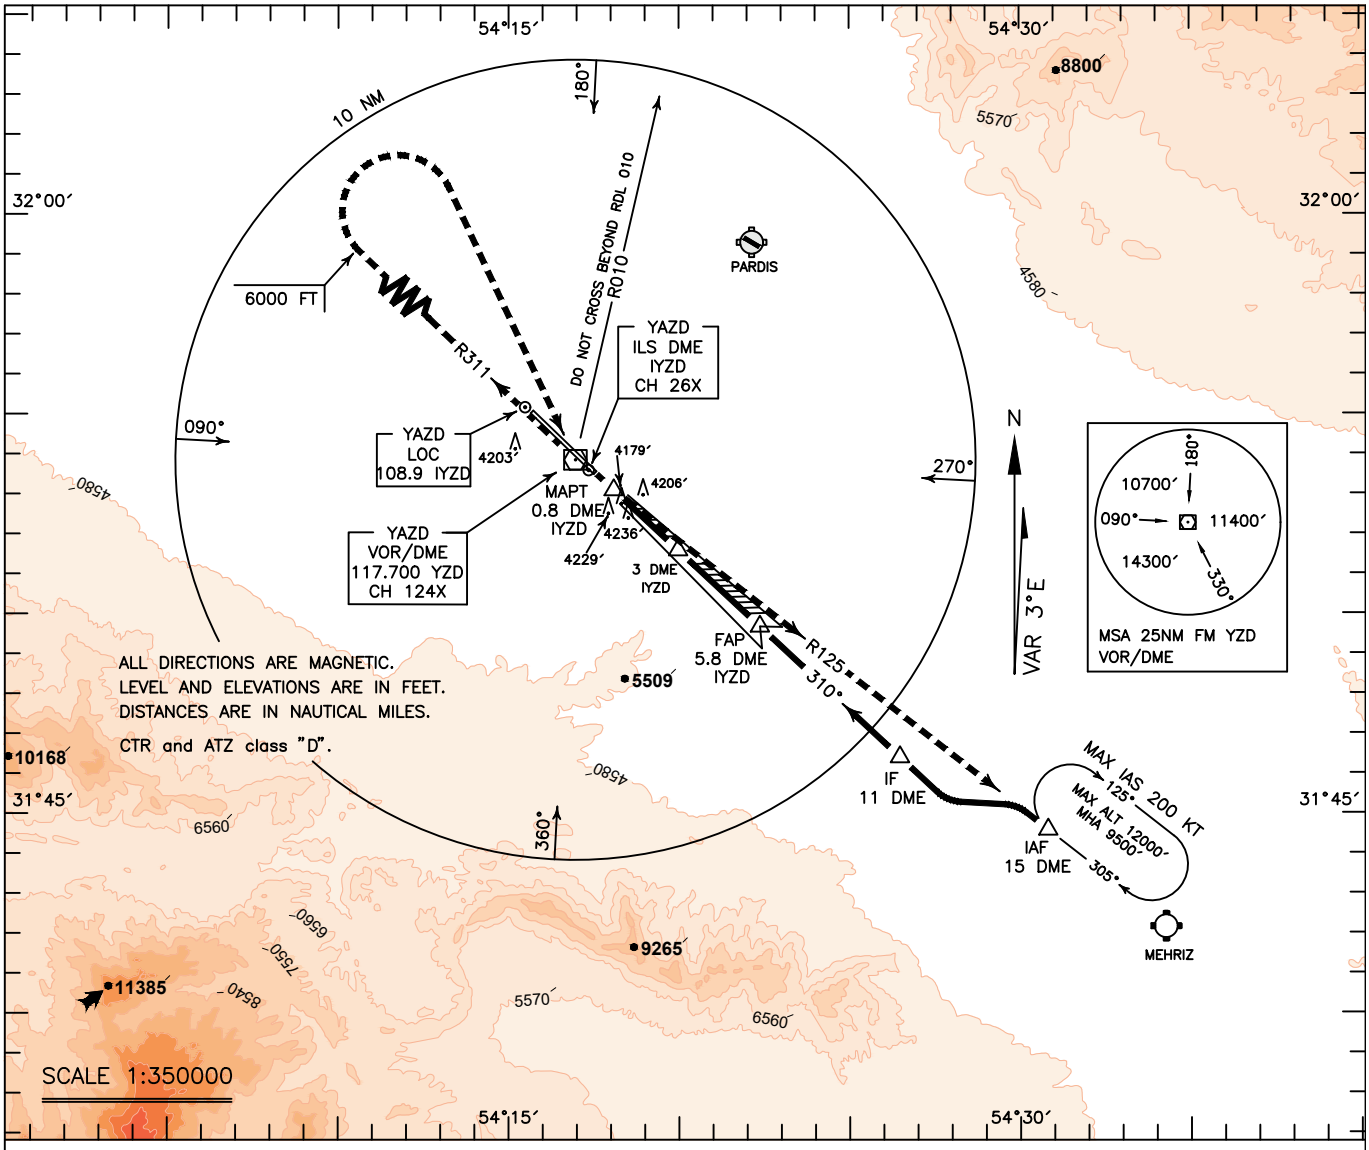

MISSED APPROACH: At 0.8 IYZD climb to overhead VOR/DME, then climb on RDL 311 to 6000 FT, then turn right to cross overhead VOR/DME, then turn left climb on RDL 125 rejoin HLDG at 9500 FT.

TA 12000′

NOTE:

1: To avoid high terrain, when proceeding to overhead, DO NOT CROSS BEYOND RDL 010.

2: Missed approach climb gradient: 2.7%

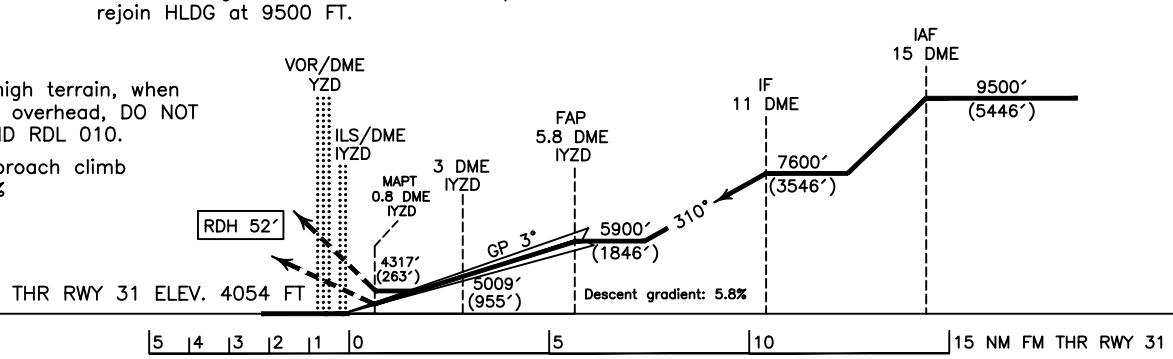

NOTE:

1- Circling not authorized clockwise between RDL 150 and 230 for CAT C,D.

2- Contour intervals are to be selected at 990 FT.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	4317′(263′)			
	LOC (GP INOP)	4630′(576′)			
Circling		4640′(586′)		4800′(746′)	