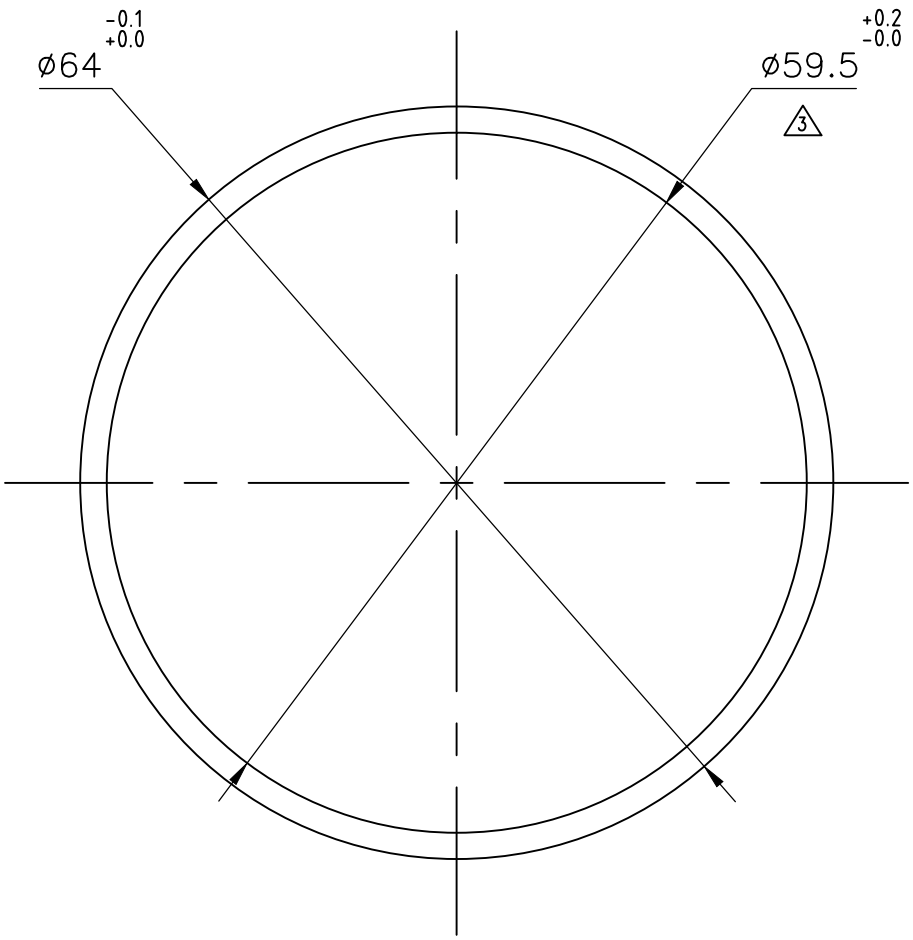

TOP VIEW

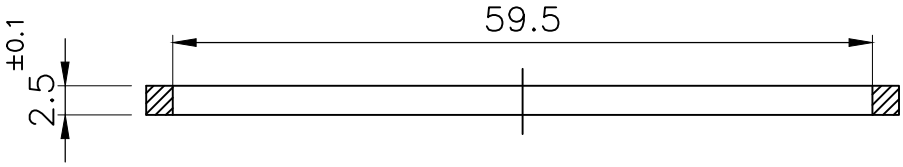

FRONT VIEW

NOTE:–

1. ALL DIMENSIONS ARE IN mm.
2. REMOVE ALL SHARP CORNERS & EDGES.
3. DIMENSIONS GIVEN IN ( ) ARE ONLY FOR REFERENCE.
4. ✱CRITICAL DIMENSIONS SHOULD BE MAINTAINED AS PER DRAWING.
5. ASK US IF ANY DOUBT. DO NOT ASSUME.

ERN NO	REV NO	DATE	MODIFICATION	DRAWN	APPD
03	3	20.02.2017	INNER DIAMETER CHANGE. ø59.2 TO ø59.5	SRP	ASG
02	2	04.10.2016	INNER DIAMETER CHANGE. ø60 TO ø59.2	SRP	BRT
01	1	17.06.2016	THICKNESS CHANGE.	VBK	BRT

	SIGN	DATE
DRAWN	VBK	22.12.2015
CHECKED	VBK	17.01.2016
APPD.	BRT	17.01.2016
SCALE : 1:1	SHEET : 1OF1	
WEIGHT (KG) :–		

MATERIAL:– UHMWPE

PROJ.

TITLE:– MTLL O–RING (BOX)

REV. 03

PETROSAFE SAFETY SYSTEMS
(DIVISION OF PETROMECH ENGG. PVT. LTD.)
OFFICE NO.-606, 6th FLOOR, SOUTH BLOCK, SACRED WORLD, WANOWARI, PUNE

DRG.NO. MTLL–018–MD–03

Surface Roughness Symbols

New	N12/	N11/	N9/	N6/	N3/	N6/ HRD	N6/ HRD & GRD
Old	~	▽	▽▽	▽▽▽	▽▽▽▽	▽	▽

For other Roughness Symbols & Values See IS:3073 (TS:11507)

M/cg Deviation for open Dimns. (Med. to IS: 2102)

Tolerance	Dims. Upto & Inc.	Over
±0.1	6	-
±0.2	30	6
±0.3	120	30
±0.5	315	120
±0.8	1000	315
±1.2	2000	1000
±2.0	4000	2000
±3.0	>4000	

(0.8/ 3.2/ 12.5/)

© "PEPL COPYRIGHT" NO PART OF THIS DRAWING MAY BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION OF COPY RIGHT OWNER.