
MORALT
the core of the door

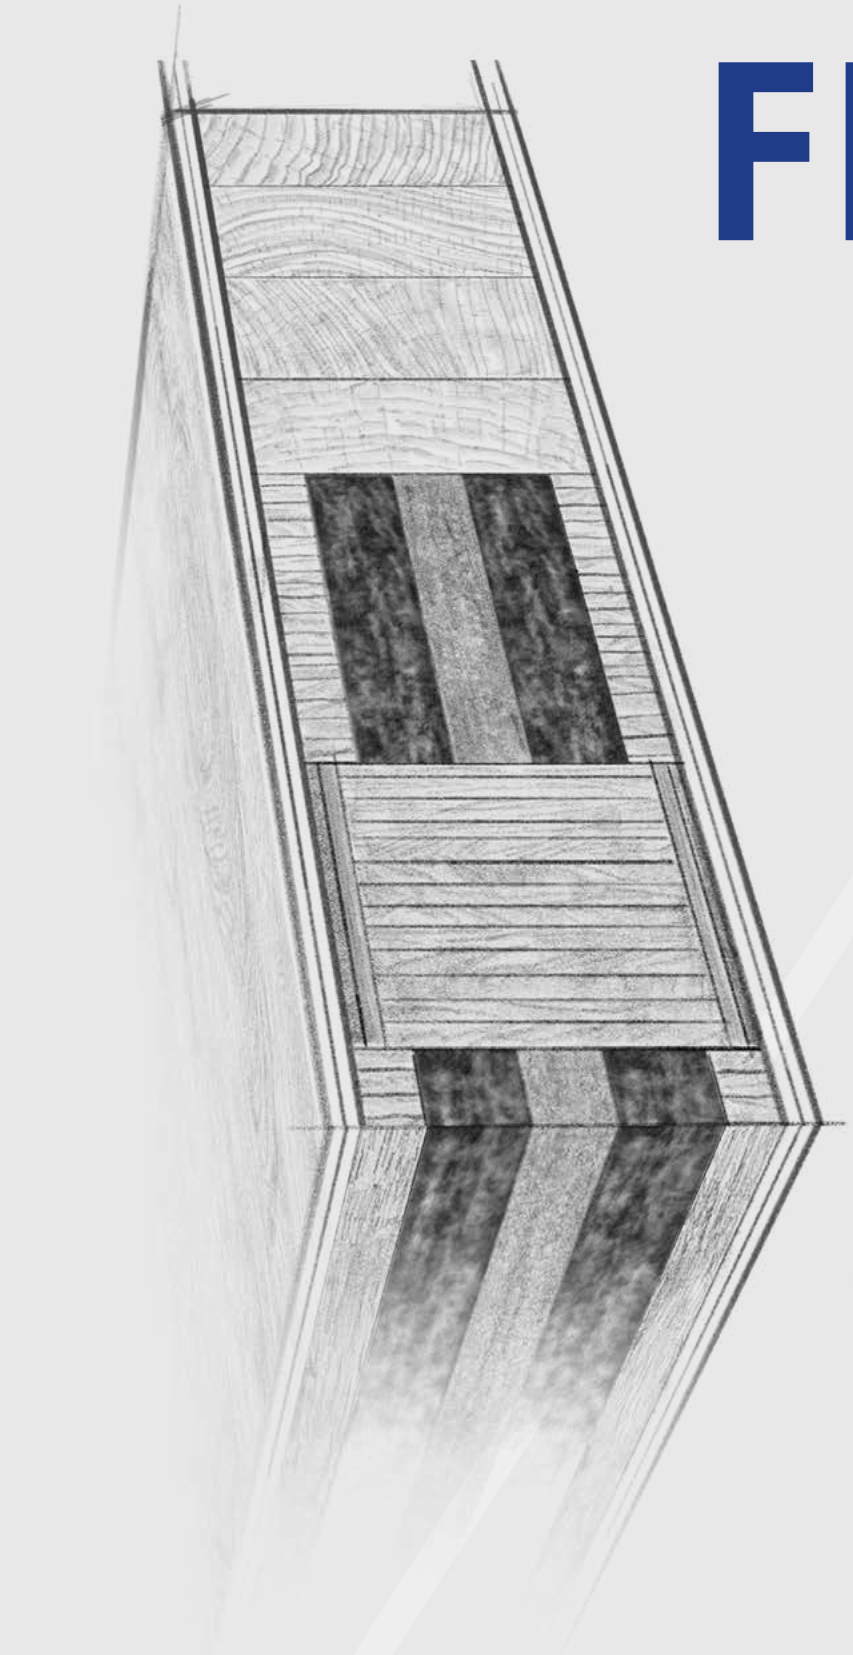

FERRO
Akustik

- 5-ply faces
- Exterior grade MDF facess
- Flat steel stabilizer
- Laminated core
- Robust construction
- Acoustic insulation


Made in Germany

www.moralt-ag.de


FERRO Akustik



Cross-section lock-side

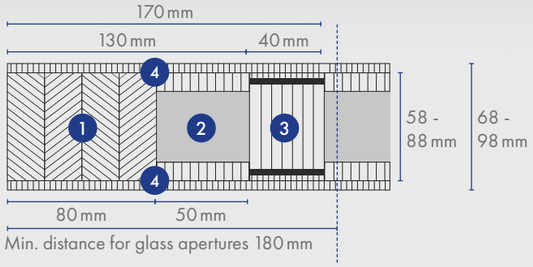

Cross-section hinge-side

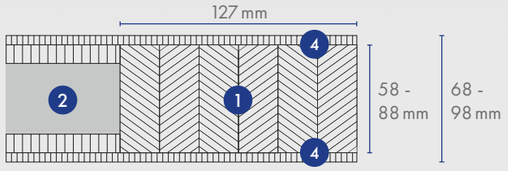

1 Framing / stiles & rails
2 Sandwich system with sound-insulation insert and wood-fibre insulation insert
3 Flat steel stabilizer
4 Facing

Technical details

FRAME

1 Timber framing	Timber framing finger-jointed and laminated.		
Frieze, trim, glass aperture		Thickness of door blank 68/78/88/ 98 mm	
		Frame width in mm	can be trimmed by
	Top	127	75*
	Side	lock-s. 80/hinge-s. 127	lock-s. 25*/hinge-s. 75*
	Bottom	127	85*
	Minimum distance for glass apertures is 180 mm.The frame width corresponds to the shortening dimension. When trimmed by a maximum at the bottom (85 mm) a single rebate (max. 18 mm) or fitting of drop down seal is possible.		

INNER LAYER

2 Construction	• Sandwich construction of laminated core and sound-insulation layers and wood-fibre insulation insert • Surface stability through vertically aligned annual rings
Bonding	Free of formaldehydew
3 Flat steel stabilizer	Lock-side flat steel stabilizer – thermally separated and sound insulated – to absorb tractive and shearing forces. Stabilizers are glued and friction-locked with the framework.


4 FACING

Bonding	Veneer plywood AW bonding according to DIN 68705-2, 5 layers (noble veneer), 3 layer (cross veneer) = individually veneerable, MDF/HDF exterior = paintable or veneerable, full-surface bonding with the overall construction, min. stress group D4 according to DIN EN 204/205 and DIN EN 14257 (WATT 91)

EXTERNAL DOOR BLANK

Model / finish	Trimmed edges and sanded surfaces
Processing information	The sound inlay can be processed with woodworking machines.

* with a max. rebate of 30 mm

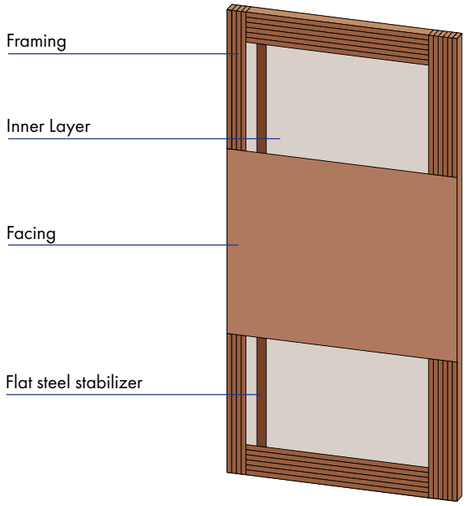

Product Range

Thickness in mm	68 / 78 / 88 / 98
Thickness in mm cross-veneered RV	66 / 76 / 86 / 96

Height in mm	default	can be cut to
	2,110	1,950
	2,240	2,080
	2,370	2,210
	2,470	2,310
	2,600	2,440

Maximum height of 2,980 mm availible on request.

Width in mm	default	can be cut to
	950	850
	1,050	950
	1,150	1,050
	1,230	1,130
	1,250**	1,150

Face types

Veneer plywood: Mahagony SV, Okumé/Gabun SV, Meranti FL, Oak*, knotty Oak*, knotty Oak 3.5mm*, rustic knotty Oak cross-veneered, Pine FL/ SV, Spruce FL/SV, Larch*, knotty Larch*, white Fir, paint-grade SV.
Or: MDF/HDF-exterior**, HPL/CPL laminate

Framing /stiles & rails

Oak, Larch, Conifer wood, Redwood

*cross-grain also available **Only MDF-Exterior possible up to a width of 1,250 mm SV=sliced veneer FL=Fineline RV=rotary cut veneer
Further dimensions, sizes and facings on request.

Certification

Height in mm		bis 2,600		Maximum door leaf size: 3.2 m²	
Width in mm		bis 1,250			
Thickness in mm		68	78	88	98
Climatic performance DIN EN 1121:2000-09		c, d, e			
Tolerance classes	EN 1530	4			
	EN 12219	3			
Thermal transfer coefficient U-value (W/m²K) DIN EN ISO 10077-2:2012-06		1.2	1.0	0.85	0.78
Acoustic performance DIN EN ISO 717-1 Rw_p(dB)		44	44	47	44
Burglar resistence DIN EN 1627:2011-09		RC2 / RC3*			
Weight 2,240 x 1,050 mm kg/piece		88	94	105	121

* tested & valid to H 2,470 mm

CNC-processing service

All types may be delivered CNC processed.

Any questions?

Info hotline: +49 8026 92538-11

Moralt AG
Obere Tiefenbachstraße 1
83734 Hausham, Germany

Phone: +49 8026 92538-0
Telefax: +49 8026 92538-40
Mail: sales@moralt-ag.de

The information provided reflects the current state of knowledge and does not constitute a guarantee of properties. Compliance with existing laws and regulations is the sole responsibility of the recipient of our products. Errors and technical modifications are subject to change. All information applies exclusively to products of Moralt AG.