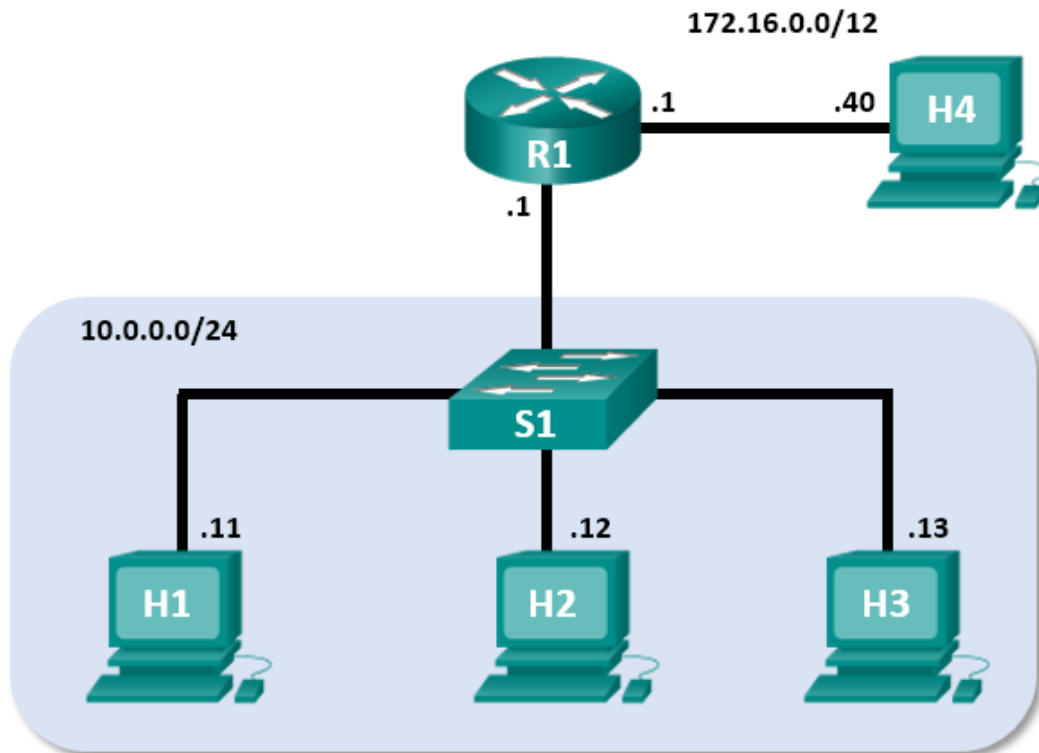# Lab – Using Wireshark to Examine Ethernet Frames

Mininet Topology

Objectives

Part 1: Examine the Header Fields in an Ethernet II Frame

Part 2: Use Wireshark to Capture and Analyze Ethernet Frames

Background / Scenario

When upper layer protocols communicate with each other, data flows down the Open Systems Interconnection (OSI) layers and is encapsulated into a Layer 2 frame. The frame composition is dependent on the media access type. For example, if the upper layer protocols are TCP and IP and the media access is Ethernet, then the Layer 2 frame encapsulation will be Ethernet II. This is typical for a LAN environment.

When learning about Layer 2 concepts, it is helpful to analyze frame header information. In the first part of this lab, you will review the fields contained in an Ethernet II frame. In Part 2, you will use Wireshark to capture and analyze Ethernet II frame header fields for local and remote traffic.

Required Resources

- CyberOps Workstation VM
- Internet Access

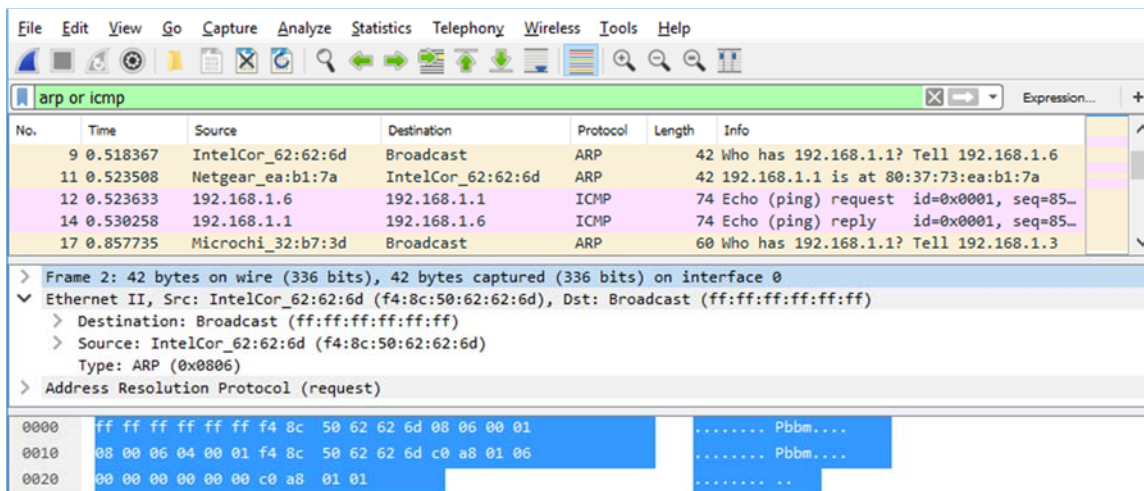## Part 1: Examine the Header Fields in an Ethernet II Frame

In Part 1, you will examine the header fields and content in an Ethernet II Frame provided to you. A Wireshark capture will be used to examine the contents in those fields.

Step 1: Review the Ethernet II header field descriptions and lengths.

Preamble	Destination Address	Source Address	Frame Type	Data	FCS
8 Bytes	6 Bytes	6 Bytes	2 Bytes	46 – 1500 Bytes	4 Bytes

Step 2: Examine Ethernet frames in a Wireshark capture.

The Wireshark capture below shows the packets generated by a ping being issued from a PC host to its default gateway. A filter has been applied to Wireshark to view the ARP and ICMP protocols only. The session begins with an ARP query for the MAC address of the gateway router, followed by four ping requests and replies.

Step 3: Examine the Ethernet II header contents of an ARP request.

The following table takes the first frame in the Wireshark capture and displays the data in the Ethernet II header fields.

Field	Value	Description
Preamble	Not shown in capture	This field contains synchronizing bits, processed by the NIC hardware.
Destination Address	Broadcast (ff:ff:ff:ff:ff:ff)	Layer 2 addresses for the frame. Each address is 48 bits long, or 6 octets, expressed as 12 hexadecimal digits, `0-9,A-F`.
Source Address	IntelCor_62:62:6d (f4:8c:50:62:62:6d)	A common format is `12:34:56:78:9A:BC`. The first six hex numbers indicate the manufacturer of the network interface card (NIC), the last six hex numbers are the serial number of the NIC. The destination address may be a broadcast, which contains all ones, or a unicast. The source address is always unicast.
Frame Type	0x0806	For Ethernet II frames, this field contains a hexadecimal value that is used to indicate the type of upper-layer protocol in the data field. There are numerous upper-layer protocols supported by Ethernet II. Two common frame types are: Value Description `0x0800`IPv4 Protocol `0x0806` Address resolution protocol (ARP)
Data	ARP	Contains the encapsulated upper-level protocol. The data field is between 46 – 1,500 bytes.
FCS	Not shown in capture	Frame Check Sequence, used by the NIC to identify errors during transmission. The value is computed by the sending machine, encompassing frame addresses, type, and data field. It is verified by the receiver.

What is significant about the contents of the destination address field?

_____

_____

Why does the PC send out a broadcast ARP prior to sending the first ping request?

_____

_____

_____

What is the MAC address of the source in the first frame? _____

What is the Vendor ID (OUI) of the Source's NIC? _____

What portion of the MAC address is the OUI? _____

What is the Source's NIC serial number? _____

Part 2: Use Wireshark to Capture and Analyze Ethernet Frames

In Part 2, you will use Wireshark to capture local and remote Ethernet frames. You will then examine the information that is contained in the frame header fields.

Step 1: Examine the network configuration of H3.

a. Start and log into your CyberOps Workstation using the following credentials:

Username: **analyst**   Password: **cyberops**

b. Open a terminal emulator to start mininet and enter the following command at the prompt. When prompted, enter **cyberops** as the password.

```
[analyst@secOps ~]$ sudo ./lab.support.files/scripts/cyberops_topo.py
[sudo] password for analyst:
```

c. At the mininet prompt, start terminal windows on host H3.

```
*** Starting CLI:
mininet> xterm H3
```

d. At the prompt on Node: h3, enter **ifconfig** to verify the IPv4 address and record the MAC address.

Host-interface	IP Address	MAC Address
H3-eth0		

e. At the prompt on Node: H3, enter **netstat -r** to display the default gateway information.

```
[root@secOps ~]# netstat -r
Kernel IP routing table
Destination     Gateway         Genmask         Flags   MSS Window  irtt Iface
default         10.0.0.1        0.0.0.0         UG        0 0          0 H3-eth0
10.0.0.0        0.0.0.0         255.255.255.0   U         0 0          0 H3-eth0
```

f. What is the IP address of the default gateway for the host H3? _____

Step 2: Clear the ARP cache on H3 and start capturing traffic on H3-eth0.

a. In the terminal window for Node: H3, enter **arp -n** to display the content of the ARP cache.

```
[root@secOps analyst]# arp -n
```

b. If there is any existing ARP information in the cache, clear it by enter the following command: **arp -d IP-address**. Repeat until all the cached information has been cleared.

```
[root@secOps analyst]# arp -n
Address                 HWtype  HWaddress           Flags Mask        Iface
10.0.0.11               ether   5a:d0:1d:01:9f:be   C                 H3-eth0

[root@secOps analyst]# arp -d 10.0.0.11
Address                 HWtype  HWaddress           Flags Mask        Iface
10.0.0.11                       (incomplete)        C                 H3-eth0
```

c. In the terminal window for Node: H3, open Wireshark and start a packet capture for H3-eth0 interface.

```
[root@secOps analyst]# wireshark-gtk &
```

Step 3: Ping H1 from H3.

a. From the terminal on H3, ping the default gateway and stop after send 5 echo request packets.

```
[root@secOps analyst]# ping -c 5 10.0.0.1
```

b. After the ping is completed, stop the Wireshark capture.

Step 4: Filter Wireshark to display only ICMP traffic.

Apply the **icmp** filter to the captured traffic so only ICMP traffic is shown in the results.

Step 5: Examine the first Echo (ping) request in Wireshark.

The Wireshark main window is divided into three sections: the Packet List pane (top), the Packet Details pane (middle), and the Packet Bytes pane (bottom). If you selected the correct interface for packet capturing in Step 3, Wireshark should display the ICMP information in the Packet List pane of Wireshark, similar to the following example.
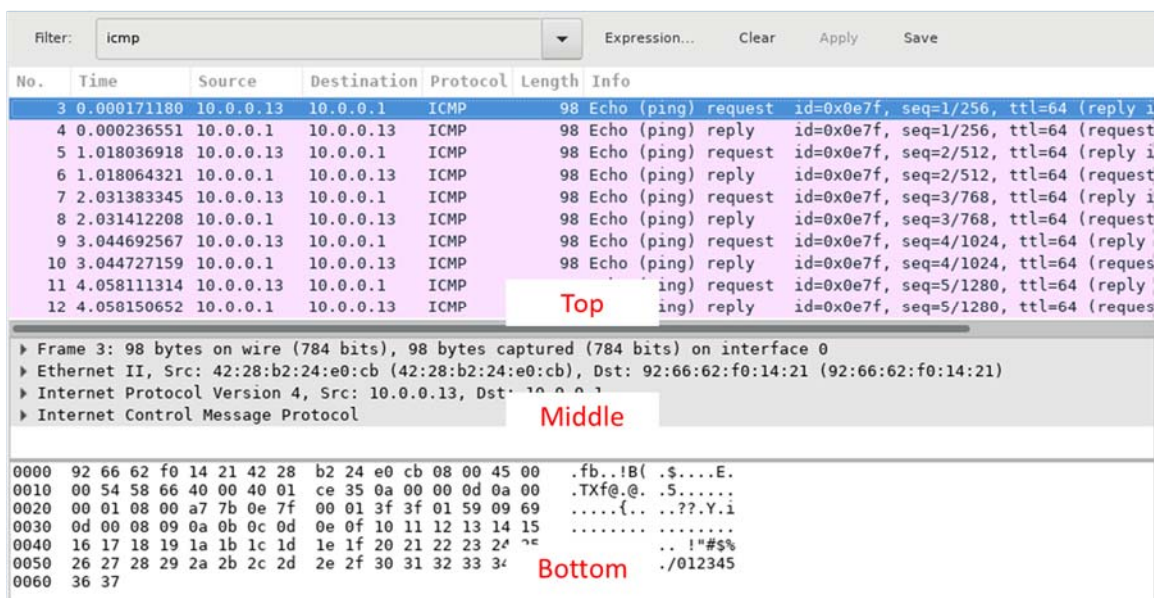
a. In the Packet List pane (top section), click the first frame listed. You should see **Echo (ping) request** under the **Info** heading. This should highlight the line blue.

b. Examine the first line in the Packet Details pane (middle section). This line displays the length of the frame; 98 bytes in this example.

c. The second line in the Packet Details pane shows that it is an Ethernet II frame. The source and destination MAC addresses are also displayed.

What is the MAC address of the PC's NIC? _____

What is the default gateway's MAC address? _____

d. You can click the arrow at the beginning of the second line to obtain more information about the Ethernet II frame.
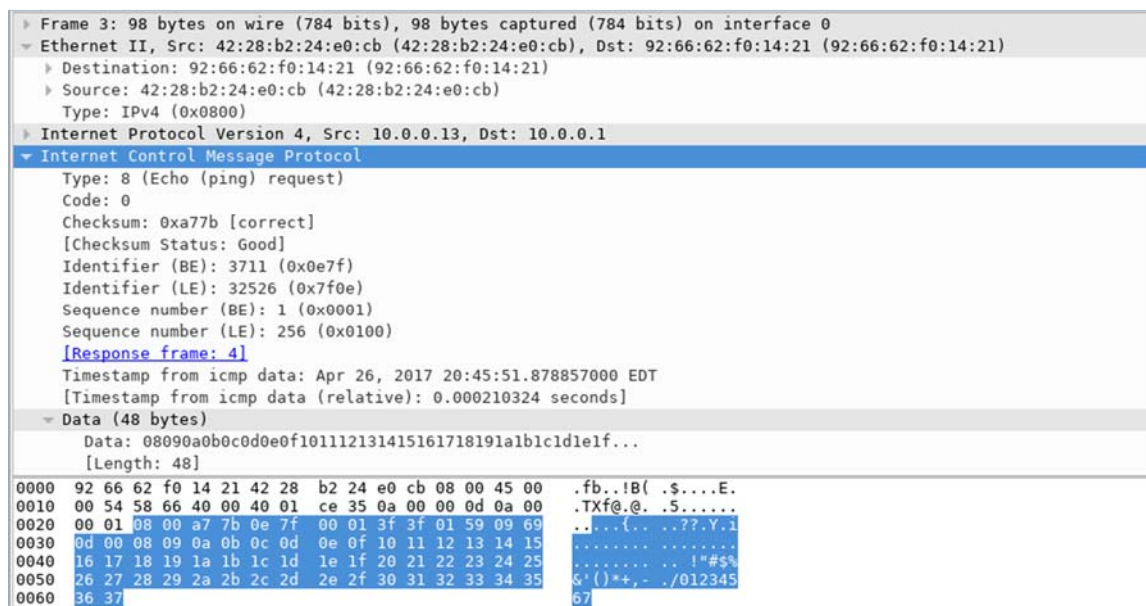
What type of frame is displayed? _____

e. The last two lines displayed in the middle section provide information about the data field of the frame. Notice that the data contains the source and destination IPv4 address information.

What is the source IP address? _____

What is the destination IP address? _____

f.   You can click any line in the middle section to highlight that part of the frame (hex and ASCII) in the Packet Bytes pane (bottom section). Click the **Internet Control Message Protocol** line in the middle section and examine what is highlighted in the Packet Bytes pane.

```
▶ Frame 3: 98 bytes on wire (784 bits), 98 bytes captured (784 bits) on interface 0
▼ Ethernet II, Src: 42:28:b2:24:e0:cb (42:28:b2:24:e0:cb), Dst: 92:66:62:f0:14:21 (92:66:62:f0:14:21)
    ▶ Destination: 92:66:62:f0:14:21 (92:66:62:f0:14:21)
    ▶ Source: 42:28:b2:24:e0:cb (42:28:b2:24:e0:cb)
      Type: IPv4 (0x0800)
▶ Internet Protocol Version 4, Src: 10.0.0.13, Dst: 10.0.0.1
▼ Internet Control Message Protocol
      Type: 8 (Echo (ping) request)
      Code: 0
      Checksum: 0xa77b [correct]
      [Checksum Status: Good]
      Identifier (BE): 3711 (0x0e7f)
      Identifier (LE): 32526 (0x7f0e)
      Sequence number (BE): 1 (0x0001)
      Sequence number (LE): 256 (0x0100)
      [Response frame: 4]
      Timestamp from icmp data: Apr 26, 2017 20:45:51.878857000 EDT
      [Timestamp from icmp data (relative): 0.000210324 seconds]
    ▼ Data (48 bytes)
        Data: 08090a0b0c0d0e0f101112131415161718191a1b1c1d1e1f...
        [Length: 48]
0000  92 66 62 f0 14 21 42 28  b2 24 e0 cb 08 00 45 00   .fb..!B( .$....E.
0010  00 54 58 66 40 00 40 01  ce 35 0a 00 00 0d 0a 00   .TXf@.@. .5......
0020  00 01 08 00 a7 7b 0e 7f  00 01 3f 3f 01 59 09 69   .....{.. ..??.Y.i
0030  0d 00 08 09 0a 0b 0c 0d  0e 0f 10 11 12 13 14 15   ........ ........
0040  16 17 18 19 1a 1b 1c 1d  1e 1f 20 21 22 23 24 25   ........ .. !"#$%
0050  26 27 28 29 2a 2b 2c 2d  2e 2f 30 31 32 33 34 35   &'()*+,- ./012345
0060  36 37                                              67
```

g.   Click the next frame in the top section and examine an Echo reply frame. Notice that the source and destination MAC addresses have reversed, because this frame was sent from the default gateway router as a reply to the first ping.

What device and MAC address is displayed as the destination address?

_____

Step 6:   Start a new capture in Wireshark.

a.   Click the **Start Capture** icon to start a new Wireshark capture. You will receive a popup window asking if you would like to save the previous captured packets to a file before starting a new capture. Click **Continue without Saving**.

b.   In the terminal window of Node: H3, send 5 echo request packets to 172.16.0.40.

c.   Stop capturing packets when the pings are completed.

Step 7:   Examine the new data in the packet list pane of Wireshark.

In the first echo (ping) request frame, what are the source and destination MAC addresses?

Source: _____

Destination: _____

What are the source and destination IP addresses contained in the data field of the frame?

Source: _____

Destination: _____

Compare these addresses to the addresses you received in Step 5. The only address that changed is the destination IP address. Why has the destination IP address changed, while the destination MAC address remained the same?

_____

_____

_____

_____

Reflection

Wireshark does not display the preamble field of a frame header. What does the preamble contain?

_____

_____