

RECEIVING REPORT

Receiver No.: 18498511

Document Date: 04/30/2025

P.O.#: 5300130329

Posting Date: 04/30/2025

Item #: 2

Expiration Date:

Batch#: ACE0129357

Insp. Lot: 000001310031

Plant: ACE

Plant Description: Clearfield-Solumina

Vendor Name: HEXCEL CORP

Vendor Addr: 1913 N KING ST

SEGUIN

TX 78155

Quality Inspection

Unloading Point:

Vendor No.: 90069901

Buyer Name: Keith Larsen

SQAR Code:

Project ID: ASBUX

Test Lab:

WBS:

Inspection Lot/Type:

Rev No.: 01

Material: MSRR4040-VAFR

Received UOM: LB

Base UOM: LB

Base UOM Received Qty: 527.270

Vendor Mtl. Number:

Mtl.Description: SATIN WEAVE CARBON FIBRE REINFORCED BISM

Mtl.Specification:

Alt. Material #:

Matl. Basic Data Text:

MSRR4040-VAFR:SATIN WEAVE CARBON FIBRE REINFORCED BISM

Bill of Lading: 92SPS055644

Delivery Note: 92SPS055644

Receipt Created by: N50973

Received Qty: 527.270

Head text:

Receipt Delivered To: _____

WAREHOUSE INFORMATION



Plt: ACE



Part Number: MSRR4040-VAFR



Qty: 527.27



Receiver No: 18498511

Storage Bin:



Order Number:

Warehouse: LIN1



Stock Type: Q



WBS Element: A-46Z01-NW.N46Z01000713

Inventory WBS: Y-ROLLS

Bin:

Storage Location: ACED

Item Text:

SATIN WEAVE CARBON FIBRE REINFORCED BISMALEIMIDE PREIMPREGN
ATTENTION: The revision level for this part is: 4
NG PROJECT: 46001.IN.INV.0RAW, PRIME CONTRACT:
Ship via: Best Way.

Qty. Insp.	Insp. Stamp No.	By Inspector	Qty. Rej.
Rej. No.	Stocked By	Date Stkd.	Stk. Loc.



29 April 2025

CERTIFICATE OF ANALYSIS

Customer: Northrop Grumman Systems Corporation

Purchase Order No: 5300130329 Part Number: MSRR4040-VAFR

Material: F3C 433/M65: 38%; 285AW; 50"

Specification: MSRR4040, Issue 4, dated November 2012.

Certificate of Conformance: Hexcel lot 92M0103858 has been manufactured and tested in conformance with specification MSRR4040, Issue 4, dated November 2012.

Lot No: 92M0103858 Date of Manufacture: 12 April 2025

Storage Life: 12 months from date of manufacture when stored at 0°.

Resin Lot No: 92M0103522 Manufactured by: Hexcel

Glass Lot No: 31W0026929 Manufactured by: Hexcel

- I. Prepreg Physical, Chemical and Mechanical Properties
See Certificate of Analysis Report.
- II. Individual Spool Physical Properties
See In Process Control Acceptance Testing Data.

Note: See Packing List for date of shipment, actual quantity and spools shipped.

Brandi Bond



Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
Configuration Number: CN1301
Material Type: F3C 433/M65;38%;285AW;50"
Lot Number: 92M0103858
Order Number: 92M0103858

Report Printed: 19-Apr-2025 7:50:35PM
Status: PASS
Approval: KORPIAJ

1. Tensile, SBS, and TG Panel

Dimensional Fiber Volume

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	Laminate Density By Immersion Avg (g/cc)		1.5129
	)		
	Laminate Density By Immersion Std (g/cc)		0.0041
	Laminate Density By Immersion CoV		0.27
	Dimensional Fiber Volume (%)		53.48 - 54.67 - 53.98
	Dimensional Fiber Volume Avg (%)	50 - 56	54
	Dimensional Fiber Volume Std (%)		0.598
	Dimensional Fiber Volume CoV		1.11
	Void Volume (%)		1.0 - 1.0 - 1.3
	Void Volume Avg (%)	MAX= 2	1
	Void Volume Std (%)		0.169
	Void Volume CoV		15.81

Short Beam Shear Stress-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	SBS Strength (MPa)		80.7 - 85.5 - 88.0 - 85.2 - 88.2
	SBS Strength Avg (MPa)	MIN= 65	86
	SBS Strength Std (MPa)		3.03
	SBS Strength CoV		3.54

Short Beam Shear Stress-Warp-150C(302F)

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	SBS Strength (MPa)		67.8 - 66.3 - 67.4 - 66.3 - 69.0
	SBS Strength Avg (MPa)	MIN= 50	67
	SBS Strength Std (MPa)		1.14
	SBS Strength CoV		1.69

Tg By DMA

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	Tg by DMA in °C (° C)		274.7
	Tg by DMA in °C Avg (° C)	MIN= 225.0	274.7



Matrix Testing Laboratory
5400 S. 6700 W
West Valley City, Utah
84118

Certificate of Analysis Report

Specification: **MSRR4040 Rev. Issue 4**
Configuration Number: **CN1301**
Material Type: **F3C 433/M65;38%;285AW;50"**
Lot Number: **92M0103858**
Order Number: **92M0103858**

Report Printed: 19-Apr-2025 7:50:35PM
Status: **PASS**
Approval: **KORPIAJ**

Calculated Thickness/Ply

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	Calculated Thickness/Ply Avg (mm)	0.28 - 0.32	0.30
	Calculated Thickness/Ply StDev (mm)		0.0025
	Calculated Thickness/Ply CoV		1.08

Tensile Stress, Modulus, and Elongation-Warp-Ambient

Roll/Panel	Test/Result:	Requirements:	Values:
92M0103858001/001	Norm Tensile Strength (MPa)		989.4 - 965.9 - 968.0 - 1003.4 - 978.4
	Norm Tensile Strength Avg (MPa)	MIN= 700	981
	Norm Tensile Strength Std (MPa)		15.64
	Norm Tensile Strength CoV		1.59
	Norm Modulus (GPa)		64.2 - 64.1 - 62.1 - 63.0 - 63.8
	Norm Modulus Avg (GPa)	MIN= 55	63
	Norm Modulus Std (GPa)		0.876
	Norm Modulus CoV		1.38

2. PHYSICAL PROPERTIES

Volatile content @100°C in pan

Roll	Test/Result:	Requirements:	Values:
92M0103858001	Volatile content @100°C in a Pan (%)		0.5 - 0.5
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	0
92M0103858006	Volatile content @100°C in a Pan (%)		0.4 - 0.5
	Volatile content @100°C in a Pan Avg (%)	MAX= 1	0

3. PHYSICAL TACK

Tack

Roll	Test/Result:	Requirements:	Values:
92M0103858001	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30

Certificate of Analysis Report

Specification: MSRR4040 Rev. Issue 4
 Configuration Number: CN1301
 Material Type: F3C 433/M65;38%;285AW;50"
 Lot Number: 92M0103858
 Order Number: 92M0103858

Report Printed: 19-Apr-2025 7:50:35PM
 Status: **PASS**
 Approval: **KORPIAJ**

Tack (Continued)

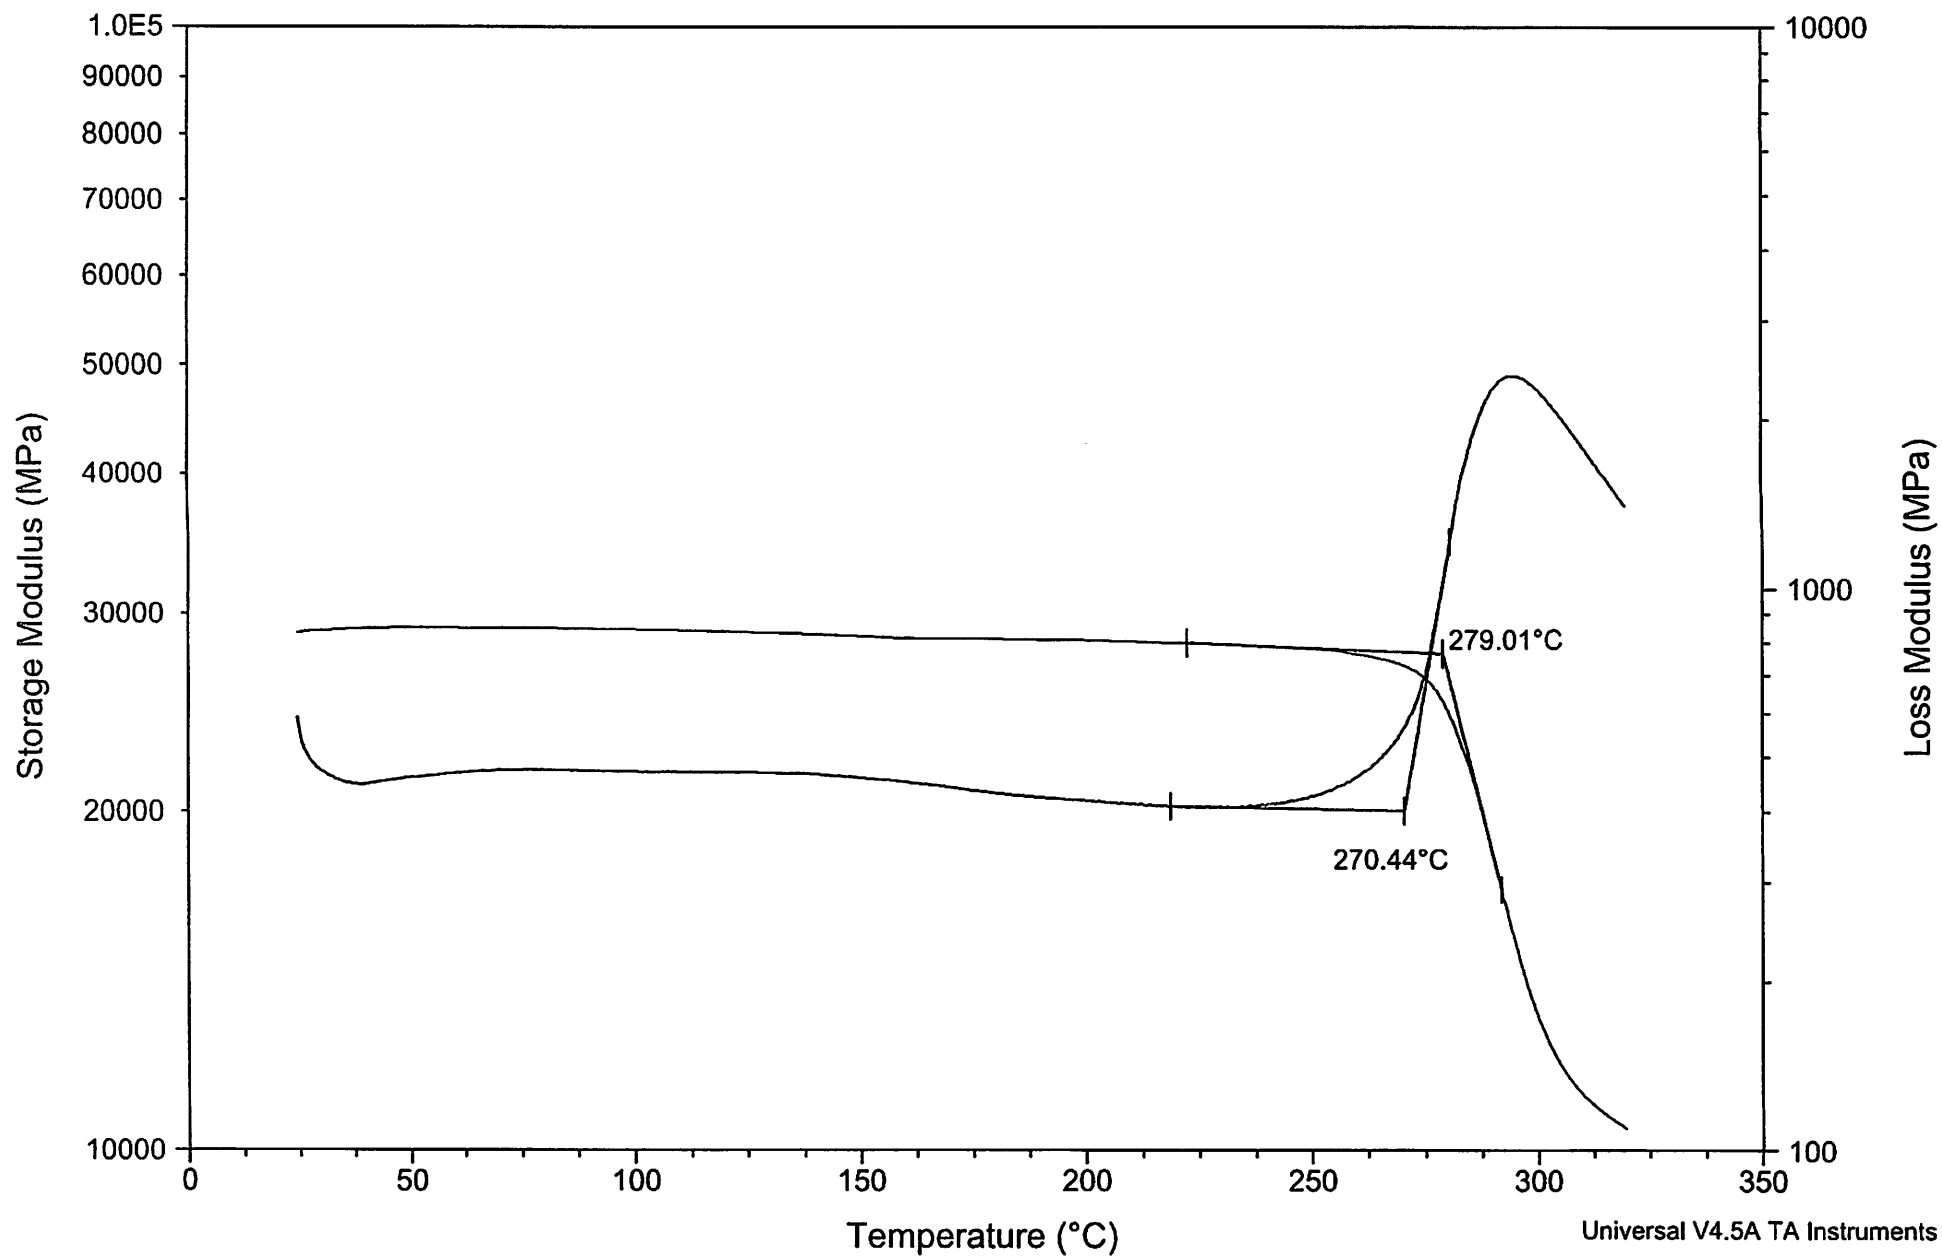
Roll	Test/Result:	Requirements:	Values:
92M0103858003	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30
92M0103858005	Tack Time to Failure (min.)	MIN= 30	30 - 30
	Tack Time to Failure Avg (min.)	MIN= 30	30

End of report

Sample: 92M0103858-001 SP#001
Size: 34.9200 x 9.9600 x 2.3900 mm
Method: Temperature Ramp

DMA

File: \\...\\DMA Q800-2357\\M65\\92M0103858.001
Operator: ak
Run Date: 19-Apr-2025 11:05
Instrument: DMA Q800 V21.3 Build 96



IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

RC / AWT Report for lot: 92M0103858

4/25/2025

Page 1 of 2

Spool	Re - test	Rep	Init - Weight	Final Weight	RC	AWT	PAW	Width	Stat.	Tech	Date
92M 0103858001	0	1	4.6174	2.8449	38.4	284	461.7			CAZAREYX	04/12/2025
		2	4.6446	2.8491	38.7	285	464.5			CAZAREYX	04/12/2025
		3	4.6115	2.8555	38.1	286	461.2			CAZAREYX	04/12/2025
		Avg.	4.6245		38	285	462	50.30	A	CAZAREYX	04/12/2025
92M 0103858002	0	1	4.6088	2.8724	37.7	287	460.9			CAZAREYX	04/12/2025
		2	4.6275	2.8541	38.3	285	462.8			CAZAREYX	04/12/2025
		3	4.5900	2.8421	38.1	284	459.0			CAZAREYX	04/12/2025
		Avg.	4.6088		38	286	461	50.30	A	CAZAREYX	04/12/2025
92M 0103858003	0	1	4.5990	2.8215	38.6	282	459.9			CAZAREYX	04/12/2025
		2	4.6132	2.8333	38.6	283	461.3			CAZAREYX	04/12/2025
		3	4.6123	2.8290	38.7	283	461.2			CAZAREYX	04/12/2025
		Avg.	4.6082		39	283	461	50.03	A	CAZAREYX	04/12/2025
92M 0103858004	0	1	4.6496	2.8394	38.9	284	465.0			CAZAREYX	04/12/2025
		2	4.6765	2.8421	39.2	284	467.6			CAZAREYX	04/12/2025
		3	4.6531	3.0923	33.5	309	465.3			CAZAREYX	04/12/2025
		Avg.	4.6597		37	292	466	50.30	A	CAZAREYX	04/12/2025
92M 0103858005	0	1	4.5954	2.8246	38.5	282	459.5			CAZAREYX	04/12/2025
		2	4.6208	2.8377	38.6	284	462.1			CAZAREYX	04/12/2025
		3	4.5601	2.8353	37.8	284	456.0			CAZAREYX	04/12/2025
		Avg.	4.5921		38	283	459	50.30	A	CAZAREYX	04/12/2025
92M 0103858006	0	1	4.5668	2.8357	37.9	284	456.7			CAZAREYX	04/12/2025
		2	4.5799	2.8667	37.4	287	458.0			CAZAREYX	04/12/2025
		3	4.5898	2.8471	38.0	285	459.0			CAZAREYX	04/12/2025
		Avg.	4.5788		38	285	458	50.30	A	CAZAREYX	04/12/2025

IN PROCESS CONTROL

ACCEPTANCE TESTING DATA

Lot Averages Report for Lot: **92M0103858**

04/25/2025

Page 2 of 2

Spool	Retest:	RC	AWT	PAW	Stamp
92M0103858001	0	38	285	462	A
92M0103858002	0	38	286	461	A
92M0103858003	0	39	283	461	A
92M0103858004	0	37	292	466	A
92M0103858005	0	38	283	459	A
92M0103858006	0	38	285	458	A
Averages:		38.1	285.7	461.0	



Product Certification

Page 1 of 3

COA Number:	SEG-COA-28153	Prod Order:	DOM:	Description:
Version:	1	31W0026929	13-Mar-2025	F3C433(FBL2)-50"
Issue Date:	31-Mar-2025	Weave Pattern:	5 Harness Satin	

Specifications

F3C433(FBL2) - GREIGE - 50Inch - HRMS 111546 Rev. 5 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex
F3C433(FBL2) - GREIGE - 50Inch - MSRR4040 Issue 4 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex
F3C433(FBL2) - GREIGE - 50Inch - MSRR9992 Issue 12 Warp Yarn HTA40 E13 3K 200tex Fill Yarn HTA40 E13 3K 200tex


Rolls Tested

Fabric Testing Results

Serial#:	Prod Order:	Property:	Specification:	Result:
31G0000356918	31W0026929	Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000356921		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.4
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000356922		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	286
31G0000356923		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000356924		Width	49.5 - 50.5 In	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 2 of 3

31G0000356924	31W0026929	Dried FAW Avg	278 - 292 g/m ²	286
31G0000356925		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	286
31G0000356926		Width	49.5 - 50.5 in	50.1
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000356927		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000356928		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000356929		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.6
		Dried FAW Avg	278 - 292 g/m ²	284
31G0000356930		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.9
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	287
31G0000356931		Width	49.5 - 50.5 in	50.2
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.4
		Dried FAW Avg	278 - 292 g/m ²	286
31G0000356932		Width	49.5 - 50.5 in	50.3
		Ends per inch	17.0 - 18.5 Yarns Per Inch	17.7
		Picks per inch	17.0 - 18.5 Yarns Per Inch	17.5

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician



Product Certification

Page 3 of 3

31G0000356932	31W0026929	Dried FAW Avg	278 - 292 g/m ²	283
31G0000356933		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.8
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	285
31G0000356934		Width	49.5 - 50.5 in	50.2
		Ends per Inch	17.0 - 18.5 Yarns Per Inch	17.7
		Picks per Inch	17.0 - 18.5 Yarns Per Inch	17.5
		Dried FAW Avg	278 - 292 g/m ²	283

Certification Exceptions/Additional Information


QMS07045, REV. 1, SEC. 5E

WARP: 240920210

FILL: 230920220

This is to certify that material shipped against this order meets the specification(s) listed above.

This report should only be reproduced in its entirety
1913 N. King Street, Seguin, TX 78155
Telephone (830) 379-1580 Fax (830) 379-3814
www.hexcel.com


Michael Galvan
Certification Technician

TEIJIN

TEIJIN CARBON AMERICA, INC.

121 Gardiff Valley Road
Rockwood, TN 37854
Tel. (885) 354-8408.
Fax (885) 354-8409

Certificate of Analysis

QAP 004J2 Rev M

Customer: Hexcel Reinforcement Corp (TX)	Contact: Patrick Spieckermann; Amy Shehane; Jerry Tschoepe; Greg Early	Email/Fax: Patrick.Spieckermann@hexcel.com; amy.shehane@hexcel.com; jerry.tschoepe@; Greg.Early@
CustomerPO#: 31PO0013018-1	Order: 58424	Ship Date: 3/18/2024
Customer P/N: C190S820N1	Product: Tenax™-E HTA40 E18 3K 200tex	
Part Number: G305303	Quantity: 1176.3 lb	Certifies To: MS-X-CTC-105 Rev B; MSRR9317/11 Issue 1
Lot Number: 230920220		

We are pleased to advise that the product (s) listed above has been released for shipment. We certify that this lot of Carbon Fiber has been tested by standard test methods and determined to have the following properties:

	Average	CV%
Tensile Strength, MPA (ksi):	4288.0 (619)	3.3
Tensile Modulus, GPa (msi):	237.5 (34.4)	1.0
Elongation, %:	1.70	3.3
Linear Density (without size), g/m:	0.2013	0.7
Size, %:	1.28	6.9
Fiber Density, g/cc:	1.77	
Filament Diameter, µm:	7	
Twist, turn/m:	Never Twisted	
Date of Manufacture:	September 2023	
Manufacturing Location:	Oberbruch, Heinsberg, Germany	

Quality Assurance

3/13/2024

These commodities, technology or software are controlled by U. S. Export Administration Regulation. Diversion contrary to U. S. Law is prohibited.

If goods are not received in a reasonable time or if there are any questions, please call 1-800-252-3001 (or (885) 354-8408).
Teijin Carbon America, Inc. 121 Gardiff Valley Road, Rockwood, TN 37854.



TEIJIN CARBON AMERICA, INC.

121 Cardiff Valley Road
Rockwood, TN 37854
Tel. (865) 354-8408
Fax (865) 354-8408

Certificate of Analysis

QAP 004.72 Rev M

Customer: Haxcel Reinforcement Corp (TX) Contact: Patrick Spleckermann;
Amy Shehane; Jerry Email/Fax: Patrick.Spleckermann@haxcel.com;
Tschoepe; Greg Early amy.shehane@haxcel.com;
jerry.tschoepe@; Greg.Early@

CustomerPO#: 31PO0013688 RELEASE 1 Order: SH001361 Ship Date: 3/5/2025


Customer P/N: n/a Product: Tenax™-E HTA40 E13 3K 200tax

Part Number: G305303 Quantity: 3000.000 kg Certifies To: MS-X-CTC-105 Rev B; MSRR9317/11
Issue 1

Lot Number: 240920210

We are pleased to advise that the product (s) listed above has been released for shipment. We certify that this lot of Carbon Fiber has been tested by standard test methods and determined to have the following properties:

	<u>Average</u>	<u>CV%</u>
Tensile Strength, MPA (kai):	4213.2 (611)	3.8
Tensile Modulus, GPA (mai):	238.1 (34.5)	0.9
Elongation, %:	1.67	3.7
Linear Density (without size), g/m:	0.2003	0.8
Size, %:	1.28	7.5
Fiber Density, g/cc:	1.77	
Filament Diameter, µm:	7	
Twist, turn/m:	Never Twisted	
Date of Manufacture:	September 2024	
Manufacturing Location:	Oberbruch, Heinsberg, Germany	


Quality Assurance 3/3/2025

These commodities, technology or software are controlled by U. S. Export Administration Regulation. Diversion contrary to U. S. Law is prohibited.

If goods are not received in a reasonable time or if there are any questions, please call 1-800-252-3001 (or (865) 354-8408).
Teijin Carbon America, Inc. 121 Cardiff Valley Road, Rockwood, TN 37854.

ROLL CONDITION LOG

Batch Number 92M0103858	Serial Number 92M0103858001	Fiber F3C433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
257	50	132	45.8	CURED RESIN

Final Footage 272	Net Feet 261	Credit Method A	Defect % 4.044%	Date 4/12/2025
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 4/12/2025
---	--------------------------

ROLL CONDITION LOG

Batch Number 92M0103858	Serial Number 92M0103858002	Fiber F3C433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
122	50	24	8.3	RESIN LEAN

Final Footage 229	Net Feet 227	Credit Method A	Defect % 0.873%	Date 4/12/2025
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 4/12/2025
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0103858	92M0103858003	F3C433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
126	50	1	0.3	SLUB
198	50	72	25.0	CURED RESIN

Final Footage	Net Feet	Credit Method	Defect %	Date
218	211	A	2.791%	4/12/2025

Inspection Stamp	Date
	4/12/2025

ROLL CONDITION LOG

Batch Number 92M0103858	Serial Number 92M0103858004	Fiber F3C433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
73	50	0	0.0	FUZZBALL

Final Footage 229	Net Feet 229	Credit Method A	Defect % 0.000%	Date 4/12/2025
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------

Inspection Stamp 	Date 4/12/2025
--	--------------------------

ROLL CONDITION LOG

Batch Number 92M0103858	Serial Number 92M0103858005	Fiber F3C433	Resin M65	Prepreg Width 50
-----------------------------------	---------------------------------------	------------------------	---------------------	----------------------------

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
116	50	1	0.3	SLUB

Final Footage 212	Net Feet 211	Credit Method A	Defect % 0.039%	Date 4/12/2025
-----------------------------	------------------------	---------------------------	---------------------------	--------------------------


Inspection Stamp 	Date 4/12/2025
---	--------------------------

ROLL CONDITION LOG

Batch Number	Serial Number	Fiber	Resin	Prepreg Width
92M0103858	92M0103858006	F3C 433	M65	50

Feet From Start	Defect Width (inches)	Defect Length (inches)	Credit Amount (sq. ft.)	Defect Type Remarks
193	50	120	41.7	WRINKLES
205	50	36	12.5	WRINKLES

Final Footage	Net Feet	Credit Method	Defect %	Date
224	211	A	5.804%	4/12/2025

Inspection Stamp	Date
 	4/12/2025