

FG16OH2M16


CPR CLASS: EN 50575:2014+A1:2016 Cca-s1a,d0,a1

Application

Multi-core LSZH shielded power cable, compliant with CPR EU 305/11, designed to limit the spread of fire and smoke. Suitable for high fire risk areas with a high presence of people (such as schools, offices, theaters, hospitals). The shield provides protection against electromagnetic interference. Must be protected from UV rays if stored or laid outdoors. Buried laying (direct and with protection) is allowed.

Marking

<meters> CE 0987 SPECIALCAVI BALDASSARI FG16OH2M16 <formation> 0,6/1kV IEC 60332-3-24 CCA-S1A,D0,A1 <lot> <year>

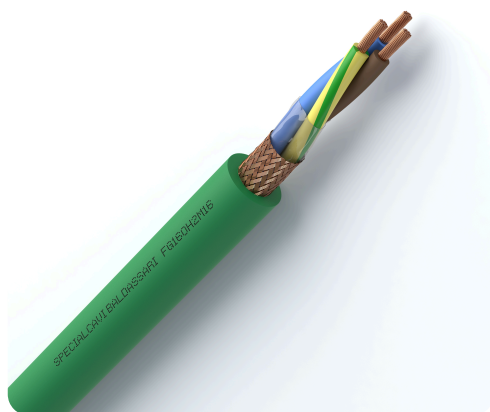

The product render is for illustration only.
 Copyright Specialcavi Baldassari S.r.l. (C.F. 01387320466) – all rights reserved.

Manufacturing characteristics

Conductor: bare copper class 5 flexible, according to CEI 20-29 EN IEC 60228
Insulation: hard grade ethylene propylene rubber (HEPR) compound, G16 type, according to CEI 20-11
Wrapping and protection: polyester tape
Screen: bare copper braid
Outer sheath: LSZH thermoplastic compound, M16 type, according to CEI 20-11
Outer sheath colour: green, based on RAL 6024
Cable geometry: round

On request

- Custom cores and outer sheath colouring

Reaction to fire - EN 13501-6

Reaction to fire according to EN 13501-6: Class
Cca

Reaction to fire according to EN 13501-6: Smoke production
s1a

Reaction to fire according to EN 13501-6: Flaming droplets/particles
d0

Reaction to fire according to EN 13501-6: Acidity
a1

Specify standards

Product standard

Rubber insulated cables with rated voltage between 1 kV and 30 kV: CEI 20-13 P.Q.A.

CPR standard for reaction to fire

Common test methods for cables under fire conditions - Heat release and smoke production measurement on cables during flame spread test: EN 50399

Electrical characteristics

Nominal voltage U_0 :

- 600V

Nominal voltage U :

- 1000V

Sheath operating voltage:

- 600/1000V

Test voltage:

- 4,0kV 50Hz A.C. (5 min) c-c
- 3,0kV 50Hz A.C. (1 min) c-s

Maximum voltage:

- U_0/U 1800/1800V D.C.
- U_0/U 693/1200V A.C.

Minimum insulation resistance:

- >200M Ω xKm

Temperatures

Permitted cable outer temperature during assembling/handling

0°C

Operating temperature range

-30°C | +90°C

Maximum conductor temperature

+90°C

Maximum short-circuit temperature

+250°C

Product characteristics

Flame retardant	IEC 60332-1-2	✓
	IEC 60332-3-21 (Cat A F/R)	✗
	IEC 60332-3-22 (Cat A)	✗
	IEC 60332-3-23 (Cat B)	✗
	IEC 60332-3-24 (Cat C)	✓
	IEC 60332-3-25 (Cat D)	✓
Low smoke	EN IEC 61034-2	✓
Halogen Free	EN IEC 60754-1	✓
	EN IEC 60754-2	✓
	EN IEC 60754-3	✗

Oil resistant	EN IEC 60811-404	✓
Low temperature resistant	EN 60811-504+505+506	✓
UV resistant		✗
Ozone resistant		✗
Hydrocarbons resistant	ENI 181	✓
Fire resistant	IEC 60331-1 (diameter > 20 mm) or EN 50200 (diameter < 20 mm)	✗
Presence of water	HD 60364-5-54:2009	AD7
Impact resistant	HD 60364-5-54:2009	✗

Laying conditions

 FIXED LAYING ✓	 INDOOR LAYING ✓	 LAYING IN AIR WITH PROTECTION ✓	 MAXIMUM TENSILE STRENGTH DURING INSTALLATION 0,050 kN copper cross-section of conductors
 MOBILE LAYING ✗	 OUTDOOR LAYING yes, with UV protection	 DIRECTLY BURIED LAYING ✓	 WITH RODENT PROTECTION ✗
 OCCASIONAL MOBILE LAYING W/O STRESS ✗	 LAYING IN FREE AIR ✓	 BURIED LAYING WITH PROTECTION ✓	 MINIMUM BENDING RADIUS 10 times the outer diameter

FG16OH2M16

Nominal cross section conductor	Conductor resistance at 20°C	Capacitance (Cc Cs)	Inductance (L)
[mm²]	[Ohm/Km]	[pF/m]	[µH/m]
1.50	13,3	110 200	0.9
2.50	7,98	120 220	0.9
4.00	4,95	130 235	0.9
6.00	3,30	145 260	0.9
10.00	1,91		
16.00	1,21		
25.00	0,780		
35.00	0,554		
50.00	0,386		
70.00	0,272		
95.00	0,206		
120.00	0,161		
150.00	0,129		
185.00	0,106		
240.00	0,0801		

Cc: approx. cond./cond. capacitance, measured at 800 kHz frequency between two cores, leaving the other terminals not involved in the test floating

Cs: approx. cond./shield capacitance, measured at 800 kHz frequency between core and shield, leaving the other terminals not involved in the test floating

L: approx. inductance, measured at 800 kHz frequency between two adjoining cores in short circuit, leaving the other terminals not involved in the test floating

FG16OH2M16

Article code	Formation	Twisted/stranded cores	Outer diameter approx	Weight approx	Cores colour	Cores identification standards	EPD
	[n° x mm²]		[mm]	[Kg/Km]			
GMZ15002	2 X 1,50	Cores twisted in concentric layers	8,4	128	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ15003	3 G 1,50	Cores twisted in concentric layers	9,0	147	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ15003U	3 X 1,50	Cores twisted in concentric layers	9,0	147	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ15004	4 G 1,50	Cores twisted in concentric layers	9,9	174	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ15004U	4 X 1,50	Cores twisted in concentric layers	9,9	175	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ15005	5 G 1,50	Cores stranded in concentric layers	10,6	203	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ15005U	5 X 1,50	Cores stranded in concentric layers	10,6	203	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ15007	7 G 1,50	Cores stranded in concentric layers	11,4	248	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15007U	7 X 1,50	Cores stranded in concentric layers	11,4	248	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15010	10 G 1,50	Cores stranded in concentric layers	14,2	347	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15010U	10 X 1,50	Cores stranded in concentric layers	14,2	347	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15012	12 G 1,50	Cores stranded in concentric layers	14,7	388	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15012U	12 X 1,50	Cores stranded in concentric layers	14,7	389	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15016	16 G 1,50	Cores stranded in concentric layers	16,4	488	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15016U	16 X 1,50	Cores stranded in concentric layers	16,4	489	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15019	19 G 1,50	Cores stranded in concentric layers	17,2	553	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓

Article code	Formation [n° x mm²]	Twisted/stranded cores	Outer diameter approx [mm]	Weight approx [Kg/Km]	Cores colour	Cores identification standards	EPD
GMZ15019U	19 X 1,50	Cores stranded in concentric layers	17,2	553	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15024	24 G 1,50	Cores stranded in concentric layers	20,9	753	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15024U	24 X 1,50	Cores stranded in concentric layers	20,9	753	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15030	30 G 1,50	Cores stranded in concentric layers	21,6	872	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ15036	36 G 1,50	Cores stranded in concentric layers	23,7	1002	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✗
GMZ15048	48 G 1,50	Cores stranded in concentric layers	26,6	1317	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25002	2 X 2,50	Cores twisted in concentric layers	9,8	169	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ25003	3 G 2,50	Cores twisted in concentric layers	10,1	195	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ25003U	3 X 2,50	Cores twisted in concentric layers	10,1	195	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ25004	4 G 2,50	Cores twisted in concentric layers	11,1	234	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ25004U	4 X 2,50	Cores twisted in concentric layers	11,1	234	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ25005	5 G 2,50	Cores stranded in concentric layers	12,3	282	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ25005U	5 X 2,50	Cores stranded in concentric layers	12,3	282	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ25007	7 G 2,50	Cores stranded in concentric layers	13,2	352	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25007U	7 X 2,50	Cores stranded in concentric layers	13,2	352	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25010	10 G 2,50	Cores stranded in concentric layers	17,0	488	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25010U	10 X 2,50	Cores stranded in concentric layers	17,0	488	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25012	12 G 2,50	Cores stranded in concentric layers	17,0	554	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25012U	12 X 2,50	Cores stranded in concentric layers	17,0	554	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25016	16 G 2,50	Cores stranded in concentric layers	19,3	736	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25016U	16 X 2,50	Cores stranded in concentric layers	19,3	736	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25019	19 G 2,50	Cores stranded in concentric layers	20,4	844	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25019U	19 X 2,50	Cores stranded in concentric layers	20,4	844	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25024	24 G 2,50	Cores stranded in concentric layers	24,2	1075	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25024U	24 X 2,50	Cores stranded in concentric layers	24,2	1075	Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✓
GMZ25030	30 G 2,50	Cores stranded in concentric layers	25,4	1216	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✗
GMZ25036	36 G 2,50	Cores stranded in concentric layers	27,5	1448	Green/Yellow-Black cores with progressive numbering	CEI UNEL 00725 - CEI EN 50334	✗
GMZ40002	2 X 4,00	Cores twisted in concentric layers	11,0	223	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ40003	3 G 4,00	Cores twisted in concentric layers	11,4	266	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ40003U	3 X 4,00	Cores twisted in concentric layers	11,4	264	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ40004	4 G 4,00	Cores twisted in concentric layers	12,9	332	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ40004U	4 X 4,00	Cores twisted in concentric layers	12,9	332	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ40005	5 G 4,00	Cores stranded in concentric layers	13,9	389	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓

Article code	Formation [n° x mm²]	Twisted/stranded cores	Outer diameter approx [mm]	Weight approx [Kg/Km]	Cores colour	Cores identification standards	EPD
GMZ40005U	5 X 4,00	Cores stranded in concentric layers	13,9	389	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ60002	2 X 6,00	Cores twisted in concentric layers	12,5	295	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ60003	3 G 6,00	Cores twisted in concentric layers	12,9	354	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ60003U	3 X 6,00	Cores twisted in concentric layers	12,9	354	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ60004	4 G 6,00	Cores twisted in concentric layers	14,3	430	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ60004U	4 X 6,00	Cores twisted in concentric layers	14,3	430	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ60005	5 G 6,00	Cores stranded in concentric layers	15,8	517	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ60005U	5 X 6,00	Cores stranded in concentric layers	15,8	517	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ100002	2 X 10,00	Cores twisted in concentric layers	14,6	411	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ100003	3 G 10,00	Cores twisted in concentric layers	15,3	522	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ100003U	3 X 10,00	Cores twisted in concentric layers	15,3	522	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ100004	4 G 10,00	Cores twisted in concentric layers	17,0	650	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ100004U	4 X 10,00	Cores twisted in concentric layers	17,0	650	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ100005	5 G 10,00	Cores stranded in concentric layers	19,0	809	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ100005U	5 X 10,00	Cores stranded in concentric layers	19,0	809	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ160002	2 X 16,00	Cores twisted in concentric layers	16,8	583	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ160003	3 G 16,00	Cores twisted in concentric layers	17,5	729	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ160003U	3 X 16,00	Cores twisted in concentric layers	17,5	729	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ160004	4 G 16,00	Cores twisted in concentric layers	19,9	959	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ160004U	4 X 16,00	Cores twisted in concentric layers	19,9	959	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ160005	5 G 16,00	Cores stranded in concentric layers	22,0	1158	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ160005U	5 X 16,00	Cores stranded in concentric layers	22,0	1158	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ250002	2 X 25,00	Cores twisted in concentric layers	20,9	928	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ250003	3 G 25,00	Cores twisted in concentric layers	21,8	1145	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ250003U	3 X 25,00	Cores twisted in concentric layers	21,8	1145	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ250004	4 G 25,00	Cores twisted in concentric layers	25,0	1489	Green/Yellow-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ250004U	4 X 25,00	Cores twisted in concentric layers	25,0	1478	Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ250005	5 G 25,00	Cores stranded in concentric layers	27,5	1784	Green/Yellow-Blue-Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ250005U	5 X 25,00	Cores stranded in concentric layers	27,5	1784	Blue-Brown-Black-Grey-Black	CEI UNEL 00722 - HD 308 S2	✓
GMZ350002	2 X 35,00	Cores twisted in concentric layers	23,8	1233	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ350003	3 G 35,00	Cores twisted in concentric layers	25,0	1548	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ350003U	3 X 35,00	Cores twisted in concentric layers	25,0	1548	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ350004	3,5 G 35,00	Cores twisted in concentric layers	28,0	1696	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓

Article code	Formation [n° x mm²]	Twisted/stranded cores	Outer diameter approx [mm]	Weight approx [Kg/Km]	Cores colour	Cores identification standards	EPD
GMZ350004U	3,5 X 35,00	Cores twisted in concentric layers	28,0	1696	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ500002	2 X 50,00	Cores twisted in concentric layers	27,6	1647	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ500003	3 G 50,00	Cores twisted in concentric layers	28,9	2112	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ500003U	3 X 50,00	Cores twisted in concentric layers	28,9	2112	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ500004	3,5 G 50,00	Cores twisted in concentric layers	32,7	2224	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ500004U	3,5 X 50,00	Cores twisted in concentric layers	32,7	2224	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ700002	2 X 70,00	Cores twisted in concentric layers	33,0	2382	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ700003	3 G 70,00	Cores twisted in concentric layers	34,5	3021	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ700003U	3 X 70,00	Cores twisted in concentric layers	34,5	3021	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ700004	3,5 G 70,00	Cores twisted in concentric layers	38,8	3119	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ700004U	3,5 X 70,00	Cores twisted in concentric layers	38,8	3119	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ950002	2 X 95,00	Cores twisted in concentric layers	37,1	3006	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ950003	3 G 95,00	Cores twisted in concentric layers	38,4	3816	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ950003U	3 X 95,00	Cores twisted in concentric layers	38,4	3816	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ950004	3,5 G 95,00	Cores twisted in concentric layers	43,2	3987	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ950004U	3,5 X 95,00	Cores twisted in concentric layers	43,2	3987	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ1200002	2 X 120,00	Cores twisted in concentric layers	42,2	3911	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ1200003	3 G 120,00	Cores twisted in concentric layers	43,4	4899	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ1200003U	3 X 120,00	Cores twisted in concentric layers	43,4	4899	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ1200004	3,5 G 120,00	Cores twisted in concentric layers	48,8	5169	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ1200004U	3,5 X 120,00	Cores twisted in concentric layers	48,8	5169	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ1500002	2 X 150,00	Cores twisted in concentric layers	44,9	4653	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ1500003	3 G 150,00	Cores twisted in concentric layers	46,0	5881	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ1500003U	3 X 150,00	Cores twisted in concentric layers	46,0	5881	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ1500004	3,5 G 150,00	Cores twisted in concentric layers	51,8	6281	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ1500004U	3,5 X 150,00	Cores twisted in concentric layers	51,8	6281	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ1850002	2 X 185,00	Cores twisted in concentric layers	49,2	5610	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ1850003	3 G 185,00	Cores twisted in concentric layers	50,1	7042	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓
GMZ1850003U	3 X 185,00	Cores twisted in concentric layers	50,1	7042	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ1850004	3,5 G 185,00	Cores twisted in concentric layers	56,3	7297	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ1850004U	3,5 X 185,00	Cores twisted in concentric layers	56,3	7297	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓
GMZ2400002	2 X 240,00	Cores twisted in concentric layers	54,6	7348	Blue-Brown	CEI UNEL 00722 - HD 308 S2	✗
GMZ2400003	3 G 240,00	Cores twisted in concentric layers	55,9	9151	Green/Yellow-Blue-Brown	CEI UNEL 00722 - HD 308 S2	✓

FG16OH2M16

Article code	Formation [n° x mm²]	Twisted/stranded cores	Outer diameter approx [mm]	Weight approx [Kg/Km]	Cores colour	Cores identification standards	EPD
GMZ2400003U	3 X 240,00	Cores twisted in concentric layers	55,9	9151	Brown-Black-Grey	CEI UNEL 00722 - HD 308 S2	✓
GMZ2400004	3,5 G 240,00	Cores twisted in concentric layers	63,2	9791	Brown-Black-Grey-Green/Yellow	CEI UNEL 00722 - HD 308 S2	✓
GMZ2400004U	3,5 X 240,00	Cores twisted in concentric layers	63,2	9791	Brown-Black-Grey-Blue	CEI UNEL 00722 - HD 308 S2	✓