

D	13/10/2025	BURČUL	BURČUL	KOLIĆ	2XSLCY-J changed from single PE conductor to three PE conductors	BPE
C	05/09/2025	BURČUL	BURČUL	KOLIĆ	VFD cable type changed from NYCWY to 2XSLCY-J	AVS
B	20/08/2025	BURČUL	BURČUL	KOLIĆ	Signal cables type changed, U1000R2V added for VFD PE conductor	AVS
A	29/07/2025	BURČUL	BURČUL	KOLIĆ	First Issue	PRE
Rév. Rev.	Date Date	Etabli Prepared	Vérifié Checked	Approuvé Approuvé	Modifications Modifications	Statut Status

Maîtrise d'ouvrage

Project Owner



ALBIOMA

NOTRE NATURE EST PLEINE D'ÉNERGIE

ALBIOMA BOIS ROUGE

2, Chemin Bois Rouge
97440 Saint-André
LA REUNION – France

Maîtrise d'œuvre

Engineering & Project Management



31 rue Ferrandière
69289 Lyon cedex 02
Téléphone : +33 4 72 32 56 00

Maîtrise d'ouvrage délégué

Project Owner Delegate



ALBIOMA

NOTRE NATURE EST PLEINE D'ÉNERGIE

Tour OPUS 12 - LA DÉFENSE 9
77, Esplanade du General de Gaulle
92914 LA DEFENSE CEDEX, France
Tél : +33(0)1.47.76.67.00

UNITE DE VALORISATION CSR ABR

ABR RDF POWER PLANT

Cables datasheets

Supplier / Fournisseur



ANDRITZ TEP d.o.o.

Ulica 108. Brigade ZNG, 84
35000 Slavonski Brod
Téléphone : 00385 35 213 552

Sub-Supplier / Sous-Traitant



Office Zagreb: Tuškanova 37, 10000 Zagreb, Croatia
Headquarters: Brza cesta 4, 21210 Solin Mravince, Croatia

Téléphone: 00385 1 2310 273

Réf. S/E : ATEPO

Réf. SS/ST : xxxxx

Projet Project					Tranche Unit			Entreprise émettrice Issuer						Numéro Number					Rév Rev
B	R	C	-		4	-	A	T	E	P	O	-	1	9	0	8	-	D	

Ce document est la propriété ALBIOMA. Il ne peut être utilisé, reproduit, transmis et/ou divulgué sans autorisation écrite préalable

1. Cable types

Connection type	Cable type
Motors power cables (distribution → VFD cabinets)	U1000R2V
Motors power cables (VFD cabinets → Motors)	2XSLCY-J
Motors power cables (direct on line, soft-starter)	U1000R2V
Signal cables (DI, DO)	U1000R2V
Signal cables – Inductive sensors (DI)	BIRTFLEX 5111-PVC-PUR-JB
Signal cables – Solenoid valve control (DO)	U1000R2V
Signal cables (AI, AO)	12IP09EISF, 08IP09EISF, 04IP09EISF, 01IP09EGSF (EISF and EGSF are the same for cables with one pair only)
Optical cable	Multimode fiber 12G 50/125 OM2

2. Cable types datasheets

a. EGSF

EGSF 300V INSTRUMENTATION CABLES Cu/PVC/OSCR/PVC



APPLICATION

These cables are used for transmission of analogue and digital signals in instrument and control systems at chemistry and petrochemistry industry plants, power plants, natural gas and petroleum plants, etc... Instrumentation cables are not allowed for direct connection to a low impedance sources, e.g. public mains electricity supply. They are for indoor installation, in dry and wet locations; on racks, trays, in conduits.

CABLE DESIGN

Conductor	: Stranded plain copper wires, EN 60228 Class 2
Insulation	: PVC compound, EN 50290-2-21/TI51
Core identification	: Black / White cores numbered 1-1, 2-2,... 1 pair: Black / White without number
Pair	: Two cores twisted to a pair
Stranding	: Pairs stranded in layers of optimum pitch
Separator	: Polyester tape
Screen	: Aluminium polyester tape with tinned copper drain wire (0,20 mm ² ~7x0,20 mm)
Outer sheath	: PVC compound, EN 50290-2-22/TM51; Oil and UV resistant, flame-retardant
Sheath colour	: ~RAL 7001, Grey or ~RAL 5015, Blue

TECHNICAL DATA @20°C

Standard	: Acc. to NF M 87-202 & EN 50288-7
Insulation Resistance	: Min. 20 Mohm x km
Voltage rating	: 300V
Test Voltage (AC 50 Hz)	: 2000 V
Min.bending radius	: 7,5 x D
Temperature Range	: Fixed: -30 °C ~ +70 °C Installation: -5 °C ~ +50 °C
Flame test	: IEC 60332-1 & TS EN 60332-1-2 EN IEC 60332-3-24 Cat C
Oil resistant	: IEC 60811 (4hours @70°C in IRM 902)
Sunlight resistance	: UL 1581 section 1200

CE: Conform to 2014/35/EU (Low Voltage Directive)

Conform to 2011/65/EU & 2015/863 (RoHS Directives)

Kesitler / Cross Sections

Cross section	Yaklaşık Dış Çap Approx. Outer Diameter (mm)	Bakır Ağırlığı Copper Weight (kg/km)	Yaklaşık Kablo Ağırlığı Approx. Cable Weight (kg/km)
1x2x0,50	6,00	12	50
8x2x0,75	14,00	118	287
12x2x0,75	17,10	177	417
1x2x0,88	6,60	19	63
8x2x0,88	14,60	138	319
12x2x0,88	17,80	223	475

*Diameter tolerance ±7%

YK 40155-21.07.2025 (YÇ) Rev1 22.07.2025 (YÇ)

b. EISF
EISF 300V INSTRUMENTATION CABLE
Cu/PVC/ ISCR/PVC/OSCR/PVC

APPLICATION

These individually cables are used for transmission of analogue and digital signals in instrument and control systems at chemistry and petrochemistry industry plants, power plants, natural gas and petroleum plants, etc.... Instrumentation cables are not allowed for direct connection to a low impedance sources, e.g. public mains electricity supply. They are for indoor installation, in dry and wet locations; on racks, trays, in conduits.

CABLE DESIGN

Conductor	:	Stranded plain copper wires, EN 60228 Class 2
Insulation	:	90°C grade, PVC compound
Core identification	:	White & Red coloured cores
P Pair	:	Two cores twisted to a pair
I Pair separator	:	Polyester tape
M Pair screen	:	Aluminium polyester tape with tinned copper drain wire (0,22 mm ² -7x0,20 mm)
Pair sheath	:	90°C grade, PVC compound, flame retardant, hydrocarbon resistant, Gray or Blue
Lay-up	:	Sheathed pairs laid-up together in optimum pitch
Separator	:	Polyester tape
Screen	:	Aluminium polyester tape with tinned copper drain wire (0,22 mm ² -7x0,20 mm)
Outer sheath	:	90°C grade, PVC compound, flame retardant, hydrocarbon resistant
Sheath colour	:	~RAL 7001, Grey or ~RAL 5015, Blue

TECHNICAL DATA @20°C

Standard	:	Acc. to NF M 87-202 & EN 50288-7
Insulation Resistance	:	Min. 20 Mohm x km
Voltage rating	:	300V
Test Voltage (AC 50 Hz)	:	2000 V
Min.bending radius	:	10 x D
Temperature Range	:	Fixed: -30 °C ~ +90 °C Installation: -5 °C ~ +50 °C
Flame test	:	IEC 60332-1 & TS EN 60332-1-2 EN IEC 60332-3-24 Cat C
Oil resistant	:	IEC 60811 (4hours @70°C in IRM 902)
Sunlight resistance	:	UL 1581 section 1200

CE : Conform to 2014/35/EU (Low Voltage Directive)

Conform to 2011/65/EU & 2015/863 (RoHS Directives)

Kesitler / Cross Sections

Cross section	Insulation Thickness	Approx. Outer Diameter	Copper Weight	Approx. Cable Weight
	(mm)	(mm)	(kg/km)	(kg/km)
4x2x0,75	0,50	16,90	69	315
8x2x0,75	0,50	22,50	138	580
12x2x0,75	0,50	26,60	206	826
4x2x0,88	0,50	17,60	79	333
8x2x0,88	0,50	23,60	158	615
12x2x0,88	0,50	28,80	237	884

*Diameter tolerance ±7%
 YK 40155-31.07.2025 (YÇ)

c. U1000R2V



U-1000-R2V

Câbles d'alimentation avec isolation XLPE et gaine PVC

APPLICATION

Ces câbles pour la distribution d'énergie sont adaptés à tous les types de connexion basse tension de type industriel, réseaux urbains, installations de bâtiments, etc. Particulièrement adapté en cas de température de fonctionnement élevée et lorsqu'une résistance élevée au rayonnement solaire et aux agents atmosphériques est requise. Bonne résistance aux basses températures et aux agents chimiques. Peut être utilisé sans protection mécanique supplémentaire à l'air libre, fixé aux murs ou dans les chemins de roulement, à l'intérieur des passerelles et dans les vides dans les constructions de câbles en général. Peut être posé sous terre avec une protection mécanique constituée de dalles, de carreaux ou de briques. Il n'est pas recommandé de poser ce câble dans un sol inondé pendant plus de deux mois par an. Avec une protection mécanique appropriée, il peut être utilisé dans des zones sujettes à risque d'explosion, mais dans ce cas la charge de courant autorisée admissible est réduite de 15%. Il peut être utilisé à une température ambiante allant jusqu'à -25°.

CARACTÉRISTIQUES TECHNIQUES

Catégorie de RCP : Eca
Tension d'essai : 4 Kv
Tension nominale : 0,6/1 kV
Rayon de courbure min. : multiconducteur 8D
Temp. de pose min. : -10°C
Temp. max. du conducteur : 90°C
Temp. max. de court-circuit : 250°C

NORMES

NF C32-321; IEC 60502-1

CONSTRUCTION

Conducteurs : En cuivre
Isolation : XLPE
Revêtement d'assemblage : PVC
Gaine : PVC

IDENTIFICATION DES CONDUCTEURS

Selon la norme HD 308 S2

Couleur de l'isolant :

Monoconducteur : ● Vert/Jaune OU ● Noir
2-conducteur : ● Marron ● Bleu
3-conducteur (a) : ● Vert/Jaune ● Marron ● Bleu
3-conducteur (b) : ● Noir ● Marron ● Gris
4-conducteur (a) : ● Vert/Jaune ● Marron ● Noir ● Gris
4-conducteur (b) : ● Bleu ● Marron ● Noir ● Gris
5-conducteur : ● Vert/Jaune ● Bleu ● Marron ● Noir ● Gris

Couleur de la gaine extérieure :

● Noir

Autres couleurs disponibles sur demande

HOMOLOGATION




185 rue Louine Labbé, 69970 CHAPONNAY 04-28-38-42-29 admin@rematec.fr

d. 2XSLCY-J

BIRTSERVO 2XSLCYK-JB EMV-UV - 0,6/1 kV XLPE YALITIMLI, EKRANLI 0,6/1 kV MOTOR BAĞLANTI KABLOLARI XLPE INSULATED, SCREENED 0,6/1 kV CONTROL & POWER CABLES	
KULLANIM ALANI Bu çift kat ekranlanmış beyan gerilimi 0,6/1 kV olan düşük kapasiteli, frekans çeviricileri için motor ve güç bağlantı kabloları endüstriyel alanlarda, servo kontrol cihaz ve makinelerde, otomobili endüstrisinde, endüstriyel valf ve pompalarda, vantilatör, havalandırma sistemlerinde ve benzeri uygulamalarda orta mekanik streslerin olduğu ara sıra serbest hareket gereken yerlerde ve sabit döşemede, hafif yağlı, kuru, nemli, ıslak ortamlarda kullanılır. Ayrıca çift kat ekran dış elektriksel gürültüye karşı koruma ve elektromanyetik uyumluluk (EN 61800-3) sağlar. Bu kablolar hava koşullarına, ozona ve UV'ye dayanıklı olup; dışarıda, dahili uygulamalarda ve direkt toprak altına gömülerek kullanılır.	APPLICATION These double screened rated voltage 0,6/1 kV, low capacitance, motor and power connecting cables for frequency converters used in industrial areas, servo control devices and machines, ventilator, automobile industry, industrial valves and pumps, air-conditioning systems and similar applications in slightly oily, dry, moist, wet environments at fixed laying and where occasionally free movement is required with medium mechanical stresses. And also double layer screen provides protection against external electrical interferences and electromagnetic compatibility (EN 61800-3). These cables are resistant to weather conditions, ozone and UV; and used for indoor, outdoor applications, and for underground installation.
KABLO YAPISI İletken : Bükülmüş çıplak bakır teller, EN 60228 Sınıf 5 İzolasyon : XLPE bileşik, IEC 60502-1 Damar : JB: HD 308 S2'e göre renkli damarlar / sarı-yeşil damar (G) Damar tanımlama : * 4 damar : Sarı/yeşil, Kahve, Siyah, Gri : ** 3+3 damar : Kahve, Siyah, Gri ve 3 adet Sarı/yeşil : OB: HD 308 S2'e göre renkli damarlar / sarı-yeşil damarsız (*opsiyonel) : *** 4 damar : Mavi, Kahve, Siyah, Gri Büküm : 4 damar : 4 adet damar uygun adımda fitillerle bükülür : ARTI-3 : 3 adet damar, 3 adet sarı-yeşille (3+3) birlikte uygun adımda bükülür Ayrıcı : Polyester bant Ekran : Alüminyum polyester bant & Kalaylı bakır tel örgü Dış kılıf : PVC bileşik, IEC 60502-1 / ST1; UV dayanımlı Dış kılıf rengi : ~RAL 9005, Siyah	CABLE DESIGN Conductor : Flexible plain copper wires, EN 60228 Class 5 Insulation : XLPE compound, IEC 60502-1 Core : JB: Coloured cores acc. to HD 308 S2 / with green-yellow core (G) Identification : * 4 cores : Green/yellow, Brown, Black, Grey : ** 3+3 cores : Brown, Black, Grey & 3 Green/yellow : OB: Coloured cores acc. to HD 308 S2 / without green-yellow core (*option) : *** 4 cores : Blue, Brown, Black, Grey Stranding : 4 cores : 4 cores stranded in optimum pitch with fillers : 3-PLUS : 3 cores stranded together in optimum pitch with 3 yellow-cores (3+3) Separator : Polyester tape Screen : Aluminium polyester tape & Tinned copper wires braiding Outer sheath : PVC compound; IEC 60502-1 / ST1; UV resistant Sheath colour : ~RAL 9005, Black
TEKNİK ÖZELLİKLER @20°C Standart : VDE 0250 & 4 IEC 60502-1 & EN 50525-1 (Göre dizayn) İletken direnci : EN 60228 Sınıf 5'e göre İletken sıcaklığı : Max. +90 °C çalışmada : (Kısa devre sıcaklığı +250 °C; 5 sn) İzolasyon direnci : Min. 200 MΩ.km Ortak kapasite : Damar/damar : 60 ~ 250 nF/km : Damar/ekran : 110 ~ 450 nF/km (Kablo kesimine göre) Transfer empedansı : Max. 250 mΩ/m @ 30 MHz Beyan gerilimi (U ₀ /U) : 0,6/1 kV Çalışma gerilimi, max. AC ve 3-faz : 700 / 1200 V DC çalışma : 900 / 1800 V Test gerilimi (AC 50 Hz) : 4000 V Çalışma sıcaklığı : Sabit : - 40 °C ~ + 80 °C : Esnek : - 5 °C ~ + 70 °C Min. bükülme yarıçapı : Sabit : ≤ 12 mm; 6 x D : >12 mm; 7,5 x D : >20 mm; 10 x D : Esnek : ≤ 12 mm; 12 x D : >12 mm; 15 x D : >20 mm; 20 x D Alev geciktirici test : EN 60332-1-2 & IEC 60332-1-2 Yağ testi : EN 60811-404, & IEC 60811-404'e göre : EN 50290-2-2/TM54; 4 saat @ 70°C EMC : Elektromanyetik Uyumluluk CE : 2014/53/EU (Düşük Voltaj Direktifi'ne uyur) 2011/65/EU & 2015/863 (RoHS Direktifleri'ne uyur)	TECHNICAL DATA @20°C Standard : VDE 0250 & IEC 60502-1 & EN 50525-1 (Designed acc. to) Conductor resistance : Acc. to EN 60228 Class 5 Conductor temperature : Max. +90 °C in operation : (Short circuit temperature +250 °C; 5 sec.) Insulation resistance : Min. 200 MΩ.km Mutual capacitance : Core/core : 60 ~ 250 nF/km : Core/screen : 110 ~ 450 nF/km (Acc. to cross-section) Transfer Impedance : Max. 250 mΩ/m @ 30 MHz Rated voltage (U ₀ /U) : 0,6/1 kV Operating voltage, max. AC ve 3-phase : 700 / 1200 V DC operation : 900 / 1800 V Test voltage (AC 50 Hz) : 4000 V Temperature range : Fixed : - 40 °C ~ + 80 °C : Flexible : - 5 °C ~ + 70 °C Min. bending radius : Fixed : ≤ 12 mm; 6 x D : >12 mm; 7,5 x D : >20 mm; 10 x D : Flexible : ≤ 12 mm; 12 x D : >12 mm; 15 x D : >20 mm; 20 x D Flame retardance test : EN 60332-1-2 & IEC 60332-1-2 Oil resistant test : Acc. to EN 60811-404, & IEC 60811-404 : EN 50290-2-2/TM54; 4 hours @70°C EMC : Electromagnetic Compatibility CE : Conform to 2014/53/EU (Low Voltage Directive) Conform to 2011/65/EU & 2015/863 (RoHS Directives)

BIRTSERVO 2XSLCYK-JB EMV-UV - 0,6/1 kV
XLPE YALITIMLI, EKRANLI 0,6/1 kV MOTOR BAĞLANTI KABLOLARI
XLPE INSULATED, SCREENED 0,6/1 kV CONTROL & POWER CABLES




Kesitler / Cross Sections

ARTI-3 (3+3) damar versiyonu / 3-PLUS (3+3) core version						
Örün kodu	Damar sayısı x Kesit	Yaklaşık Dış Çap	Bakır Ağırlığı	Yaklaşık Kablo Ağırlığı	Akım Taşıma Kapasitesi-Havada @30°C	Akım Taşıma Kapasitesi-Yüzeyde @30°C
Part-number	No. of cores x Cross section	Approx. Outer Diameter	Copper Weight	Approx. Cable Weight	Current Carrying Capacity-In open Air @30°C	Current Carrying Capacity-On surface @30°C
	(mm²)	(mm)	(kg/km)	(kg/km)	A (Amper)	A (Amper)
1039 08 004	3G1,5+3x0,25	9,10	68	136	23	22
1039 09 004	3G2,5+3x0,50	10,40	103	194	32	30
1039 10 004	3G4+3x0,75	11,70	152	260	42	40
1039 11 004	3G6+3x1	12,90	215	344	54	52
1039 12 004	3G10+3x1,5	15,30	348	511	75	71
1039 13 004	3G16+3x2,5	18,90	539	771	100	96
1039 14 004	3G25+3x4	22,60	825	1144	127	119
1039 15 004	3G35+3x6	25,60	1143	1521	158	147
1039 16 004	3G50+3x10	29,60	1676	2161	192	179
1039 17 004	3G70+3x10	33,90	2251	2837	246	229
1039 18 004	3G95+3x16	38,40	3130	3840	298	278
1039 19 004	3G120+3x16	42,90	3822	4674	346	322
1039 20 004	3G150+3x25	48,90	4936	6041	399	371
1039 21 004	3G185+3x35	54,50	6160	7496	456	424
1039 22 004	3G240+3x50	61,10	8140	9778	538	500

*Dış çap toleransı / Diameter tolerance: ± %7

**Diğer kesitler için lütfen sorunuz / Please ask for other cross-sections

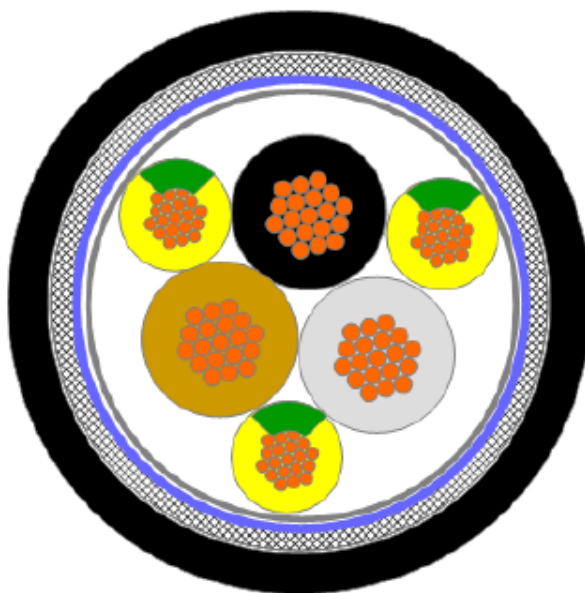

e. BIRTFLEX 5111-PVC-PUR-JB 4G0,75 mm²

BIRTFLEX 5111-PUR / YSL11Y 0,6/1 kV
PVC YALITIMLI, PUR KILIFLI KUMANDA & GÜÇ KABLOLARI
PVC INSULATED, PUR SHEATHED CONTROL & POWER CABLES



APPLICATION

These rated voltage 0,6/1 kV, flexible PUR sheathed control and power connecting cables are used in industrial areas, control devices and tooling machineries, conveyor and production lines, heating and air-conditioning systems, in tough conditions, oily, dry, moist, wet environments at fixed laying and where occasionally free movement is required with low tensile load. These cables are resistant to tear-strength, abrasions and notch, all weather conditions, oils, many chemical substances, solvents and acids, hydrolysis, microbes, ozone and UV. These cables are used for indoor and outdoor applications.

CABLE DESIGN

Conductor	: Flexible plain copper wires, EN 60228 Class 5
Insulation	: PVC compound, superior than EN 50363-3 / T12
Core identification	: - JB: Coloured cores / with a green-yellow core (G) : - JB: ≤ 5 cores : acc. to HD 308 S2
Stranding	: Cores stranded in layers of optimum pitch
Separator	: Synthetic white tape (without tape acc. to request)
Outer sheath (*)	: PUR compound; EN 50363-10-2, Glossy or Matt
Sheath colour	: ~RAL 7001, Grey

(*) NFR: Non-Flame Retardancy (*Option)

PUR~TPU: Thermoplastik Polyurethane (Ether based)

TECHNICAL DATA @20°C

Standard	: EN 50525-1 & EN 50525-2-51 & : EN 50525-2-21 (Designed acc. to)
Conductor resistance	: Acc. to EN 60228 Class 5
Insulation resistance	: Min. 20 MΩ.km
Rated voltage (U ₀ /U)	: 0,6/1 kV
Test voltage (AC 50 Hz)	: 4000 V
Temperature range	: Fixed : - 40 °C ~ + 80 °C : Flexible : - 5 °C ~ + 70 °C
Min. bending radius	: Fixed : 4 x D : Flexible : 10 x D
Flame retardance test	: EN 60332-1-2 & IEC 60332-1-2 : NFR: Non-flame retardancy (*option)
Oil resistant test	: Acc. to EN 60811-404, & IEC 60811-404 : EN 50363-10-2; 7x24 hours @100°C

CE : Conform to 2014/35/EU (Low Voltage Directive)

Conform to 2011/65/EU & 2015/863 (RoHS Directive)

Kesitler / Cross Sections

Kesitler / Cross Sections


Damar sayısı x Kesit	Yaklaşık Dış Çap	Bakır Ağırlığı	Yaklaşık Kablo Ağırlığı
No. of cores x Cross section	Approx. Outer Diameter	Copper Weight	Approx. Cable Weight
(mm ²)	(mm)	(kg/km)	(kg/km)
4G0,75	7,90	26	94

*Diameter tolerance ±7%
YK 40155-22.07.2025 (YÇ)

f. Fiber optic

A-DQ(ZN)2Y Light Dielectric Outdoor Cable with or without
A-DQ(ZN)B2Y Non-Metallic Rodent Protection

Application: This metal-free optical fibre outdoor cable is suitable for installations directly into the earth or in conduits in telecommunications and data processing systems. The stranded design (n x m) is available till 60 fibres, and with a multifunctional used reinforced glass roving braiding as a non-metallic stress relieving element and an armour for rodent protection.

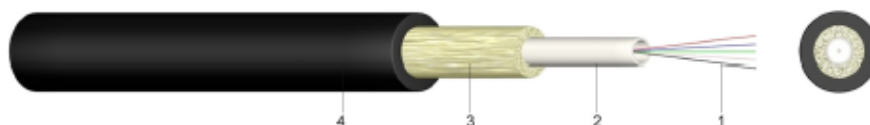

Construction:

- 1 fibre glass with 50 or 62,5 µm
- 2 filled with waterproof gel
- 3 protection form rodent with glass roving
- 4 outer sheath of polyethylene (PE), black

Standards: adapted to DIN VDE 0888

Technical data:

Temperature range	transport / storage	-30°C till +70°C
	operational	-20°C till +70°C
Bending radius	under tension	20 x diameter
	no tension	15 x diameter

Description	Overall diameter appr. mm	Weight appr. kg/km	Crush strenght permanent N/dm	Tractive force installation / operation N
A-DQ(ZN)2Y				
4 G 50/125	11,0	90	3.000	3.000 / 2.000
8 G 50/125	11,0	90	3.000	3.000 / 2.000
12 G 50/125	11,0	90	3.000	3.000 / 2.000
16 G 50/125	11,0	90	3.000	3.000 / 2.000
24 G 50/125	11,0	90	3.000	3.000 / 2.000
4 G 62,5/125	11,0	90	3.000	3.000 / 2.000
8 G 62,5/125	11,0	90	3.000	3.000 / 2.000
12 G 62,5/125	11,0	90	3.000	3.000 / 2.000
24 G 62,5/125	11,0	90	3.000	3.000 / 2.000
A-DQ(ZN)B2Y				
4 G 50/125	11,5	105	4.000	5.000 / 3.000
8 G 50/125	11,5	105	4.000	5.000 / 3.000
12 G 50/125	11,5	105	4.000	5.000 / 3.000
16 G 50/125	11,5	105	4.000	5.000 / 3.000
24 G 50/125	11,5	105	4.000	5.000 / 3.000
4 G 62,5/125	11,5	105	4.000	5.000 / 3.000
8 G 62,5/125	11,5	105	4.000	5.000 / 3.000
12 G 62,5/125	11,5	105	4.000	5.000 / 3.000
24 G 62,5/125	11,5	105	4.000	5.000 / 3.000

Further types in singlemode or multimode style upon request