

C	10/12/2025	BURCUL	BURCUL	KOLIC	Datasheet approved by Lionel Plouchart by email 3/7/2025	BPE
B	13/03/2025	BURCUL	BURCUL	KOLIC	Clarifications added	AVS
A	16/02/2025	BURCUL	BURCUL	KOLIC	First issue	PRE
Rév. Rev.	Date Date	Etabli Prepared	Vérifié Checked	Approuvé Approuvé	Modifications Modifications	Statut Status

Maîtrise d'ouvrage

Project Owner



ALBIOMA

NOTRE NATURE EST PLEINE D'ÉNERGIE

ALBIOMA BOIS ROUGE

2, Chemin Bois Rouge
97440 Saint-André
LA REUNION – France

Maîtrise d'œuvre

Engineering & Project Management



31 rue Ferrandière
69289 Lyon cedex 02
Téléphone : +33 4 72 32 56 00

Maîtrise d'ouvrage délégué

Project Owner Delegate



ALBIOMA

NOTRE NATURE EST PLEINE D'ÉNERGIE

Tour OPUS 12 - LA DÉFENSE 9
77, Esplanade du General de Gaulle
92914 LA DEFENSE CEDEX, France
Tél : +33(0)1.47.76.67.00

UNITE DE VALORISATION CSR ABR

ABR RDF POWER PLANT

EMERGENCY DIESEL GENERATOR SPECIFICATIONS

Supplier / Fournisseur



ANDRITZ TEP d.o.o.

Ulica 108. Brigade ZNG, 84
35000 Slavonski Brod
Téléphone : 00385 35 213 552

Sub-Supplier / Sous-Traitant



Office Zagreb: Tuškanova 37, 10000 Zagreb, Croatia
Headquarters: Brza cesta 4, 21210 Solin Mravince, Croatia

Téléphone: 00385 1 2310 273

Réf. S/E : ATEPO

Réf. SS/ST : xxxxx

Projet Project						Tranche Unit		Entreprise émettrice Issuer					Numéro Number				Rév Rev	
B	R	C	-	4	-	A	T	E	P	O	-	1	9	0	6	-	C	

Ce document est la propriété ALBIOMA. Il ne peut être utilisé, reproduit, transmis et/ou divulgué sans autorisation écrite préalable

TJ1250CMK5L (400 VAC)

50 Hz Diesel Generator






Output Power

Standby Power (ESP)	kVA	1254
	kW	1003
Prime Power (PRP)	kVA	1112
	kW	889

Size

	W x L x H (mm)	Weight (kg)	Fuel Tank (lt)	Noise dB(A) @ 7m
Canopied	2200x5830x3430	11714	1650	89

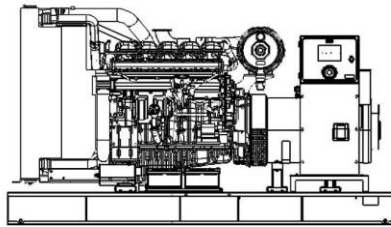

Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100% of Prime Power. The generator must not be overloaded.

Standby Power

The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

TTDTJ1250CMK5L20250124EN

TJ1250CMK5L (400 VAC)

50 Hz Diesel Generator



Engine

Manufacturer		CUMMINS
Model		KTA38 G9
Cylinder Configuration		V-TYPE
No of Cylinders		12
Displacement	lt	37,8
Bore	mm	159
Stroke	mm	159
Compression Ratio		TBA
Aspiration		TURBOCHARGED - AFTERCOOLED
Governor Type		ELECTRONIC
Cooling System		WATER
Coolant Capacity	lt	229
Lubrication Oil Capacity	lt	135
Electrical System	VDC	24
Speed / Frequency 50 Hz	rpm	1500 rpm / 50 Hz
Engine Gross Power (Standby 50 Hz)	kW	1089 (STANDBY), N/A (PRIME)
Fuel Consumption %110 ESP 50 Hz	lt/h	TBA
Fuel Consumption %100 PRP 50 Hz	lt/h	256
Fuel Consumption %75 PRP 50 Hz	lt/h	196
Fuel Consumption %50 PRP 50 Hz	lt/h	137
Exhaust Outlet Temperature 50 Hz	°C	-
Exhaust Gas Flow 50 Hz	m3/min	TBA
Combustion Air Flow 50 Hz	m3/min	TBA
Cooling Air Flow 50 Hz	m3/min	-

Alternator

Manufacturer		LEROY-SOMER
Model		LSA 50.2 L8
No of Phases		3
Power Factor		0,8
No of Bearings		SINGLE
No of Poles		4
No of Leads		6
Voltage Regulation (Steady State)		± %0,25 [Steady State]
Insulation Class		F
Degree of Protection		IP 23
Excitation System		AVR (Automatic Voltage Regulator), Brushless
Connection Type		STAR
Total Harmonic Content (No Load)		< %3,5
Frequency	Hz	50
Voltage Output 50 Hz	VAC	230 / 400
Rated Power (Standby) 400 50 Hz	kVA	1575
Rated Power (Continuous) 400 50 Hz	kVA	1500
Efficiency (4/4 400 V 50 Hz)	%	95,4

TTDTJ1250CMK5L20250124EN

Standard Delivery

Engine

In Teksan generator sets, leading engine brands that have state of the art technology and have compliance with ISO 8528, ISO 3046, BS 5514, DIN 6271 standarts, are being used. These engines with low fuel consumption, provide accurate speed setting and order, mount to the fuel pump, also have mechanic or electronic type governors.

Alternator

In products Teksan produced, leading alternator brands of the world that have state of the art technology, high quality, productivity and durability, are being used. All alternators, which pass necessary test process and found appropriate according to EC 60034-1; CEI EN 60034-1; BS 4999-5000; VDE 0530, NF 51-100,111; OVE M-10, NEMA MG 1.22. standarts, have bearing system that does not need maintenance, with electronic type voltage regulator providing voltage setting.

Control Panel

Standard control panel, that is used in Teksan generator sets, ensures comfortable and safe usage. All measured and statistical parameters, operating modes, notice and alarms and condition of generator, are monitored easily from the control panel. On the front of the panel's metal body has electronic control module and the emergency stop button and the panel's metal body is made of steel sheet and is painted with electrostatic powder paint.

Teksan offers panel design and solutions that comply with special requirements of customers as well as quality standard panels.

Chassis and Fuel Tank

Chassis is manufactured from steel that has features and durability for carrying burden of generator set. Thanks to its rigid structural design and anti-vibration mounts, it reduces vibration level to minimum. All chassis contain lifting lugs. Apart from chassis that are produce by Teksan, special solutions that design in accordance with customer desires, make transportation and positioning easier.

In less than 1600 kVA power generator sets, fuel tank is produced integratedly to the chassis. In more than 1600 kVA power generator sets, rectangular type fuel tank is provided with generator set seperately. In all types of fuel tank have its level and indicator.

Cooling System

System, that consists of quality industrial -type radiator, expansion tank and cooler fan, keeps the temprature of generator set's equipments constant at a proper level.

Installed options

- Equipped for automatic StandBy operation upon external starting order activation contact
- Equipped with oil & 50% antifreeze
- Canopy K581H210
- Double wall fuel tank with leakage sensor
- The generator output breaker ABB 4P 1800A CB
- Double bearing alternator
- Standard alternator LSA50.2 M6 replaced with LSA50.2 L8 F Class temperature rise
- Anti-condensation heater
- System 2 Protection – Reinforced winding protection for harsh environments
- DPR - 175 Temperature monitoring unit for PT probes
- PT100 Stator Winding probe per Phase,
- PT100 Both Bearings probe
- DSE7320 Control Module AMF,
- DSE2157 Expansion Modules,
- Double batteries + double charger + battery cut-off switch,
- Exhaust Silencer -40dB - delivered loose (to be mounted on-site)
- C5M-M paint for Chassis
- C5M-M paint for Canopy

TJ1250CMK5L (400 VAC)

50 Hz Diesel Generator



Control Panel Features-DSE-7320

- 4-Line back-lit LCD text display
- Five key menu navigation
- Front panel editing with PIN protection
- Customisable status screens
- Power save mode
- Support for up to three remote display units
- 9 configurable inputs
- 8 configurable outputs
- Flexible sender inputs
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Multiple date and time scheduler
- Configurable event log (250)
- Tier 4 CAN engine support
- Integral PLC editor
- Easy access diagnostic page
- CAN and Magnetic Pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- Engine exerciser
- "Protections disabled" feature
- kW & kV Ar protection
- Reverse power (kW & kV Ar) LED and LCD alarm indication
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7320)
- Unbalanced load protection
- Independent Earth Fault trip
- True dual mutual standby with load balancing timer (DSE7310 only)
- USB connectivity
- Backed up real time clock
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software
- User selectable RS232 and RS485 communications
- Configurable Gencomm pages
- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- Idle control for starting & stopping.
- DSENet® expansion compatible
- Heated display option available



Functions

- AMF unit
- Remote start controller
- Manuel start controller
- Engine controller
- Remote display & control unit
- CTs at genset or load side

Communications

- Web monitoring
- GSM-SMS (required externally modem)
- e-mail
- USB Device
- RS-232
- J1939-CANBUS
- Modbus RTU through RS-485
- Modbus TCP/IP


Connection

- 2 phase 3 wires, L1-L2
- 2 phase 3 wires, L1-L3
- 3 phase 3 wires
- 3 phase 4 wires, star
- 3 phase 4 wires, delta
- 1 phase 2 wires

- Technical information and values are according to ISO8528, ISO3046, NEMA MG-1.22, IEC 600341, BS 4999-5000, VDE 0530 standards.
- Producing with ISO9001, ISO14001, OHSAS18001, TSE, CE standards.
- All information given in this leaflet is intended for general purposes only.
- Due to a policy continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sales.

TBA: To Be Asked TBD: To Be Determined NA: Not Available N/A: Not Applicable TTDTJ1250CMK5L20250124EN

Group	Chasis	Canopy
10	S5810K2100H20	K581H210

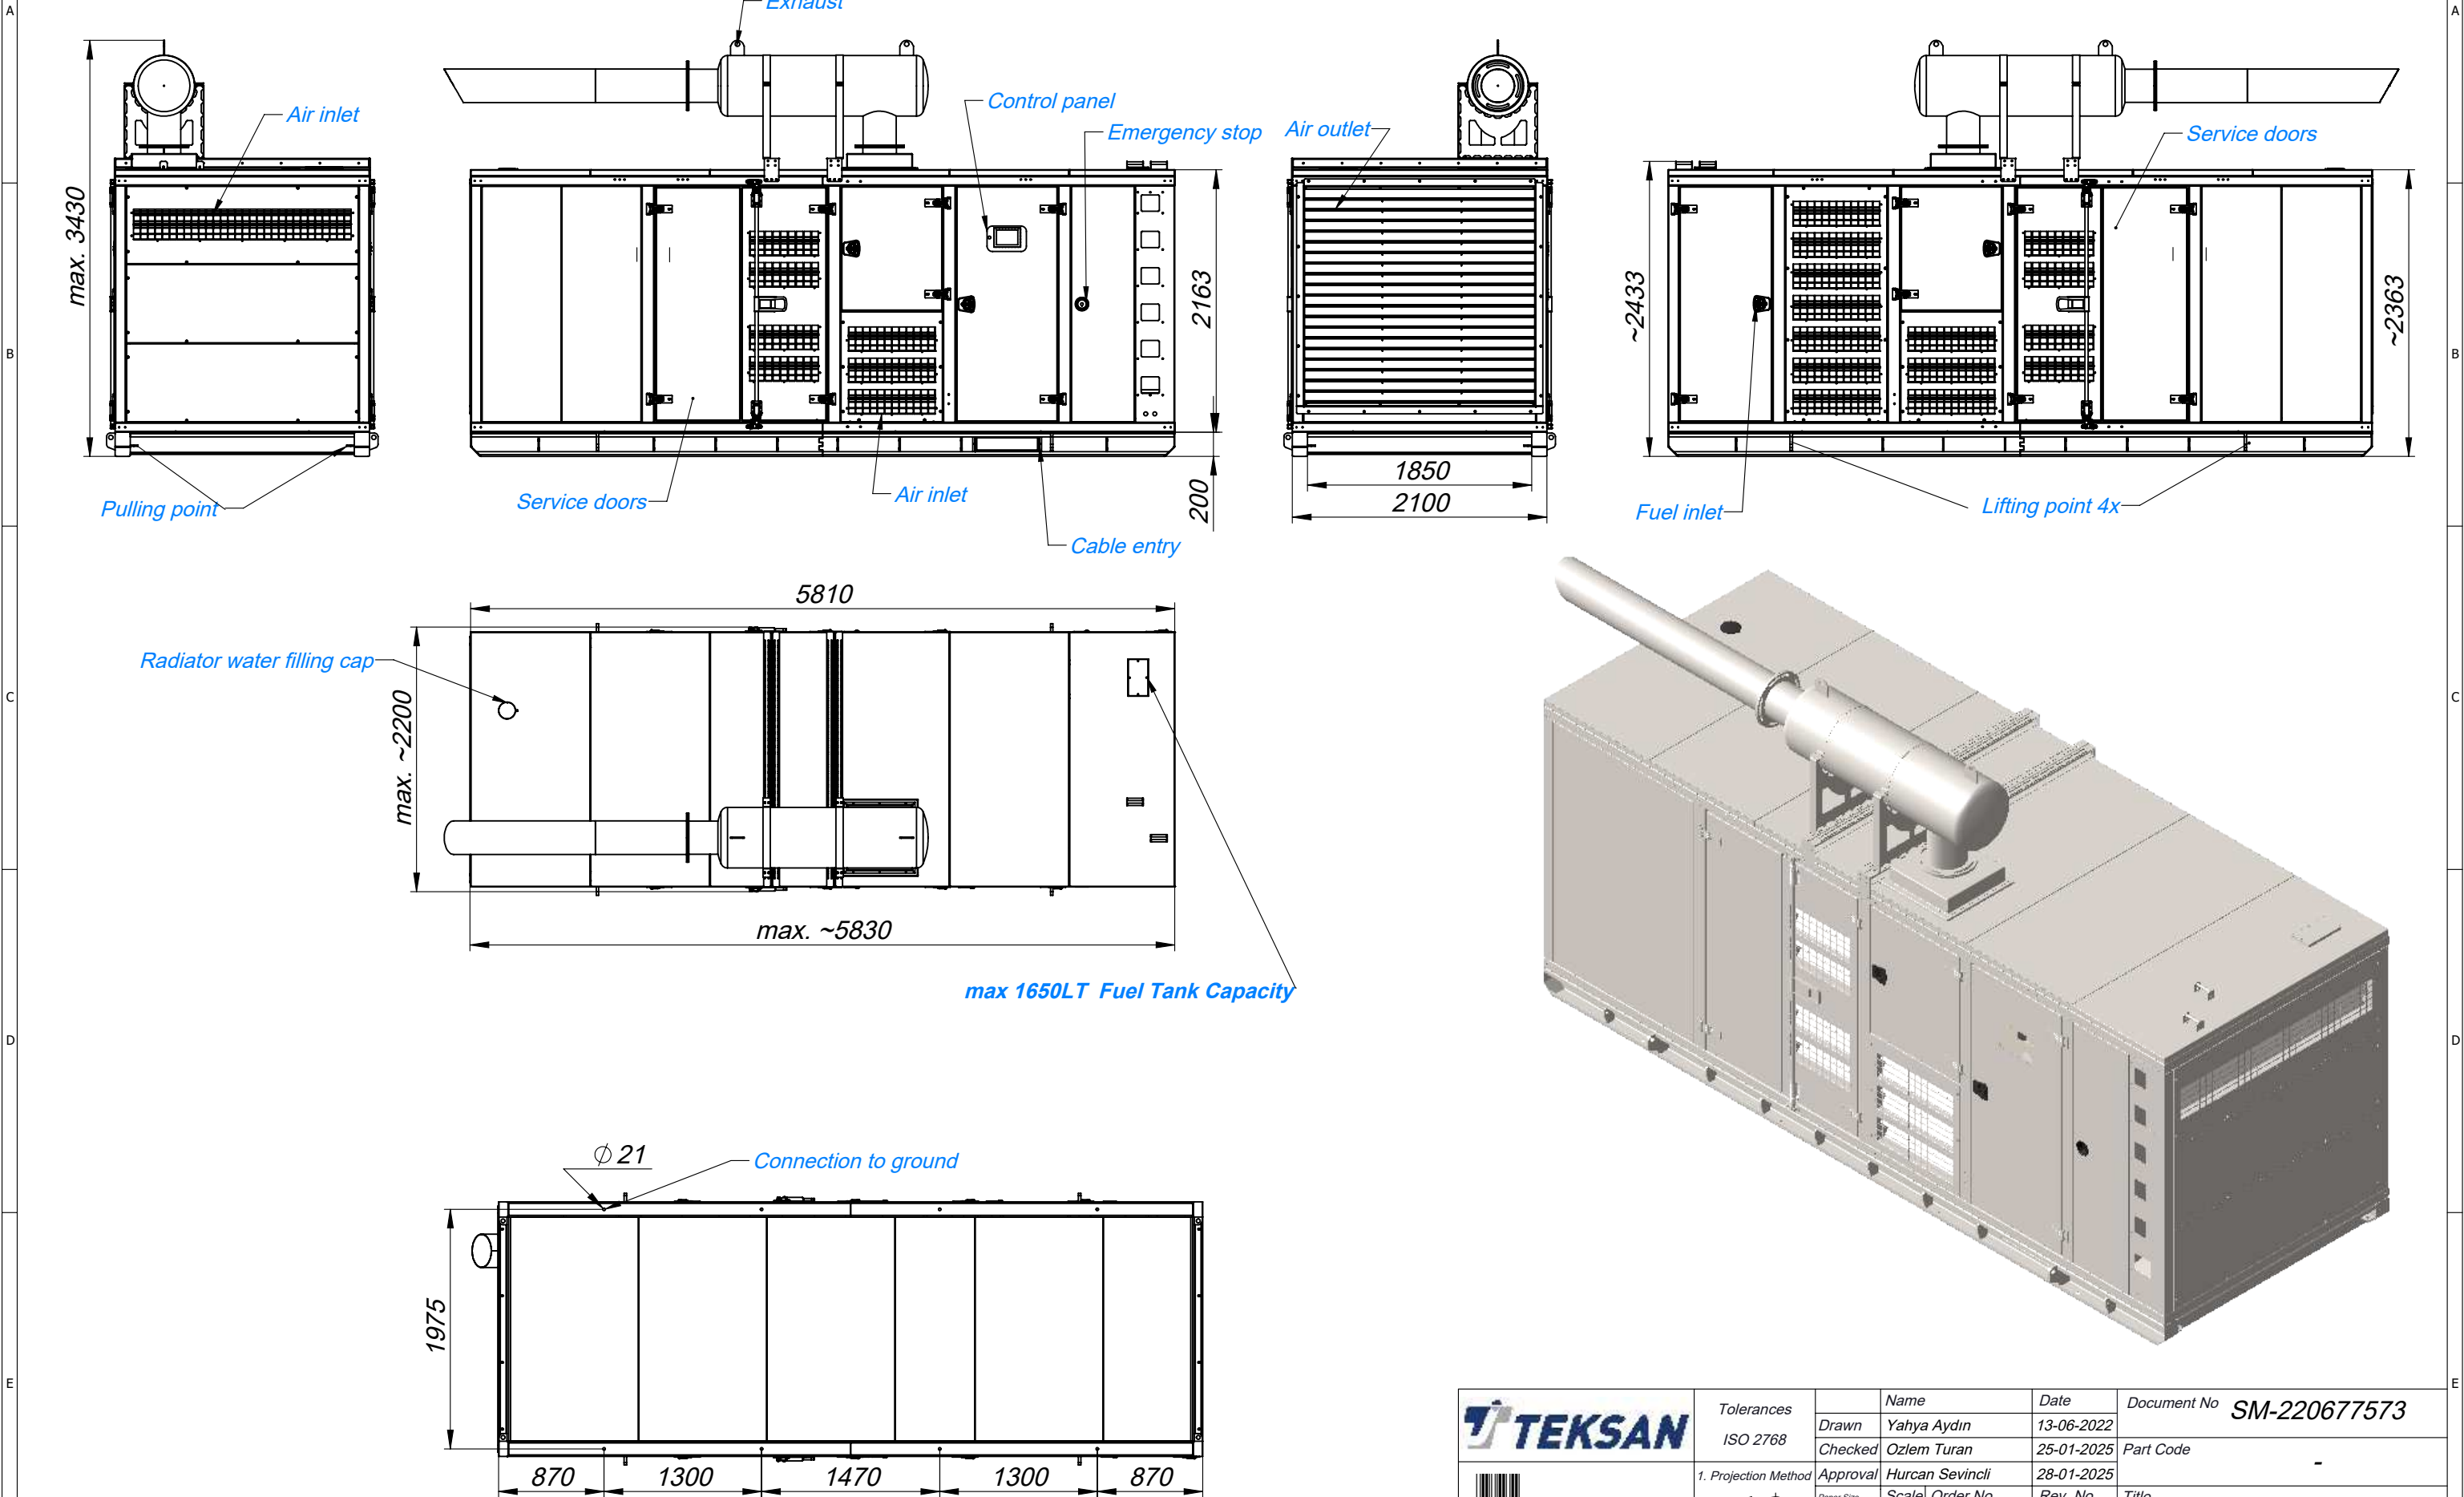

Please do not take measures on the drawings.

	Tolerances	Name	Date	Document No
	ISO 2768	Yahya Aydın	13-06-2022	SM-220677573
	1. Projection Method	Ozlem Turan	25-01-2025	Part Code
		Hurcan Sevincli	28-01-2025	-
	Paper Size	Scale	Order No	Rev. No
	A3	1:50	-	R02
		Title		
		TJ1250PE5L		