

THE UNIVERSITY OF TEXAS AT TYLER
COLLEGE OF ENGINEERING

EENG 4315 - SENIOR DESIGN II

Intelligent Lighting Control System

A CIRCADIAN BASED LIGHTING SYSTEM FOR SPACE FLIGHT

GRIGGS HUTAFF, *Co-Leader*
CHARLES ROBERSON, *Co-Leader*
CHAD DAWILI, *Financial Officer*
EZEQUIEL FUENTES, *Archivist*
OSCAR SURAM, *Acquisition Manager*

February 22, 2019

Contents

1	Project Description	1
2	Final Design Specifications	2
3	Design Solution	2
	3.1 Lighting Modules	2
	3.2 Control System	3
	3.3 Display Model	3
9	References	3

List of Figures

1	High Level System Overview	1
---	--------------------------------------	---

List of Tables

1 Project Description

The goal of this project is to provide a lighting system which can meet the demands and aid the progression of long-term space flight. Although engineers have been able to overcome the immediate dangers of short range space flight we must further develop novel solutions to the issues of long-term confinement in artificial environments. Along with water and food, sleep is among the basic necessities for long term human survival. However, we know that astronauts suffer from sleep deprivation during flights. About half of everyone who flies to space relies on sleep medication and astronauts generally get about 6 hours of sleep in orbit despite being allowed 8.5.[2]

For this reason, NASA developed the "Lighting System to Improve Circadian Rhythm Control" to be used on the International Space Station (ISS). [3] This modular lighting assembly uses a micro controller with power relay to adjust color temperature and perceived intensity. Future spacecrafts will require new and innovative light control methods to improve reliability such as compensating for degrading lighting sources and maintaining the crew's circadian rhythms [1].

Our Intelligent Lighting Control System, centrally controlled with sensor feedback and visual status display, is a complete solution for future astronauts and their needs. Our system features an automatic light compensation algorithm, single communication bus capable of addressing each light fixture, and touchscreen user interface for customized sleep cycles.

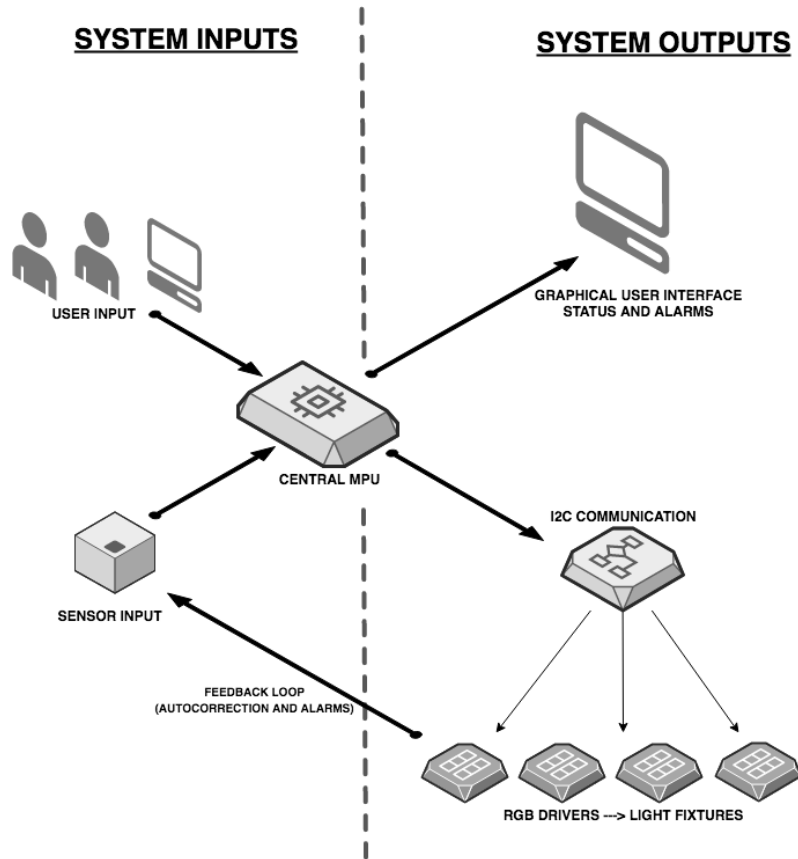


Fig. 1: High Level System Overview

2 Final Design Specifications

The Intelligent Lighting Control System is comprised of two interconnected parts, the control system and lighting modules. Our control system includes the Arduino UNO R3 for analog/digital input and output, 4DUINO development board for touch-screen graphical user interface (GUI), AC to DC conversion power supply, RGB light and temperature sensors. Each light module includes 3 RGB LED's, aluminum heat shield, Infineon RGB driver, and 3D printed housing for all parts.

Our control system features a light compensation algorithm which accounts for light degradation. The main issue identified by NASA engineers is light degradation due to yellowing of the light covers. Our sensors will measure the amount of red, green, and blue light spectrum generated from our light fixtures. If at any time the light spectrum emitted does not match the light spectrum measured the algorithm will begin adjusting the output of the light driver until the spectrum is back to normal.

The control system also allows the user to input a custom circadian-based cycle on a touchscreen interface. The interface allows central control of all light fixtures so that each light can be set to a different cycle to allow for shift work. The I2C (pronounced "I squared C") communication protocol allows us to control individual devices on a single bus which reduces the amount of cabling needed in the system.

The lighting modules have a two-piece modular design. The top piece can be permanently fixed to a ceiling or wall. The bottom piece which contains the LED's is screwed into the top piece with a threaded pattern on the outside which easily allows crew to replace LED's which have failed during flight. Each light module is equipped with heat shield and temperature sensor. In the event of overheating, the control system will trigger alarms to alert the crew of the issue.

3 Design Solution

3.1 Lighting Modules

We set out to design a modular light fixture with interchangeable easy to replace parts. The lighting modules use Red-Blue-Green (RGB) light emitting diodes to produce a wide spectrum of light. Each lighting module features an independent current driver board with microprocessor which can communicate with our central microprocessor unit. The light fixture also features an interior aluminum heat shield and temperature sensor to manage excess heat and alert the control system of dangerous temperature levels.

RGB Light Emitting Diodes

This will include specs on the modules we used as well as the heat shield

RGB LED Driver

Discuss the parts of the development board, the buck converter, the current limiter

Light Fixture Housing

Show drawings and discuss modular design of the pieces

3.2 Control System

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

Central Microprocessor Unit

Discuss Arduino, code, I2C protocol, Light Degradation Algorithm

Graphical User Interface

4duino, GMT clock, wifi?, display?

Sensors

Here we will discuss the temperature and light sensors

3.3 Display Model

Here we will talk about the wooden display model we built and make it clear that it is not part of the system, only for display

9 References

- [1] EV/Human Interface Branch. Intelligent lighting control system — topic - tdc-25-s19. http://www.tsgc.utexas.edu/challenge/PDF/topics/Topic_TDC_25_S19.pdf, 2016.
- [2] Elizabeth Howell. Space station to get new insomnia-fighting light bulbs. <https://www.space.com/18917-astronauts-insomnia-light-bulbs.html>, 2012.
- [3] Kurt R. Kessel. Lighting system to improve circadian rhythm control. <https://technology.nasa.gov/patent/KSC-TOPS-52>, 2016.