

**mikazone**



**Shandong Meikai Chemical  
Technology Co., Ltd**

📞 Móvil: +86-531-5859 5332  
✉ E-mail: [mika@mikachemical.com](mailto:mika@mikachemical.com)  
🌐 Web: [https:// mikazone.com/company/](https://mikazone.com/company/)  
📍 Jinan, Shandong, China



**Importadora Mandalas C.A**  
**Distribuidor autorizado en Venezuela**

TAX RIF J-408358697  
📞 +58 4147 8287 00  
✉ [Ventas@mandalasproductos.com](mailto:Ventas@mandalasproductos.com) (en inglés)  
📍 Caracas, Venezuela

Revised Date 2026.09.04



Add power to your formula

**Coating Solutions ●**  
**Mortar Solutions ●**  
**Concrete Solutions ●**





//

## Building Better Solutions Together

At MIKAZONE, we are committed to delivering innovative and reliable chemical solutions that enhance performance, optimize formulations, and create lasting value for our customers.

Our diverse portfolio of cellulose ethers, polymer powders, concrete admixtures, and specialty chemicals serves a wide range of industries, helping customers meet evolving performance and sustainability needs.

//

# CONTENTS

---

|                                             |       |
|---------------------------------------------|-------|
| ABOUT MIKAZONE .....                        | 01-02 |
| Cellulose Ether—HPMC MHEC .....             | 03-04 |
| Cellulose Ether—HEC .....                   | 05-06 |
| MIKA VAE Redispersible Polymer Powder ..... | 07-08 |
| Hydroxypropyl Starch Ether .....            | 09-10 |
| PCE Superplasticizer .....                  | 11-12 |
| Silicone Hydrophobic Powder SHP .....       | 13-14 |
| Gypsum Retarder .....                       | 15-16 |
| Rheology Modifier S400 .....                | 17    |
| Calcium Formate — Industrial Grades .....   | 18    |
| Powder Defoamer .....                       | 19-20 |
| Polypropylene Monofilament Fiber .....      | 21    |
| Synthetic Macrofiber .....                  | 22    |
| Packaging & Storage .....                   | 23-24 |

# ABOUT MIKAZONE®

## Your Global Partner in Construction Additive Solutions

MIKAZONE is a specialized manufacturer engaged in the research, development, production, and marketing of chemical additives for construction materials.

Our products are widely used in tile adhesives, dry-mix mortars, wall putties, thermal insulation systems (EIFS), gypsum-based materials, waterproofing systems, architectural coatings, and ready-mix products.

With a strong commitment to quality and innovation, we provide high-performance products and comprehensive technical solutions that help improve the quality, efficiency, and sustainability of modern construction materials.

Backed by extensive industry experience, a modern production facility, and a strict quality control system, MIKAZONE has developed a comprehensive product portfolio covering cellulose ethers, redispersible polymer powders, polycarboxylate ether (PCE) superplasticizers, and other functional additives.



Today, MIKAZONE products are exported to Latin America, Europe, the Middle East, Africa, and Asia, establishing long-term and stable partnerships with construction material manufacturers around the world.

Our goal is to provide reliable products, professional technical support, and customized solutions that contribute to the success of our customers.



# CELLULOSE ETHER—HPMC MHEC

Cellulose Ether is derived from refined cotton, a high-purity natural raw material, through advanced etherification processes.

It functions as a multifunctional additive, providing water retention, thickening, and rheology control in a wide range of construction and industrial systems.

## KEY BENEFITS


- ✓ Enhanced Water Retention
- ✓ Improved Workability
- ✓ Increased Sag Resistance
- ✓ Extended Open Time
- ✓ Enhanced Tensile Strength
- ✓ Optimized Water Demand



## CELLULOSE ETHER SELECTION GUIDE

| Application                        | Viscosity      | Dosage (%) | Performance                                   |
|------------------------------------|----------------|------------|-----------------------------------------------|
| High Temperature / Dry Conditions  | High           | 0.15–0.25  | Reduced water evaporation; stable performance |
| Thick-Layer Applications (>10 mm)  | Medium to High | 0.25–0.40  | Balanced workability and water retention      |
| Thin-Layer / Self-Leveling Systems | Low            | 0.30–0.60  | Improved flowability; consistent performance  |

## RECOMMENDED APPLICATIONS

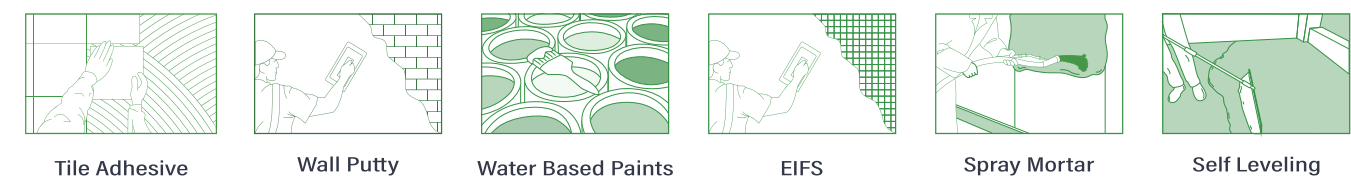


## SELECTION GUIDE

| HPMC               | MHEC               | Viscosity NDJ (2%) | Brookfield (2%) |
|--------------------|--------------------|--------------------|-----------------|
| MK04P              | MK04E              | ~400               | 400             |
| MK5P               | MK5E               | ~5,000             | 4,000-6,000     |
| MK10P              | MK10E              | ~10,000            | 8,000-12,000    |
| MK40P (S)          | MK40E (S)          | ~40,000            | 20,000-25,000   |
| MK75P (R / L / S)  | MK75E (R / L / S)  | ~75,000            | 30,000-40,000   |
| MK100P (R / L / S) | MK100E (R / L / S) | ~100,000           | 40,000-50,000   |
| MK150P (R / L / S) | MK150E (R / L / S) | ~150,000           | 55,000-65,000   |
| MK200P (R / L / S) | MK200E (R / L / S) | ~200,000           | 65,000-75,000   |

| CODE   | Definition           |
|--------|----------------------|
| MK     | Brand: MIKAZONE      |
| 04–200 | Viscosity Grade      |
| P      | Standard HPMC        |
| E      | Standard MHEC        |
| R      | Modified             |
| L      | Improved workability |
| S      | Surface Treated      |

## Viscosity comparison

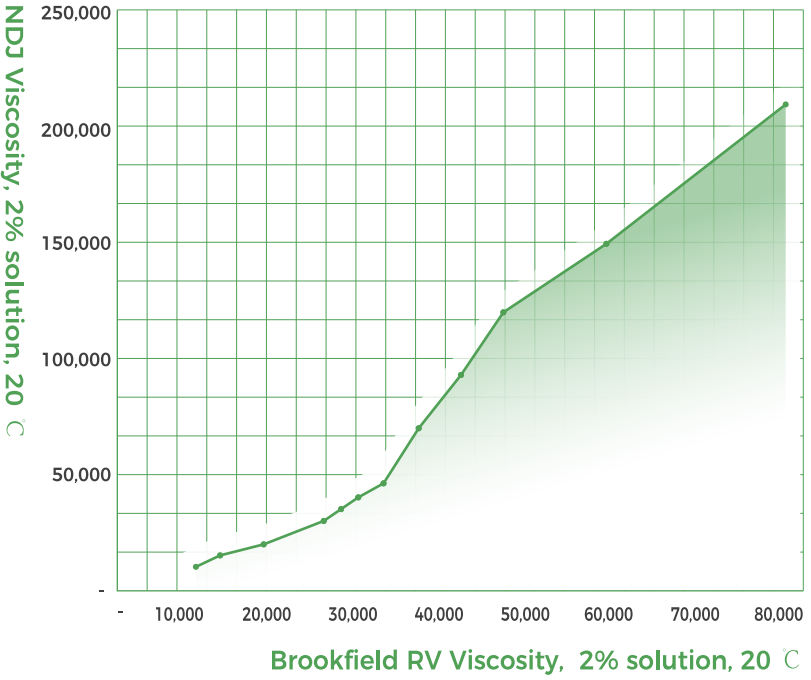

# CELLULOSE ETHER—HEC

MIKAZONE® HEC is a high-performance, non-ionic cellulose ether offering excellent thickening, water retention, suspension, stabilization, and rheological control.

It is widely used in paints & coatings, adhesives, polymer emulsions, construction materials, and specialty chemicals.

Our comprehensive HEC range includes standard, biostable, hydrophobically modified, associative, construction, and polymerization grades, providing reliable solutions for diverse formulation needs.

Benefits of MikaZone® HEC applied to paints & coatings:

- Excellent color acceptance and viscosity stability
- Long open time and effective water retention
- Good rheological properties, dispersion and solubility
- Excellent workability and improved spattering resistance



| Product Categories         | mikazone Grade | Viscosity (Brookfield 2%) | Viscosity (1%) | Performance                                                                     |
|----------------------------|----------------|---------------------------|----------------|---------------------------------------------------------------------------------|
| Normal & Standard (HE)     | MK15HE         | 800–1,500                 | —              | Excellent thickening effect with high cost efficiency                           |
|                            | MK30HE         | 1,500–2,500               | —              |                                                                                 |
|                            | MK60HE         | 2,500–3,500               | —              |                                                                                 |
|                            | MK100HE        | 3,500–5,000               | —              |                                                                                 |
|                            | MK150HE        | 4,500–6,000               | —              |                                                                                 |
|                            | MK200HE        | 6,000–8,000               | —              |                                                                                 |
| Dispersant                 | HEC LR         | 7–15                      | —              | Dispersant for emulsion polymerization;<br>Dispersant for color paste/colorant  |
|                            | HEC ER         | 80–150                    | —              |                                                                                 |
|                            | HEC GR         | 250–400                   | —              |                                                                                 |
| Biostable (HE-BE)          | MK2HEB         | 1,500–2,500               | —              | High degree of substitution;<br>Excellent biological stability                  |
|                            | MK5HEB         | 4,500–6,500               | —              |                                                                                 |
|                            | MK15HEB        | —                         | 800–1,500      |                                                                                 |
|                            | MK30HEB        | —                         | 1,500–2,500    |                                                                                 |
|                            | MK60HEB        | —                         | 2,500–3,500    |                                                                                 |
|                            | MK80HEB        | —                         | 3,000–4,000    |                                                                                 |
| Hydrophobic Modified (MEB) | MK100HEB       | —                         | 4,000–6,000    | Excellent dispersibility;<br>Excellent suspension stability                     |
|                            | MK4MEB         | 3,000–5,000               | —              |                                                                                 |
|                            | MK15MEB        | —                         | 800–1,500      |                                                                                 |
|                            | MK30MEB        | —                         | 1,500–2,500    |                                                                                 |
|                            | MK60MEB        | —                         | 2,500–3,500    | Enhanced overall performance;<br>Excellent scrubbing resistance                 |
|                            | MK80MEB        | —                         | 3,000–4,000    |                                                                                 |
|                            | MK100MEB       | —                         | 3,500–5,000    |                                                                                 |
|                            | MK6000MEB      | —                         | 5,000–7,000    |                                                                                 |
|                            | MK7000MEB      | —                         | 6,000–8,000    | Excellent thickening performance                                                |
|                            | MK8000MEB      | —                         | 7,000–9,000    |                                                                                 |
| Associative (MHE)          | MK10000MEB     | —                         | 9,000–12,000   | Excellent leveling, anti-spattering and anti-sagging                            |
|                            | MK300XHE       | —                         | 200–500        |                                                                                 |
|                            | MK500XHE       | —                         | 350–750        |                                                                                 |
|                            | MK900XHE       | —                         | 600–1,200      |                                                                                 |
| Constructions (PXE)        | MK2000XHE      | —                         | 1,500–2,500    | Thickening & viscosity<br>Water retention & open time<br>Economical alternative |
|                            | MK4PXE         | 4,000                     | —              |                                                                                 |
|                            | MK10PXE        | 10,000                    | —              |                                                                                 |
|                            | MK20PXE        | 21,000                    | 800–1,500      |                                                                                 |
|                            | MK30PXE        | —                         | 1,500–2,500    |                                                                                 |
|                            | MK60PXE        | —                         | 2,500–3,500    |                                                                                 |
|                            | MK80PXE        | —                         | 3,000–4,000    |                                                                                 |
|                            | MK100PXE       | —                         | 3,500–5,000    |                                                                                 |
|                            | MK200PXE       | —                         | 5,500–6,500    |                                                                                 |
|                            |                |                           |                |                                                                                 |



# MIKA VAE REDISPERSIBLE POLYMER POWDER

MIKA VAE Redispersible Polymer Powder is a high-performance polymer powder designed to improve the adhesion, flexibility, crack resistance, water resistance, and workability of cement- and gypsum-based dry-mix products. It is widely used in tile adhesives, wall putties, renders, self-leveling compounds, EIFS, repair mortars, and waterproofing systems.

## ✓ KEY BENEFITS

 **Adhesion**

Strong bonding across various substrates

 **Mechanical Resistance**

Stable performance under stress and deformation

 **Cohesion**

Better internal strength and application consistency

 **Flexibility**

Improved deformability and crack resistance

 **Water Resistance**

Enhanced moisture resistance and durability



## ✓ TYPICAL APPLICATIONS

- Tile Adhesives
- Tile Grout and Joint Fillers
- Wall Putty and Skim Coat
- Cement- and Gypsum-Based Mortars
- EIFS / ETICS Systems
- Self-Leveling Compounds
- Waterproofing and Repair Mortars

| Technical Data     | 1610N    | 1620N         | 3510N            | 3520N            | 3530N            | 5012L         | 5045E           | 8025H            | 8027H            | 9038H            |
|--------------------|----------|---------------|------------------|------------------|------------------|---------------|-----------------|------------------|------------------|------------------|
| Polymer Type       | VAE      | VAE           | VAE              | VAE              | VAE              | VAE           | VAE             | VA/VV/AC         | VA/VV/AC         | VA/VV/AC         |
| Protective Colloid | PVA      | PVA           | PVA              | PVA              | PVA              | PVA           | PVA             | PVA              | PVA              | PVA              |
| Solid Content(%)   | ≥99      | ≥99           | ≥99              | ≥99              | ≥99              | ≥99           | ≥99             | ≥99              | ≥99              | ≥99              |
| Ash Content(%)     | 14±2     | 14±2          | 12±2             | 12±2             | 12±2             | 12±2          | 12±2            | 12±2             | 12±2             | 12±2             |
| Bulk Density(g/l)  | 400–600  | 400–600       | 400–600          | 400–600          | 400–600          | 400–600       | 400–600         | 400–600          | 400–600          | 400–600          |
| Tg (°C)            | 15       | 0             | 15               | 0                | -15              | 0             | 0               | -10              | -12              | -15              |
| MFFT (°C)          | 4        | 1             | 4                | 1                | 0                | 0             | 1               | 0                | 0                | 0                |
| PH Value           | 6–8      | 6–8           | 6–8              | 6–8              | 6–8              | 6–8           | 6–8             | 6–8              | 6–8              | 6–8              |
| Type               | Rigid    | Semi-Flexible | Rigid            | Semi-Flexible    | Flexible         | Semi-Flexible | Semi-Flexible   | Flexible         | Flexible         | High Flexible    |
| series             | Standard | Standard      | High performance | High performance | High performance | levelling     | Premium quality | Hydrophobic type | Hydrophobic type | Hydrophobic type |

# HYDROXYPROPYL STARCH ETHER

**Hydroxypropyl Starch Ether (HPS)** is a fine white powder produced by the reaction of starch and propylene oxide under strong alkaline conditions. It has good fluidity and water solubility; its aqueous solution is transparent and colorless with good stability.

## ✓ TECHNICAL DATA

| Appearance                           | white powder, free-flowing |
|--------------------------------------|----------------------------|
| Solid content                        | ≥98.0%                     |
| Ph Value (2%, 25℃)                   | Alkaline, 8-11.5           |
| Viscosity (5%, 20℃ aqueous solution) | 2,000-6,000mpa.s           |
| Loss on drying                       | ≤10.0%                     |
| Hydroxypropyl Content                | 18.0-25.0%                 |
| Bulk Density                         | 0.45-0.61 g/cm3            |

## ✓ APPLICATIONS

**Hydroxypropyl starch ether (HPS)** is suitable for various types of cement, gypsum, gray calcium-based interior and exterior wall putty, and various types of finishing mortars and plastering mortars.

It has good compatibility with other building materials and is especially suitable for construction dry mixes such as mortars, adhesives, plasters, and roller plasters.




## ✓ CHARACTERISTICS

**Hydroxypropyl starch ether** is mainly used as a thickener in mortar to improve the sag resistance of mortar, reduce the adhesion of wet mortar, extend the opening time, etc. It is usually used in combination with hydroxypropyl methylcellulose. Hydroxypropyl starch ether is cost-effective and can partially replace more expensive additives. Low dosages can provide a good thickening effect, improve the workability of dry-mix mortars, prevent knife sticking, and improve adhesion to the substrate.

The recommended dosage of hydroxypropyl starch ether (HPS) is 0.1%-0.2%.

## ✓ BENEFITS

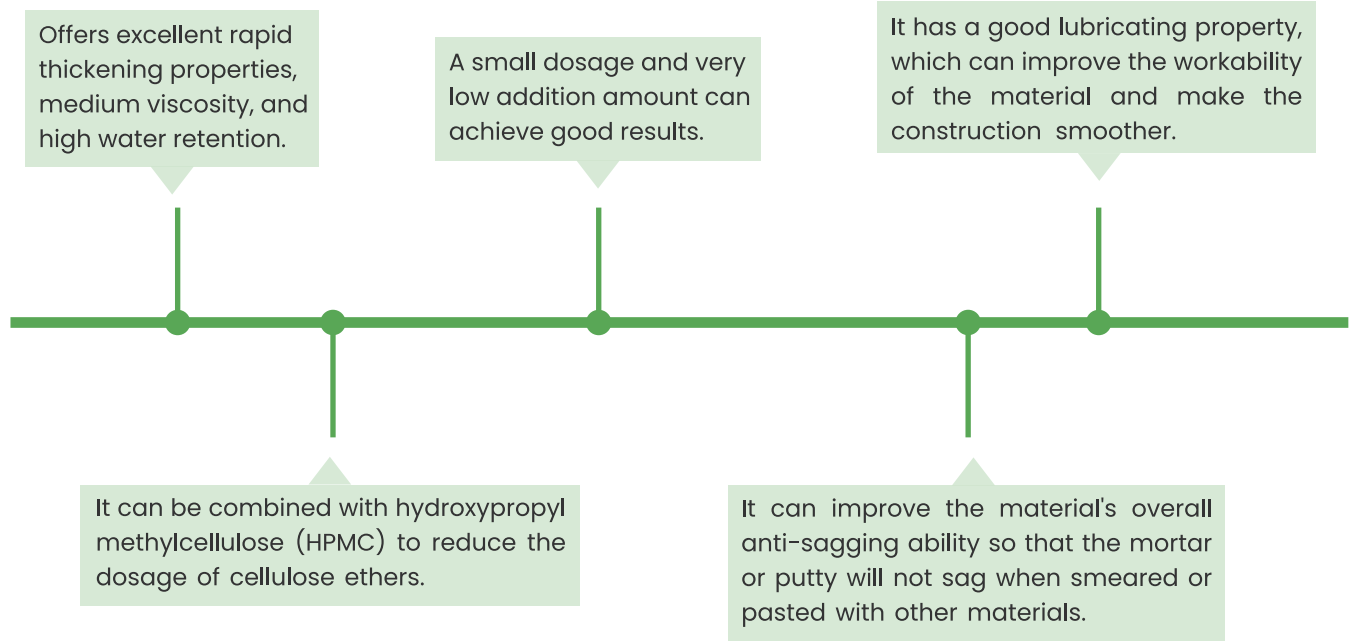


## ✓ PACKAGING & STORAGE

It is generally packed in 25kg bags. The product is sensitive to moisture and must be stored in a dry and cool place in its original packaging.

**CAS Number:9049-76-7**

PCE SUPERPLASTICIZER

MikaZone® Polycarboxylate Superplasticizer excels in high water reduction and viscosity reduction, enhancing flowability without compromising strength. It ensures seamless application in challenging environments. Highly recommended for projects requiring rapid placement and superior finish, such as industrial flooring or structural repairs. Its low viscosity and adaptability to complex formulations make it a top choice for demanding construction scenarios where precision and durability are critical.

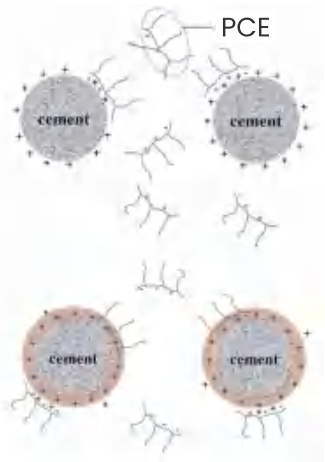

- Mikazone PCE Superplasticizer delivers high water reduction through dual dispersion mechanisms:
- Electrostatic repulsion from charged particle surfaces
  - Steric hindrance between polycarboxylate molecules

ADVANTAGES OF MIKAZONE PCE SUPERPLASTICIZER:



- Rapid Dispersion:** Significantly reduced mixing time.
- High Water Reduction:** Substantially lowers water demand.
- Excellent Slump Retention:** Maintains flowability over extended periods.
- Superior Workability:** Excellent cohesion, minimizes bleeding and segregation, enhances pumpability.
- Broad Compatibility:** Works effectively with Portland cement, ordinary Portland cement, slag cement, fly ash cement, and various mineral admixtures.

THE CHARACTERISTICS OF PCE

| Item                            | Specification                              |
|---------------------------------|--------------------------------------------|
| Appearance                      | Free-flowing, white or light yellow powder |
| Bulk Density                    | 600 ±100 g/L                               |
| Active Content                  | ≥90%                                       |
| Residual Moisture               | ≤3%                                        |
| pH Value (10% Aqueous Solution) | 7.0-9.0                                    |
| Water Reduction Rate (Mortar)   | ≥25%                                       |



APPLICATION RECOMMENDATIONS FOR PCE

| Mikazone Model | Injection Material | Compacted Concrete | UHPC | Cement-Based Prefab Components | Self-Leveling Cement | Repair & Support Mortar | Waterproof Mortar | Self-Leveling Gypsum | Gypsum-Based Prefab Components |
|----------------|--------------------|--------------------|------|--------------------------------|----------------------|-------------------------|-------------------|----------------------|--------------------------------|
| PC 201         | ●●●                | ●●●                | ●●   | ●●                             |                      |                         |                   |                      |                                |
| PC 202         | ●                  | ●                  |      |                                | ●●●                  | ●●●                     | ●●●               |                      |                                |
| PC 203         |                    |                    |      |                                |                      |                         |                   | ●●●                  | ●●●                            |
| PC 204         | ●●                 | ●●                 | ●●●  | ●●●                            | ●●                   | ●●                      |                   | ●●                   | ●●                             |

●●● – Highly Recommended    ●● – Recommended    ● – Suitable



# SILICONE HYDROPHOBIC POWDER SHP

MikaZone® SHP is a powdery water repellent agent. The primary function of Silicone Hydrophobic Powder is to make surfaces resistant to water while still maintaining vapor permeability. The working principle of silicone hydrophobic agents involves forming a fine coating on the surface, creating microscopic structures that reduce surface energy, causing water droplets to roll off the surface rather than penetrate.

MikaZone® SHP can be added to the dry mix of cement-based mixed materials to improve the water-repellent properties of the material itself. In applications such as plaster, plastering, caulking, external wall insulation system, decorative mortar and exterior wall painting, it can form a barrier to prevent liquid water from penetrating through capillaries.

## ✓ APPLICATIONS BENEFITS

- ◆ Outstanding water repellency with beading effect
- ◆ Powder form, easy to use in dry-mix mortar systems
- ◆ Excellent compatibility with other materials
- ◆ Long-lasting performance, maintains water repellency over time
- ◆ No negative impact on mechanical strength
- ◆ Environmentally friendly



## ✓ PHYSICAL PROPERTIES

| Grade            | MikaZone® SHP |
|------------------|---------------|
| Appearance       | White powder  |
| Bulk Density     | 250-400 g/L   |
| Particle Size    | 200 mesh      |
| Moisture Content | <3%           |
| pH Value         | 10~12         |
| Dosage           | 0.15-0.35%    |



GYPSUM RETARDER

MikaZone® Gypsum Retarder is a chemical additive designed for the construction and building industry. Its primary function is to control and extend the setting time of gypsum-based materials, especially gypsum plaster and gypsum board compounds.


By effectively delaying the setting process, this retarder provides extended workability time, ensuring materials can be applied and finished properly. This enhancement in workability allows for smoother application and significantly reduces the risk of premature setting, which can otherwise lead to uneven surfaces or imperfections.

APPLICATION FIELDS

- ◆ Gypsum Self Leveling
- ◆ Gypsum Plaster
- ◆ Gypsum Putty
- ◆ Prefabricated Gypsum Components
- ◆ Other Gypsum Applications



IN GYPSUM-BASED SYSTEMS

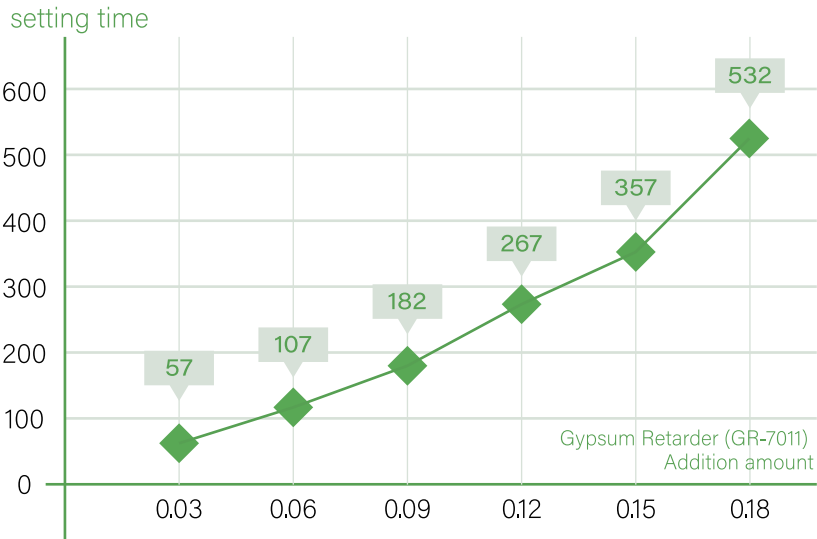

Tested Pure gypsum formula: plaster powder: 100 water :60

- ⌚ Extended Setting Time
- ↓ Reduced Material Waste
- 🔍 Improved Workability
- 🔄 Consistent Results
- 🧩 Versatility
- 👉 Ease of Application

Adjust the setting time of both GR-7011 and citric acid to around 60 minutes and evaluate their effects on the gypsum system.

| Product                   | Dosage [%] | Initial Set (min) | Final Set (min) | 2h Flexura. Strength (MPa) | 2h Compressive Strength (MPa) | 2d Flexural Strength (MPa) | 2d Compressive Strength (MPa) |
|---------------------------|------------|-------------------|-----------------|----------------------------|-------------------------------|----------------------------|-------------------------------|
| MikaZone® Gypsum Retarder | 0.5        | 60                | 67              | 3.2                        | 10.4                          | 6.4                        | 20.1                          |
| Citric Acid               | 1.5        | 56                | 63              | 2.5                        | 9.4                           | 5.2                        | 18.5                          |

Self-Leveling Gypsum (Gypsum 950 + Cement 50 + Water Reducer 1.5 + Defoamer 0.4 + Fibers 0.4)





# RHEOLOGY MODIFIER S400

## OVERVIEW

Rheology modifier S400 is a modified water-soluble biological polymer material, featuring excellent hydrophilicity, colloidal dispersion, suspension, thickening and thixotropic properties. It is an additive that can keep fine particles in a suspended state in liquids such as cement slurry, self-leveling compound and mortar.

## TECHNICAL INDEX

| Item                   | Index                          |
|------------------------|--------------------------------|
| Physical Form          | Powder                         |
| Ph (1%)                | 8-10                           |
| Appearance             | White to light grey            |
| Moisture               | 1%-4%                          |
| Viscosity (Brookfield) | 1500-3000cp(5%); 100-400cp(1%) |
| Bulk Density(G/Cm3)    | 700-900                        |

## APPLICATION AREAS

gypsum self-leveling compounds, and cement-based self-leveling floors.

## FEATURES

- Suspension capability
- Water retention
- Workability enhancement
- Adjustable viscosity
- Improved flow behavior
- Material compatibility



# CALCIUM FORMATE — INDUSTRIAL GRADES

## Early Strength Accelerator

High-purity Calcium Formate designed for construction applications. It effectively accelerates cement hydration, enhances early strength development, and improves overall construction efficiency.



## KEY FEATURES

- Fast Setting Performance
- Enhanced Early Strength
- Excellent Low-Temperature Adaptability
- Stable Quality & Consistent Performance

## TECHNICAL SPECIFICATIONS

| Item                          | Specification | Item                      | Specification |
|-------------------------------|---------------|---------------------------|---------------|
| Calcium Formate Content (w/%) | ≥ 98.0        | Water Insoluble (w/%)     | ≤ 1.0         |
| Calcium (Ca) Content (w/%)    | ≥ 30.1        | Moisture (w/%)            | ≤ 0.50        |
| Lead (Pb)(mg/kg)              | ≤ 5.0         | pH (10% Aqueous Solution) | 6.0 – 8.0     |
| Arsenic (As) (mg/kg)          | ≤ 2.0         |                           |               |

## PACKAGING

- 25 kg plastic woven bags or paper-plastic composite bags
- 1200 kg jumbo bags
- Customized packaging available upon request

## APPLICATIONS



Tile Adhesives

Dry Mix Mortar

Concrete Early Strength Additive

# POWDER DEFOAMER

MikaZone® Powder Defoamer is formulated with modified polyether compounds and polymers that possess unique properties, making it highly effective at breaking down and suppressing foam.



It works by destabilizing and collapsing foam bubbles, reducing surface tension and enhancing air release—thus preventing the formation of unwanted foam. Its innovative modified polyether composition provides superior performance and greater versatility compared to traditional defoaming agents.

## ✓ APPLICATIONS

- Self-leveling compounds
- Waterproof mortar
- Repair mortar
- Grout mortar
- Decorative mortar
- Injection mortar

## ✓ ADVANTAGES OF POWDER DEFOAMER

- ◆ Excellent defoaming efficiency with low dosage
- ◆ Fast defoaming speed and long-lasting foam suppression
- ◆ Does not affect the fundamental properties of mortar systems
- ◆ Good dispersibility and permeability
- ◆ Chemically stable with good heat and oxidation resistance

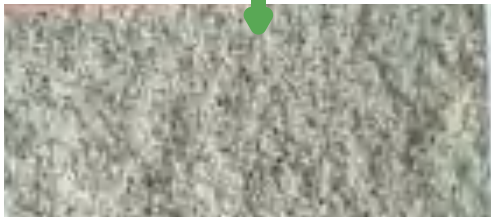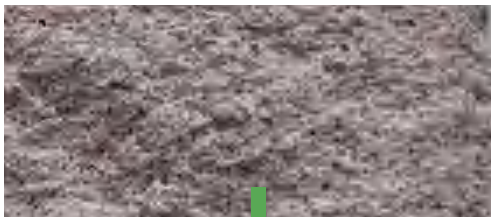

Add defoamer. After the mortar hardens, observe the cross-section. The bubbles are significantly reduced.

## ✓ PHYSICAL PROPERTIES

| Grade                 | DE401           | DE402                 |
|-----------------------|-----------------|-----------------------|
| Usage Environment     | Alkaline System | Neutral/Acidic System |
| Bulk Density          | 500±100g/L      | 500±100g/L            |
| Particle Size         | 80 mesh         | 80 mesh               |
| Moisture Content      | ≤5%             | ≤5%                   |
| PH Value              | 6-8             | 6-8                   |
| Dosage Recommendation | 0.1~0.3%        | 0.1~0.3%              |





# POLYPROPYLENE MONOFILAMENT FIBER

Polypropylene Monofilament Fiber is a high-quality synthetic fiber designed to improve the crack resistance and durability of concrete, mortar, and other cement-based materials. Its fine monofilament structure provides excellent dispersion throughout the cementitious matrix, forming a three-dimensional reinforcing network that helps control plastic shrinkage and early-age cracking. The fiber effectively reduces the formation and propagation of microcracks, while improving cohesion, impact resistance, surface integrity, and durability. It is lightweight, corrosion-resistant, chemically stable, and easy to mix, making it an ideal solution for enhancing the overall performance of concrete and mortar in a wide range of applications.



## BENEFITS

Crack Prevention

Enhanced Durability

Corrosion & Alkali Resistant

Excellent Workability

Eco-Friendly Alternative



## TECHNICAL DATA

| Item                   | Parameters                | Item             | Parameters |
|------------------------|---------------------------|------------------|------------|
| Composition            | 100% Virgin Polypropylene | Tensile Strength | ≥500MPa    |
| Diameter               | 30-32 μm                  | Elastic Modulus  | ≥3.5GPa    |
| Length                 | 3mm,6mm,12mm(Customized)  | Elongation       | 20 - 25%   |
| Alkali&Acid Resistance | High                      | Melting Point    | 160-170 °C |

# SYNTHETIC MACROFIBER

## DESCRIPTION

Synthetic Macro Fiber is a high-performance polypropylene fiber specially designed for structural reinforcement of concrete and cement-based mortars. Available in both Curved (Bamboo Shape) and Embossed profiles, the fiber provides enhanced mechanical anchorage, interfacial bonding, and friction within the cementitious matrix. The optimized surface geometry improves fiber pull-out resistance and load transfer after cracking, effectively controlling crack propagation and enhancing post-cracking residual strength, toughness, impact resistance, and fatigue performance. As a lightweight and corrosion-resistant alternative to conventional steel fibers, Synthetic Macro Fiber offers easy handling, efficient mixing, and reliable long-term reinforcement for a wide range of concrete and mortar applications.

## SPECIFICATIONS

|                        |                                          |
|------------------------|------------------------------------------|
| Length                 | 36mm, 38mm, 40mm, 48mm, 50mm, Customized |
| Color                  | Transparent                              |
| Fiber Diameter         | 0.6, 0.8, 1.0 mm                         |
| Tensile Strength       | ≥400MPa                                  |
| Elastic Modulus        | ≥3500MPa                                 |
| Elongation             | 15-25%                                   |
| Specific Density       | 0.91g/cm³                                |
| Melting Point          | 160-170°C                                |
| Acid&Alkali Resistance | High                                     |
| Water Absorption       | Nil                                      |

## BENEFITS

- 01 Provides excellent plastic shrinkage crack reduction and settlement control
- 02 Increases plasticity of destruction
- 03 Increases flexural toughness, impact and shatter resistance
- 04 Increased durability due to high chemical resistance and corrosion free

## APPLICATIONS

- 01 Shotcrete
- 02 Concrete pavement
- 03 Thin wall precast
- 04 Slab on Grade and elevated construction



## PACKAGING & STORAGE

mikazone® products are packed in multi-layer paper bags with a PE-liner of 25kg net and supplied on pallets with shrink-wrapped.

20ft container MAX LOAD  
600kg/pallet\*20, Total 12,000kg

40ft container MAX LOAD  
700kg pallet \*40, Total 28,000kg



## Safety Information

mikazone® products are non-toxic under normal conditions of use. Please refer to the Material Safety Data Sheet (MSDS/SDS) or contact our service team for further information on safety.



mikazone® products should be stored in a dry and cool environment. It is recommended to use within 12 months.