

SHARP Air Conditioner With Technology IoT

AH-XP6YHY - AH-XP10YHY - AH-XP13YHY

AC IoT PLASMACLUSTER INVERTER



AH-XP6YHY | 0.5 PK | 370w
AH-XP10YHY | 1.0 PK | 780w
AH-XP13YHY | 1.5 PK | 1.130w



Smart Operation dengan IOT

Mengontrol AC melalui mobile phone, dari luar rumah, memonitor kualitas maupun konsumsi listrik



Teknologi Plasmacluster

Teknologi Ion Plasmacluster membersihkan kontaminan udara dan menciptakan ruangan yang nyaman.



J-Tech Inverter

Mengatur kinerja kompresor dengan lebih presisi untuk menghasilkan pendinginan maksimal dengan energi minimal




JetStreamG7

Mendinginkan ruangan yang panas dengan cepat dan seketika. Jetstream G7 beroperasi selama 30 menit.



Internet of Things merupakan sebuah konsep yang bertujuan untuk memperluas manfaat dari konektivitas internet yang tersambung secara terus menerus - Wikipedia -

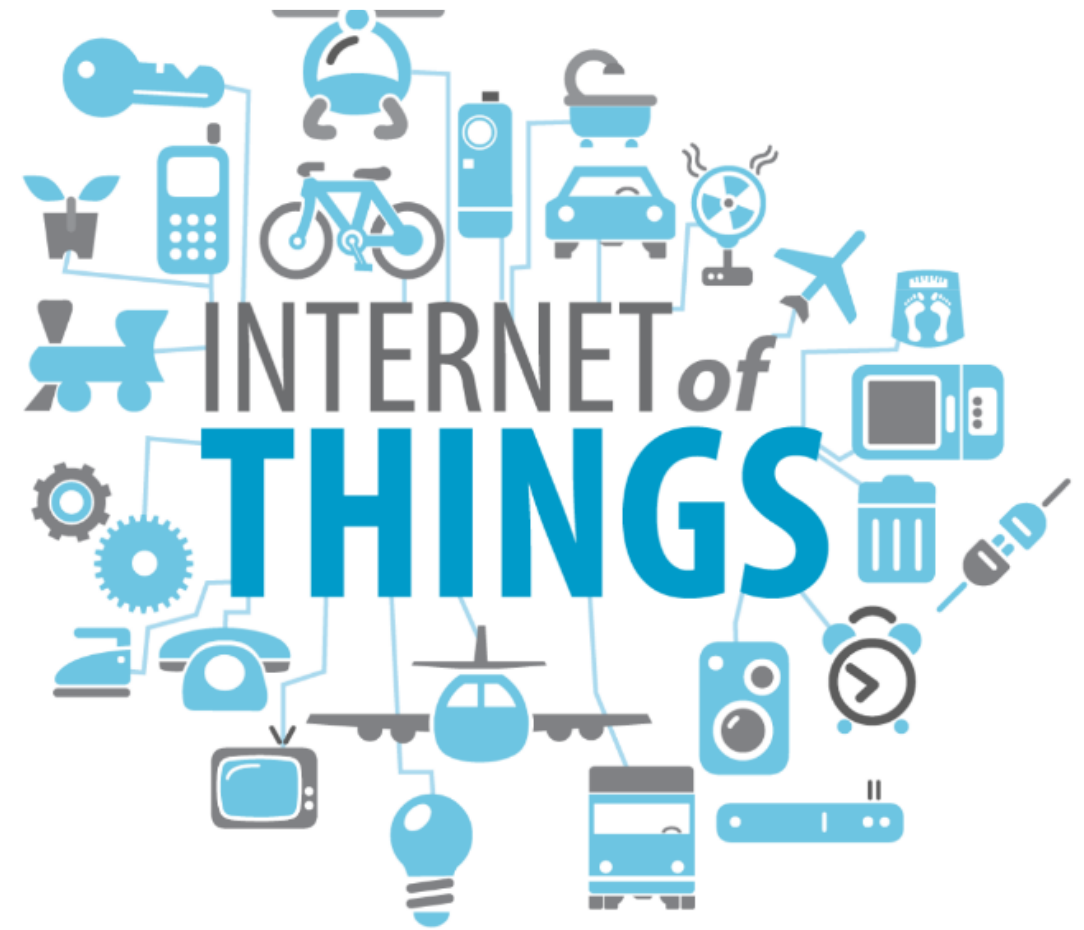




Smart Operation dengan IOT



Mengontrol AC melalui mobile phone(iOS & Android), dapat dilakukan kapan pun dan di mana pun.

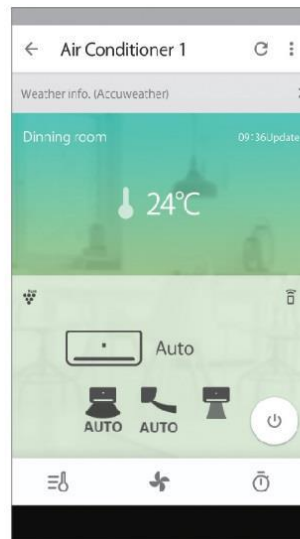


Melalui layar smartphone kita
Bisa mengontrol, mode operasi AC,
kondisi ruangan, dan konsumsi listrik




Teknologi Plasmacluster

Teknologi Ion Plasmacluster membersihkan kontaminan udara dan menciptakan ruangan yang nyaman.

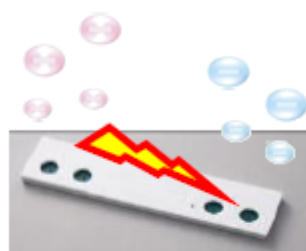


Ion Generator

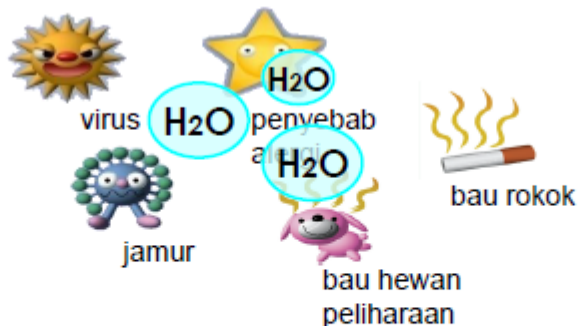

1. Ion Generator menghasilkan listrik tegangan tinggi untuk memecah uap air (H_2O) menjadi Ion Positif (H^+) dan Ion Negatif (OH^-).

2. Ion Plasmacluster secara aktif menyebar ke seluruh ruangan dan menon-aktifkan virus, jamur, bau rokok, dan bau tak sedap lainnya.

3. Udara ruangan Bersih dan Sehat untuk seluruh keluarga.

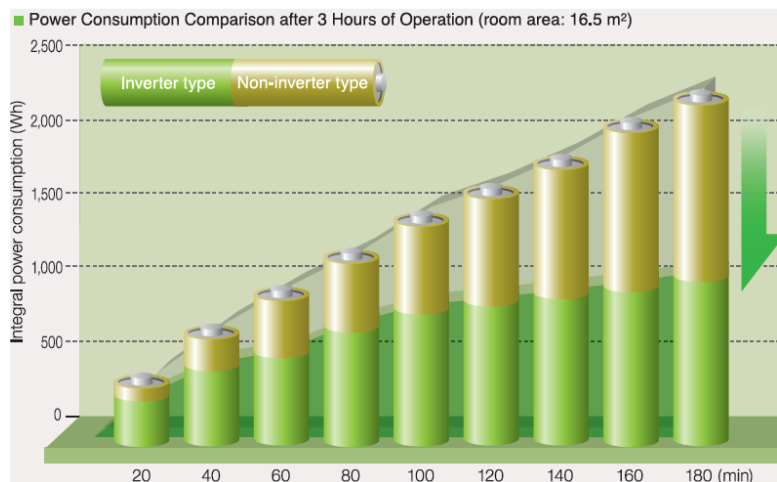

J-Tech Inverter

Mengatur kinerja kompresor dengan lebih presisi untuk menghasilkan pendinginan maksimal dengan energi minimal




JetStreamG7

Mendinginkan ruangan yang panas dengan cepat dan seketika. Jetstream G7 beroperasi selama 30 menit.




Baby mode

Memberikan hembusan udara lembut dan menghindari angin AC mengenai kulit saat tidur

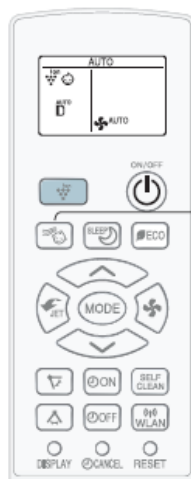



Best Sleep Mode

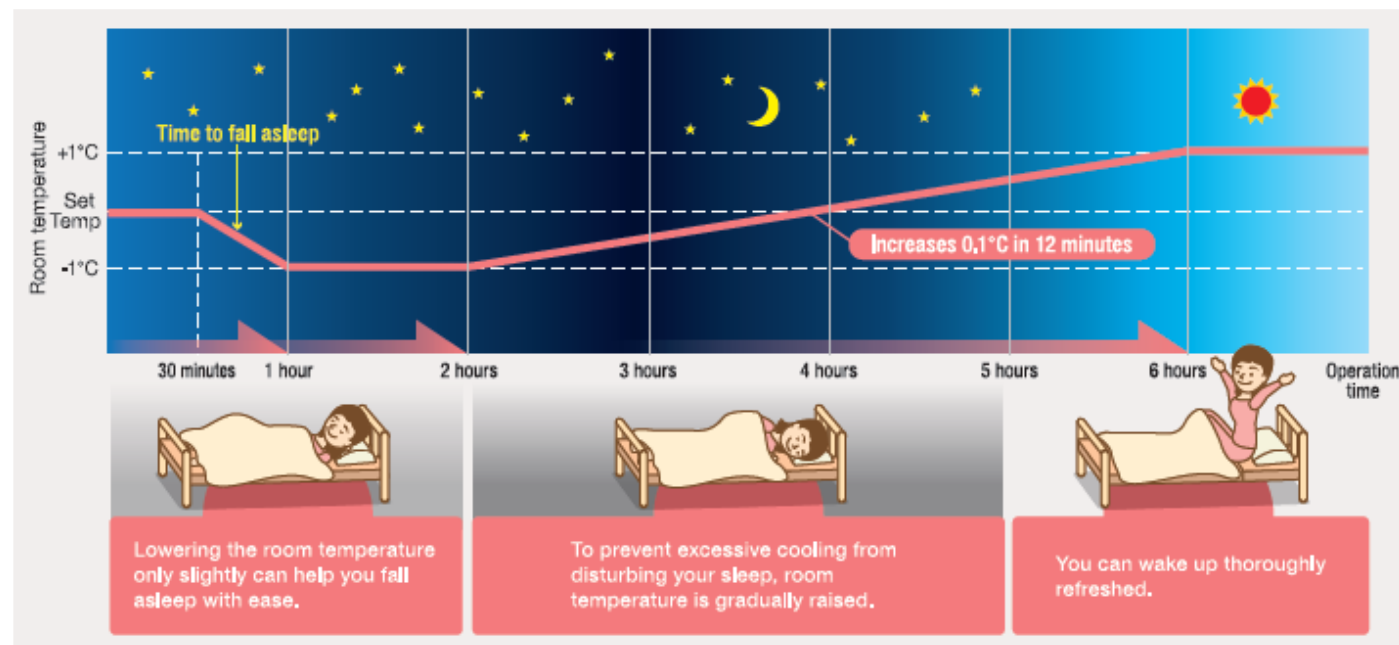

Memberikan kenyamanan tidur dengan pengaturan suhu secara otomatis saat **awal tidur, tidur lelap, dan menjelang bangun tidur**. Sehingga Anda tidak akan merasakan dingin sekali pada saat bangun di pagi hari !

AC AIoT PLASMACLUSTER INVERTER

AH-XP6YHY

AH-XP10YHY

AH-XP13YHY



MOTION SENSOR

Sensor yang dapat membaca dan mengetahui pergerakan dan jumlah orang di dalam ruangan.

Conditions

Air Conditioner

Banyak orang dan banyak pergerakan

Suhu turun, volume udara meningkat

Tidak Banyak orang, sedikit pergerakan

Kembali kepengaturan awal

Tidak ada orang dan pergerakan

Save mode aktif & memberi notifikasi



WHAT'S MAKE IT DIFFERENT?

FRESH INDOOR DESIGN



TOUGH OUTDOOR UNIT



Galvanized steel and Anti-corrosion paint appearance parts



High serviceability
Copper tube condenser

AH-XP6YHY

Specification

ITEMS		MODEL	INDOOR UNIT AH-XP6YHY	OUTDOOR UNIT AU-X6YHY	Fan system						
					Drive			Direct drive			
Cooling capacity (Min. - Max.)		kW	1.49 (0.84 - 2.05)		Air flow quantity (at cooling)	High	m³/min	7.2	21.9		
Moisture removal (at cooling)		Liters/h	0.3			Low	m³/min	6.1	-		
						Soft	m³/min	5.3	-		
						Quiet	m³/min	3.4	-		
Electrical data					Fan					Cross flow fan	Propeller fan
Phase			Single		Connections						
Rated frequency		Hz	50		Refrigerant coupling			Flare type			
Rated voltage		V	220		Refrigerant tube size	Gas		3/8" (Φ9.53mm)			
Rated current ☆ (Min. - Max.)		Cool	A	2.3 (1.1 - 3.7)		Liquid		1/4" (Φ6.35mm)			
Rated input ☆ (Min. - Max.)		Cool	W	370 (180 - 600)	Piping	Max. length		20 m			
Power factor ☆		Cool	%	73		Max. height difference		7 m			
						Additional refrigerant		10g/m (Piping length exceeds 7.5m)			
Compressor	Type	Hermetically sealed rotary type		Drain piping mm			O.D. Φ17 and Φ20				
	Model	Rechi 35W20QYN-F8#C		Air filter			Polypropylene net (Washable)				
	Oil charge	270cc (DZ-68X)									
Refrigerant system	Evaporator	Louver Fin and Grooved tube type		Net dimensions	Width	mm	879	598			
	Condenser	Louver Fin and Grooved tube type			Height	mm	289	495			
	Control	Capillary tube Φ2.5×Φ1.1×600mm			Depth	mm	229	265			
	Refrigerant (R32)	400g		Net weight		kg	8	18			
	De-Ice system	-									
Noise level (at cooling)	High	dB(A)	33	47							
	Low	dB(A)	29	-							
	Soft	dB(A)	27	-							
	Quiet	dB(A)	21	-							

AH-XP10YHY

Specification

ITEMS		MODEL		INDOOR UNIT AH-XP10YHY		OUTDOOR UNIT AU-X10YHY		Fan system					
								Drive		Direct drive			
Cooling capacity (Min. - Max.)		kW		2.64 (0.84 - 2.94)				Air flow quantity (at cooling)	High	m ³ /min	8.8	25.1	
Moisture removal (at cooling)		Liters/h		0.8					Low	m ³ /min	7.5	-	
Electrical data									Soft	m ³ /min	6.3	-	
									Quiet	m ³ /min	3.4	-	
Phase				Single				Fan		Cross flow fan	Propeller fan		
Rated frequency		Hz		50				Connections					
Rated voltage		V		220				Refrigerant coupling		Flare type			
Rated current ☆ (Min. - Max.)		Cool	A	4.7 (1.1 - 6.1)				Refrigerant tube size	Gas	3/8" (Φ9.53mm)			
Rated input ☆ (Min. - Max.)		Cool	W	780 (180 - 1000)					Liquid	1/4" (Φ6.35mm)			
Power factor ☆		Cool	%	75				Piping	Max. length		20 m		
Compressor		Type		Hermetically sealed rotary type					Max. height difference		7 m		
		Model		Rechi 35W20QYN-F8#C					Additional refrigerant		10g/m (Piping length exceeds 7.5m)		
		Oil charge		270cc (DZ-68X)				Drain piping mm		O.D. Φ17 and Φ20			
Refrigerant system		Evaporator		Louver Fin and Grooved tube type				Air filter		Polypropylene net (Washable)			
		Condenser		Louver Fin and Grooved tube type				Net dimensions		Width	mm	879	598
		Control		Capillary tube Φ2.5×Φ1.1=600mm						Height	mm	289	495
		Refrigerant (R32)		460g						Depth	mm	229	265
		De-Ice system		-				Net weight		kg	8	18	
Noise level (at cooling)		High	dB(A)	38	51								
		Low	dB(A)	33	-								
		Soft	dB(A)	29	-								
		Quiet	dB(A)	21	-								

AH-XP13YHY

Specification

ITEMS		MODEL		INDOOR UNIT AH-XP13YHY		OUTDOOR UNIT AU-X13YHY		Fan system					
								Drive			Direct drive		
Cooling capacity (Min. - Max.)		kW		3.52 (0.84 - 3.70)				Air flow quantity (at cooling)	High	m³/min	10.0	30.8	
Moisture removal (at cooling)		Liters/h		1.2					Low	m³/min	8.3	-	
									Soft	m³/min	6.3	-	
									Quiet	m³/min	3.4	-	
Electrical data													
Phase				Single				Fan			Cross flow fan	Propeller fan	
Rated frequency		Hz		50				Connections					
Rated voltage		V		220				Refrigerant coupling			Flare type		
Rated current ☆ (Min. - Max.)		Cool	A	5.7 (0.9 - 7.1)				Refrigerant tube size	Gas		3/8" (Φ9.53mm)		
									Liquid		1/4" (Φ6.35mm)		
Rated input ☆ (Min. - Max.)		Cool	W	1130 (180 - 1400)				Piping	Max. length		20 m		
Power factor ☆		Cool	%	90					Max. height difference		7 m		
									Additional refrigerant		10g/m (Piping length exceeds 7.5m)		
Compressor	Type		Hermetically sealed rotary type				Drain piping mm			O.D. Φ17 and Φ20			
	Model		KSK89D59UEZC				Air filter			Polypropylene net (Washable)			
	Oil charge		280cc (ESTEL OIL VG74)										
Refrigerant system	Evaporator		Louver Fin and Grooved tube type				Net dimensions	Width	mm	879	598		
	Condenser		Louver Fin and Grooved tube type					Height	mm	289	495		
	Control		Capillary tube Φ2.5×Φ1.1×400mm					Depth	mm	229	265		
	Refrigerant (R32)		410g				Net weight		kg	8	19		
	De-Ice system		-										
Noise level (at cooling)	High	dB(A)	41	55									
	Low	dB(A)	36	-									
	Soft	dB(A)	30	-									
	Quiet	dB(A)	21	-									

