





Prox sensor is ~80pF so bring it back below 50pF

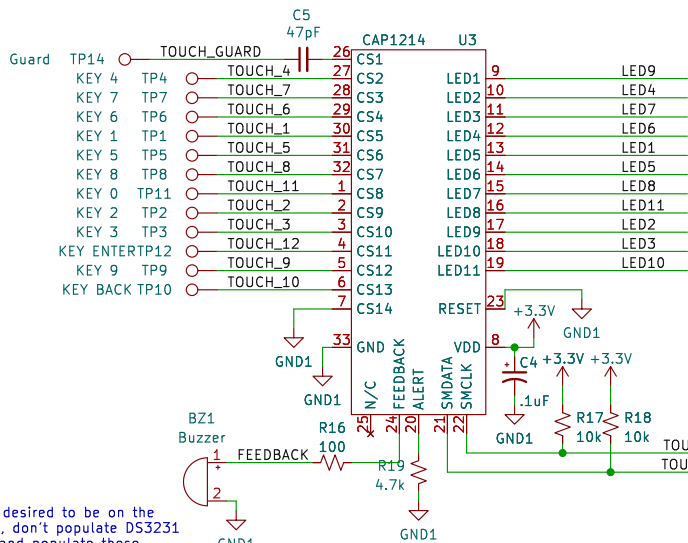

If MCP9808 is desired to be on the
ESP32 I2C bus, don't populate DS3231
or its pullups and populate these
with zero-ohm resistors.




Expansion I2C

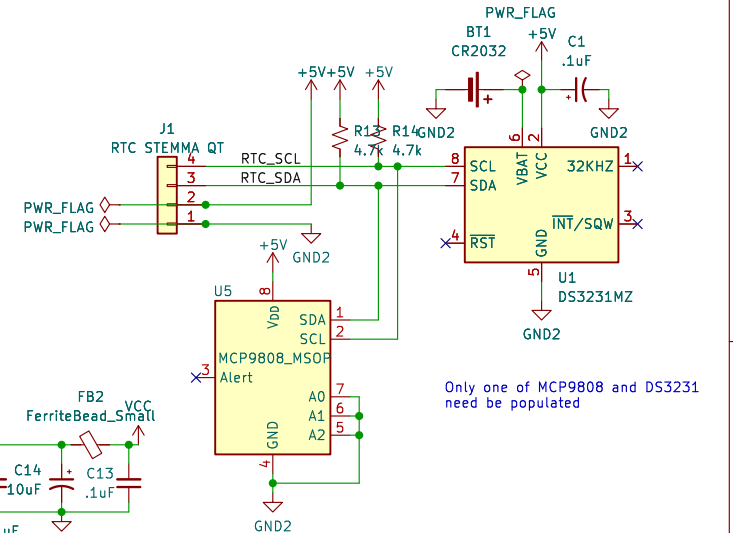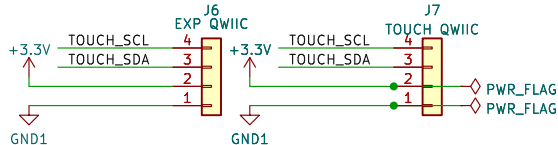

Only one of MCP9808 and DS3231
needs to be populated

C12/C19/C21/C23, C18/C20/C22/C24 are matching cap

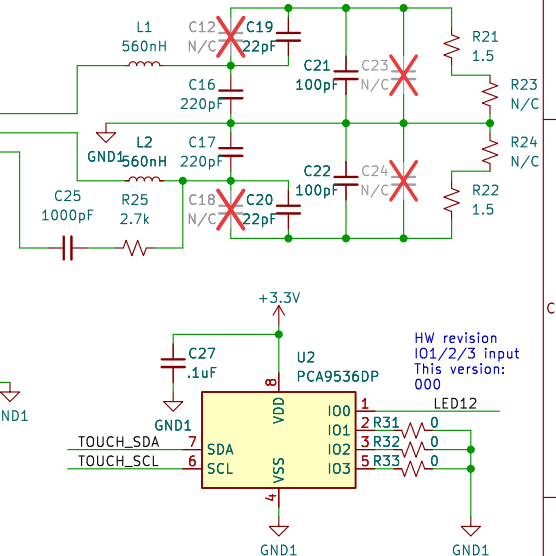

HW revision
I01/2/3 input
This version:
000



Design for OSHPark 4-Layer Service

Sheet: /
File: Keypad.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. kicad 7.0.10

Rev: 1
Id: 1/1