Version 2.10

UCSD CSE 30

Computer Organization and Systems Programming
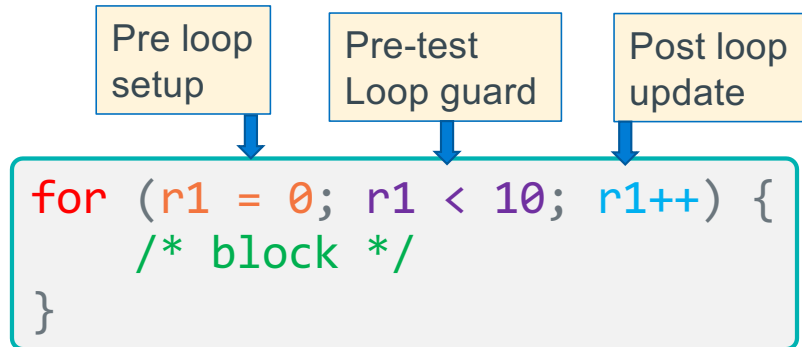
Lecture - 13

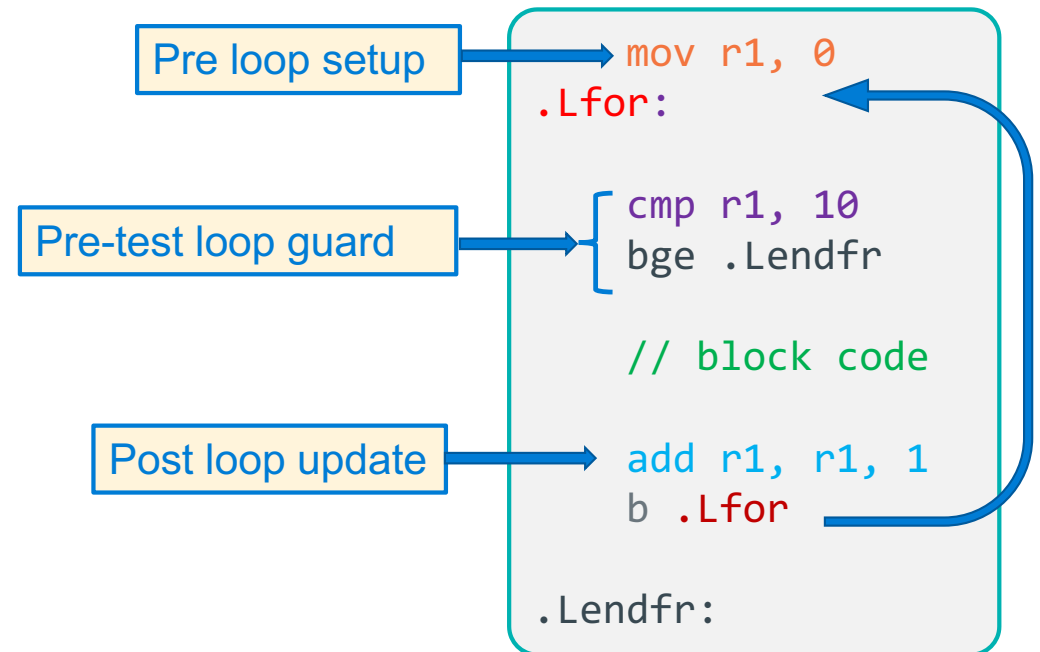CONTROL DATA

3600

Keith Muller

Program Flow – Counting (For) Loop Version 1

Pre loop setup

Pre-test Loop guard
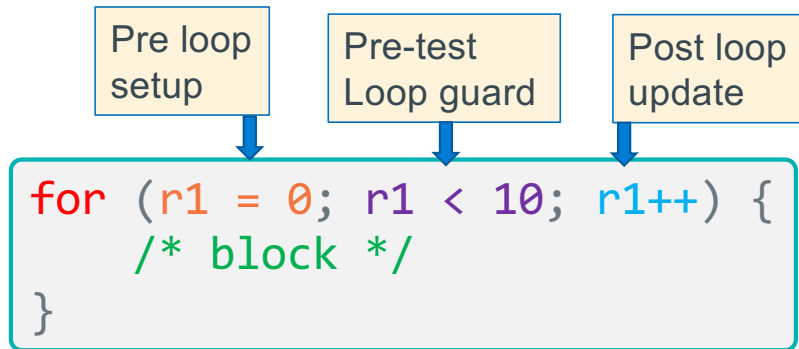
Post loop update

```
for (r1 = 0; r1 < 10; r1++) {
    /* block */
}
```
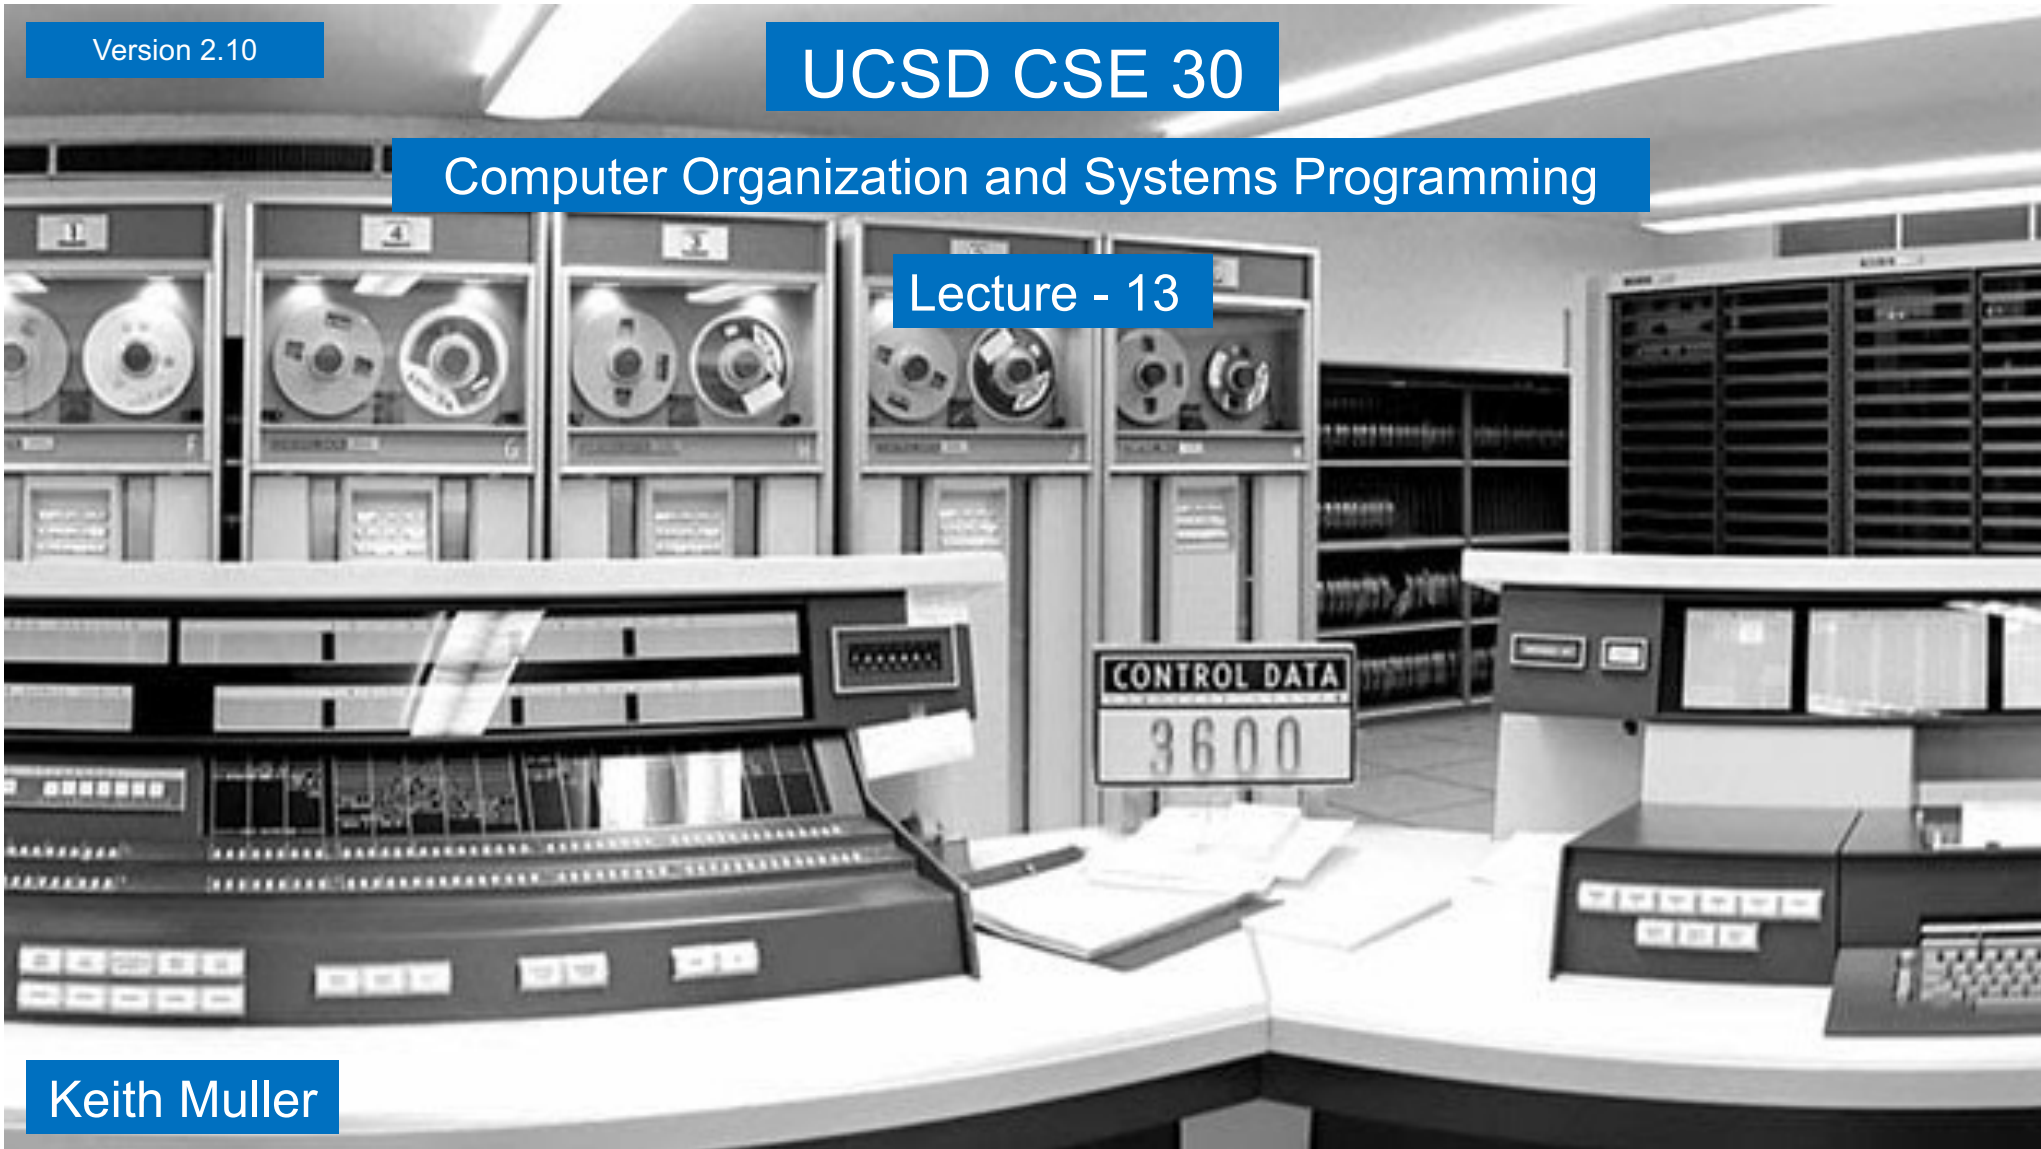
A **counting loop** has three parts:

1. Pre-loop setup
2. Pre-test loop guard conditions
3. Post-loop update

Pre loop setup

Pre-test loop guard

Post loop update

```
        mov r1, 0
.Lfor:

        cmp r1, 10
        bge .Lendfr

        // block code

        add r1, r1, 1
        b .Lfor

.Lendfr:
```

X

Program Flow – Counting (For) Loop – Version 2

Pre loop setup	Pre-test Loop guard	Post loop update

```c
for (r1 = 0; r1 < 10; r1++) {
    /* block */
}
```

- Alternative:
- move Pre-test loop guard before the loop
- Add post-test loop guard
  - *converts* to *do while*
  - **removes** an **unconditional branch**

Pre-loop setup → `mov r1, 0`

Pre-test loop guard →
```
cmp r1, 10
bge .Lendfr
```

```
.Ldo:

    // block code
```

Post loop update → `add r1, r1, 1`

Post-test loop guard →
```
cmp r1, 10
blt .Ldo
```

```
.Lendfr:
```
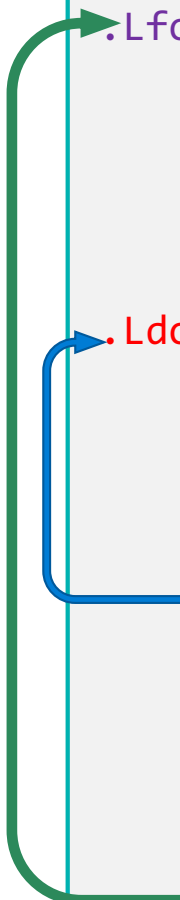
X
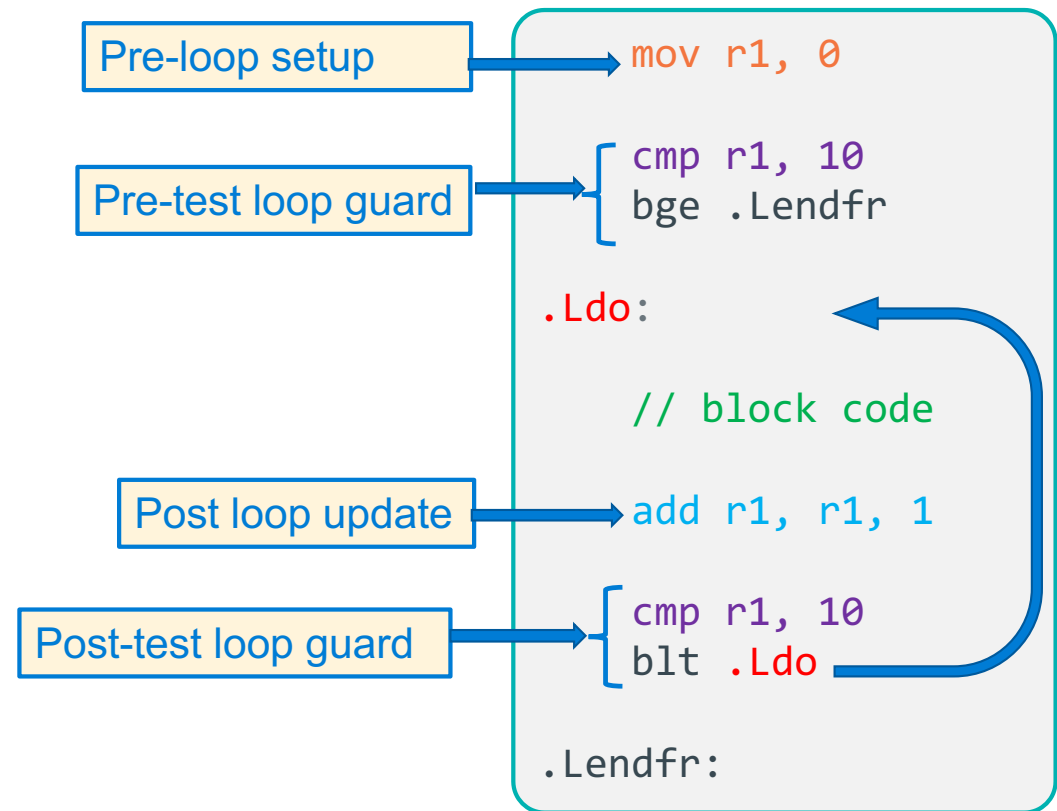
Nested loops

```
for (r3 = 0; r3 < 10; r3++) {
    r0 = 0;

    do {
        r0 = r0 + r1++;
    } while (r1 < 10);

    // fall through
    r2 = r2 + r1;

}
r5 = r0;
```

- Nest loop blocks as you would in C or Java

```
        mov r3, 0
.Lfor:
    cmp r3, 10       // loop guard
    bge .Lendfor

    mov r0, 0

.Ldo:
    add r0, r0, r1
    add r1, r1, 1

    cmp r1, 10    // loop guard
    blt .Ldo

    // fall through
    add r2, r2, r1

    add r3, r3, 1 // loop iteration
    b .Lfor
.Lendfor:
    mov r5, r0
```

X

Keep loops Properly Nested:
Do not branch into the middle of a loop

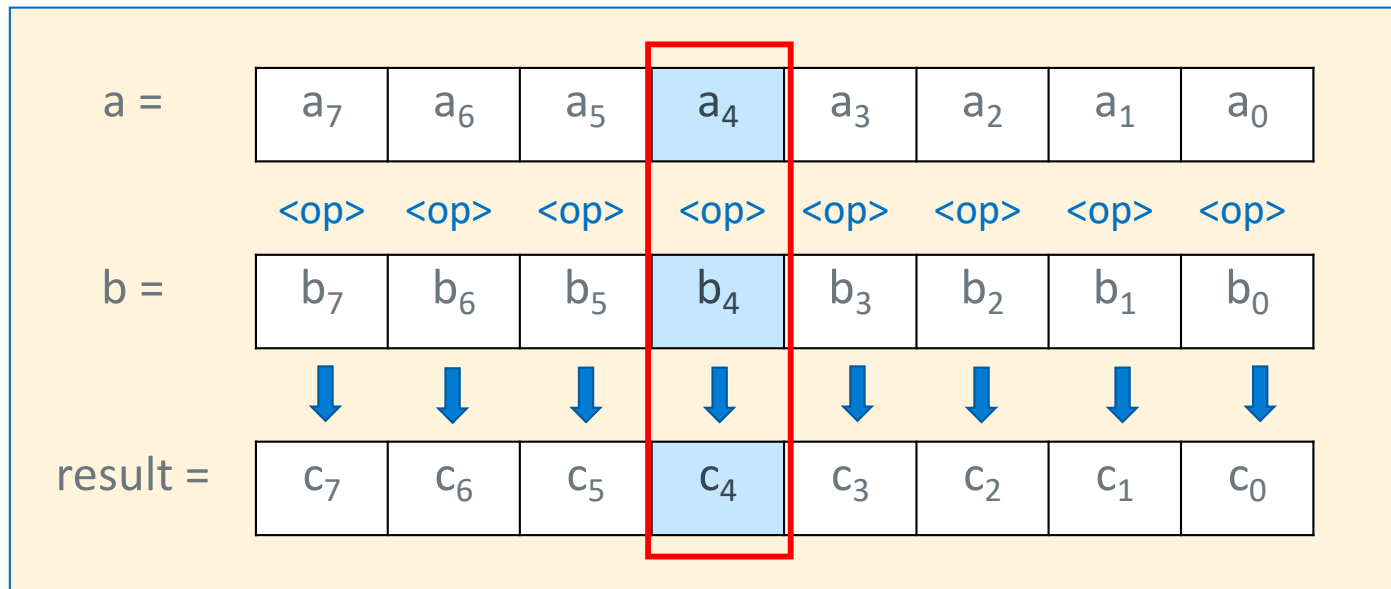- It is hard to understand and debug loops when you branch into the middle of a loop

- **Keep loops proper nested**

Bad practice: branch into loop body

Do not do the following:

```
.Lloop1:
    add r1, r1, 1
.Lloop2:
    add r2, r2, 1
    add r2, r1, r3
    cmp r1, 10
    blt .Lloop1
    beq .Lend1
    add r3, r3, 1
    cmp r2, 20
    ble .Lloop2
.Lend1:
```

X

What is a Bitwise Operation?

a =	a_7	a_6	a_5	a_4	a_3	a_2	a_1	a_0
	\<op\>	\<op\>	\<op\>	\<op\>	\<op\>	\<op\>	\<op\>	\<op\>
b =	b_7	b_6	b_5	b_4	b_3	b_2	b_1	b_0
	⬇	⬇	⬇	⬇	⬇	⬇	⬇	⬇
result =	c_7	c_6	c_5	c_4	c_3	c_2	c_1	c_0

- Bitwise operators are applied independently to each of the <u>corresponding</u> bit positions in each variable

- Each bit position of the result depends <u>only</u> on bits in the same bit position within the operands

x

Bitwise (Bit to Bit) Operators in C

`output = ~a;`

a	~a
0	1
1	0

`output = a & b;`

a	b	a & b
0	0	0
0	1	0
1	0	0
1	1	1

& with 1 to let a **bit through**
& with 0 to **set a bit to 0**

`output = a | b;`

a	b	a | b
0	0	0
0	1	1
1	0	1
1	1	1

| with 1 to **set a bit to 1**
| with 0 to let a **bit through**

`output = a ^ b;` `//EOR`

a	b	a ^ b
0	0	0
0	1	1
1	0	1
1	1	0

^ with 1 **will flip the bit**
^ with 0 to let a **bit through**

Bitwise
NOT

```
~ 1100
  ----
  0011
```

Bitwise
AND

```
  0110
& 1100
  ----
  0100
```

Bitwise
OR

```
  0110
| 1100
  ----
  1110
```

Bitwise
EOR

```
  0110
^ 1100
  ----
  1010
```

X

Bitwise Not (vs Boolean Not)

a	~a
0	1
1	0

Bitwise NOT

```
~ 1100
  ----
  0011
```

in C
int output = ~a;

	Bitwise Not
number	0101 1010 0101 1010 1111 0000 1001 0110
~number	1010 0101 1010 0101 0000 1111 0110 1001

Meaning	Operator	Operator	Meaning
Boolean NOT	!b	~b	Bitwise NOT

Boolean operators act on the entire value not the individual bits

Type	Operation	result
bitwise	~0x01	1111 1111 1111 1111 1111 1111 1111 1110
Boolean	!0x01	0000 0000 0000 0000 0000 0000 0000 0000

x

MVN (not)

```
mvn    r0, r1



// Copies all 32 bits
// of the value held
// in register r1 into
// the register r0
// then does a bitwise NOT
```

register r1

register r0

```
mvn    r0, 12



// Expands an imm8 value 0x0c
// stored in the instruction
// into a register then does
// a bitwise NOT
```

0x0c

register r0   0xffff fff3

Bitwise NOT

```
~ 1100
  ----
  0011
```

- A **bitwise NOT** operation

0x   0c
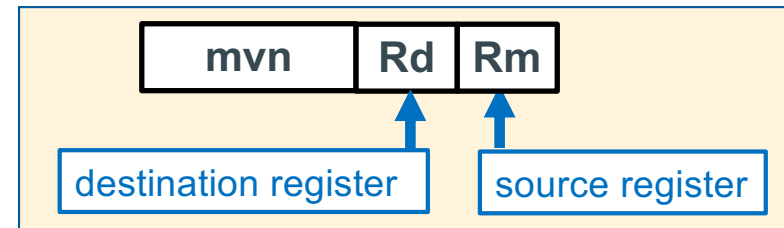
imm8 expansion

0x0000000c

bitwise not

0xfffffff3

x

mvn – Copies NOT (~)

| mvn | Rd | rot4 | imm8 |

destination register ↑   constant (immediate value) ↑
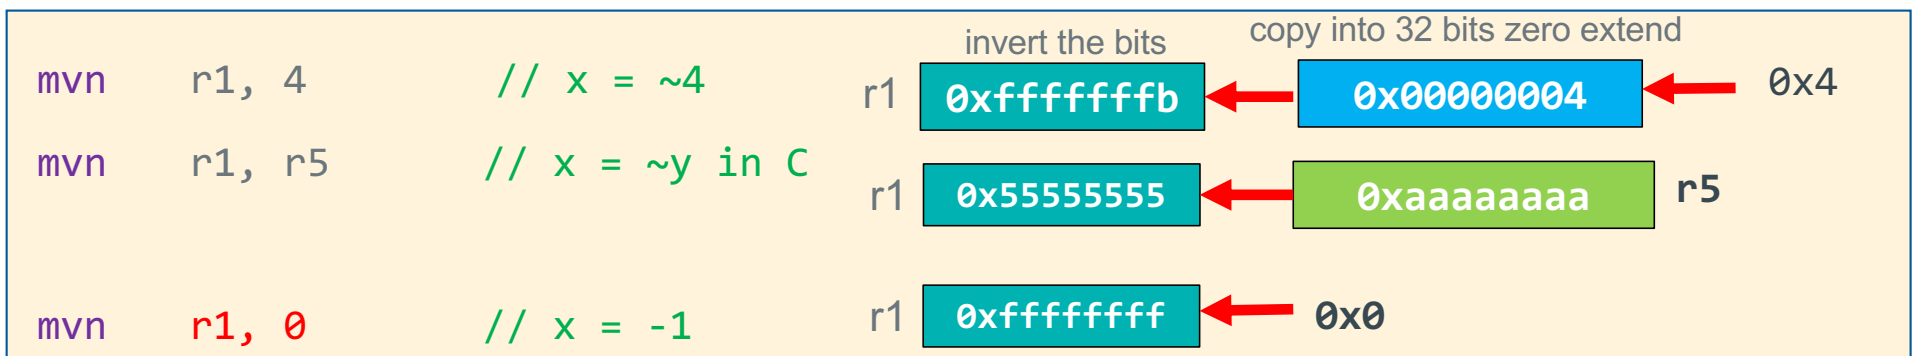
| mvn | Rd | Rm |

destination register ↑   source register ↑
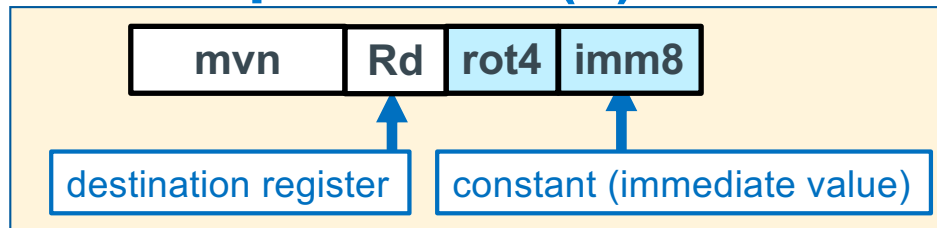
```
mvn  Rd, constant    // Rd = constant
mvn  Rd,  Rm         // Rd = Rm
```

```
~ 1100
  ----
  0011
```
Bitwise NOT
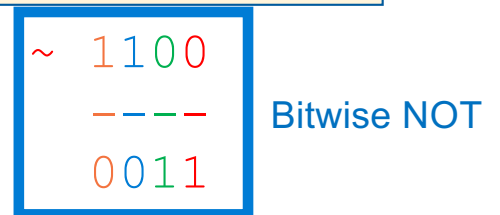
bitwise NOT operation. Immediate (constant) version copies to 32-bit register, then does a bitwise NOT

imm8	extended imm8	inverted imm8	signed base 10
0x00	0x00 00 00 00	0xff ff ff ff	-1
0xff	0x00 00 00 ff	0xff ff ff 00	-256

invert the bits   copy into 32 bits zero extend

```
mvn   r1, 4      // x = ~4
```
r1 0xfffffffb ← 0x00000004 ← 0x4

```
mvn   r1, r5     // x = ~y in C
```
r1 0x55555555 ← 0xaaaaaaaa   r5

```
mvn   r1, 0      // x = -1
```
r1 0xffffffff ← 0x0

x

Bitwise Instructions

<op>	Rd	Rn	rot4	imm8

- destination → Rd
- operand 1 → Rn
- Operand 2 constant → imm8

<op>	Rd	Rn	Rm

- destination → Rd
- operand 1 → Rn
- Operand 2 → Rm
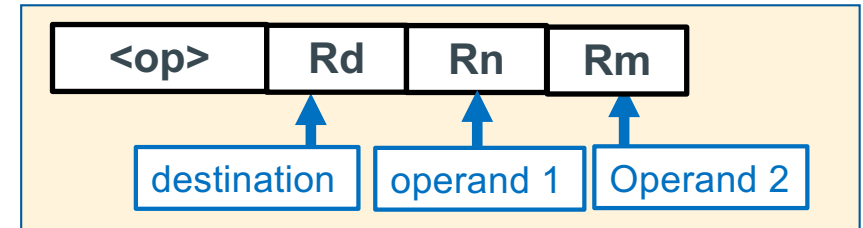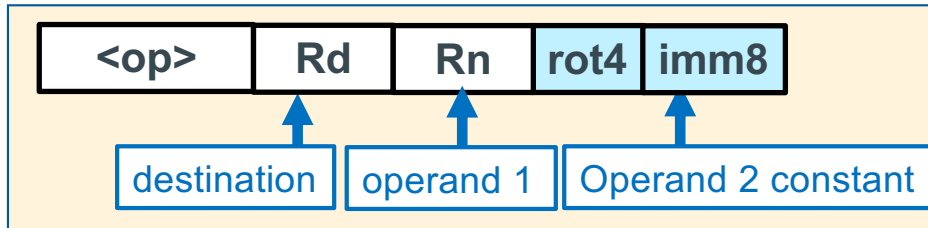
```
<op>  Rd,  Rn, constant    // Rd = Rn <op> constant
<op>  Rd,  Rn,  Rm         // Rd = Rn <op> Rm
```

Bytes: $0 <= imm8 <= 255$ + values from "rotating" rot 4 bits

Bitwise <op> description	C Syntax	Arm <op> Syntax Op2: either register or constant value	Operation
Bitwise **AND**	a & b	and R_d, R_n, Op2	$R_d = R_n$ & Op2
Bitwise **OR**	a | b	orr R_d, R_n, Op2	$R_d = R_n$ | Op2
Exclusive **OR**	a ^ b	eor R_d, R_n, Op2	$R_d = R_n$ ^ Op2
Bitwise **NOT**	a = ~b	mvn R_d, R_n	$R_d = \sim R_n$

X

Bitwise versus C Boolean Operators

Boolean Operators

Bitwise Operators

Meaning	Operator		Operator	Meaning
Boolean AND	a && b		a & b	Bitwise AND
Boolean OR	a || b		a | b	Bitwise OR
Boolean NOT	!b		~b	Bitwise NOT

Boolean operators **act on the entire value not the individual bits**

bitwise &   versus   Boolean &&

        0x10 &   0x01 = 0x00 (bitwise)

        0x10 &&   0x01 = 0x01 (Boolean)

bitwise ~   versus   Boolean !

        ~0x01 = 0xfffffffe (bitwise)

        !0x01 = 0x0 (Boolean)

        !0xff = 0x0 (Boolean)

X

The act (operation) of *Masking*

a =	a_7	a_6	a_5	a_4	a_3	a_2	a_1	a_0
	<op>	<op>	<op>	<op>	<op>	<op>	<op>	<op>
b =	b_7	b_6	b_5	b_4	b_3	b_2	b_1	b_0
result =	c_7	c_6	c_5	c_4	c_3	c_2	c_1	c_0

- Bit masks access/modify specific bits in memory

- Masking act of applying a mask to a value with a specific op:

- orr: 0 passes bit unchanged, 1 sets bit to 1   `(a = b | c; // in C)`

- eor: 0 passes bit unchanged, 1 inverts the bit `(a = b ^ c; // in C)`

- and: 0 clears the bit, 1 passes bit unchanged `(a = b & c; // in C)`

14

X

Mask on

force bits to 1 "**mask on**" operation
- 1 to **set a bit to 1**
- 0 to let a **bit through unchanged**

```
orr  r1, r2, r3

r1 = r2 | r3; // in C
```

Example: force lower 16 bits to 1

```
DATA: r2 0xab ab ab 77

orr

MASK: r3 0x00 00 ff ff
```
  unchanged   forces to a 1
```
RSLT: r1 0xab ab ff ff
```

Example: force lower 8 bits to 1

```
DATA: r2 0xab ab ab 77

orr    r1   r2, 0xff

r1 = r2 | 0xff; // in C

RSLT: r1 0xab ab ab ff
```

X

Mask off

force bits to 0 "**mask off**" operation
- 0 to **set a bit to 0**   ("clears the bit")
- 1 to let a **bit through unchanged**

```
and   r1, r2, r3

r1 = r2 & r3; // in C
```

Example: force lower 8 bits to 0

```
DATA: r2 0xab ab ab 77

and

MASK: r3 0xff ff ff 00
```

  unchanged   forces to a 0

```
RSLT: r1 0xab ab ab 00
```

Example: force lower 8 bits to 0

```
DATA: r2 0xab ab ab 77

and r1  r2, 0xffffff00

r1 = r2 & 0xffffff00; // in C

RSLT: r1 0xab ab ab 00
```

X

Extracting (Isolate) a Field of Bits with a mask

extract top 8 bits of r2 into r1
- 0 to **set a bit to 0**   ("clears the bit")
- 1 to let a **bit through unchanged**

        and r1, r2, r3

```
DATA:  r2 0xab ab ab 77

and

MASK:  r3 0xff 00 00 00

   unchanged              forces to a 0

RSLT:  r1 0xab 00 00 00
```

extract top 8 bits of r2 into r1

DATA: r2 0xab ab ab 77

and r1, r2, 0xff000000

RSLT: r1 0xab 00 00 00

r1 = r2 & 0xff000000; // in C

X

Finding if a bit is set

query the status of a bit **"bit status"** operation
- 0 to **set a bit to 0**   ("clears the bit")
- 1 to let a **bit through unchanged**

```
    and  r1, r2, 0x02

    cmp r1, 0

    beq .Lendif

    // code for is set

.Lendif:
```

```
Example is bit 1 set

DATA: r2 0xab ab ab 77

and

MASK:      0x00 00 00 02   is bit 1 set?

forces to a 0              unchanged

RSLT: r1 0x00 00 00 02   != 0 if set
```

```
    unsigned int r1, r2;
    // code
    r1 = r2 & 0x02
    if  (r1 != 0) {
        // code for is set
    }
```

```
    unsigned int r2;
    // code
    if ((r2 & 0x02) != 0) {
        // code for is set
    }
```

X

Even/Odd

Even or odd, check LSB (same as mod %2)

```
check LSB (bit 0) if set then odd, else even

        and   r1, r2, 0x01

        cmp   r1, 0x01

        bne  .Lendif

        // code for handling odd numbers

.Lendif:
```

```
    unsigned int r2;
    // code
    if ((r2 & 0x01) != 0) {
        // code for handling odd numbers
    }
```

```
DATA: r2 0xab ab ab 77

and

MASK: r3 0x00 00 00 01  (mod 2 even or odd)

forces to a 0                    unchanged

RSLT: r1 0x00 00 00 01  (odd)
```

X

MOD %<power of 2>

remainder (mod): num % d where num ≥ 0 and d = 2^k

```
mask = 2^k -1 so for mod 16, mask = 16 -1 = 15
```

and   r1, r2, r3

```
Example: %2

DATA: r2 0xab ab ab 77

and

MASK: r3 0x00 00 00 01  (mod 2 even or odd)

  forces to a 0                unchanged

RSLT: r1 0x00 00 00 01  (odd)
```

```
Example: Mod 16

DATA: r2 0xab ab ab 77

and

MASK: r3 0x00 00 00 0f  (mod 16)

  forces to a 0                unchanged

RSLT: r1 0x00 00 00 07
```

X

Flipping bits: bit toggle
Used in PA7/PA8

invert (*flip*) bits **"bit toggle"** operation

- 1 **will flip the bit**
- 0 to let a **bit through**

```
    eor   r1, r2, r3
```

- Observation: When applied twice, it returns the original value (symmetric encoding)
- With a mask of all 1's is a 1's compliment

Example: *flip* the lower 8-bits
```
    eor   r1, r2, 0xff
```

```
unsigned int r1, r2;

r1 = r2 ^ 0xff;
```

Example: invert (*flip*) the lower 8-bits

DATA: r2 0xab ab ab 77   77: 0111 0111

eor

MASK: r3 0x00 00 00 ff

unchanged   inverts (flips)

RSLT: r1 0xab ab ab 88   88: 1000 1000

DATA: r1 0xab ab ab 88

eor

MASK: r3 0x00 00 00 ff apply a 2nd time

inverts (flips)

RSLT: r1 0xab ab ab 77 original value!

X

Unsigned Integers (positive numbers) with Fixed # of Bits

- 4 bits is 2^4 = ONLY 16 distinct values

- **Mod**ular (C operator: %) or clock math
  - Numbers start at 0 and "wrap around" after 15 and go back to 0

- Keep adding 1

  wraps (clockwise)

  0000 -> 0001 … -> 1111 -> 0000

- Keep subtracting 1

  wraps (counter-clockwise)

  1111 -> 1110 … -> 0000 -> 1111

- Addition and subtraction use normal "carry" and "borrow" rules, just operate in binary

4 bits

Numbers get bigger in this direction

22

x
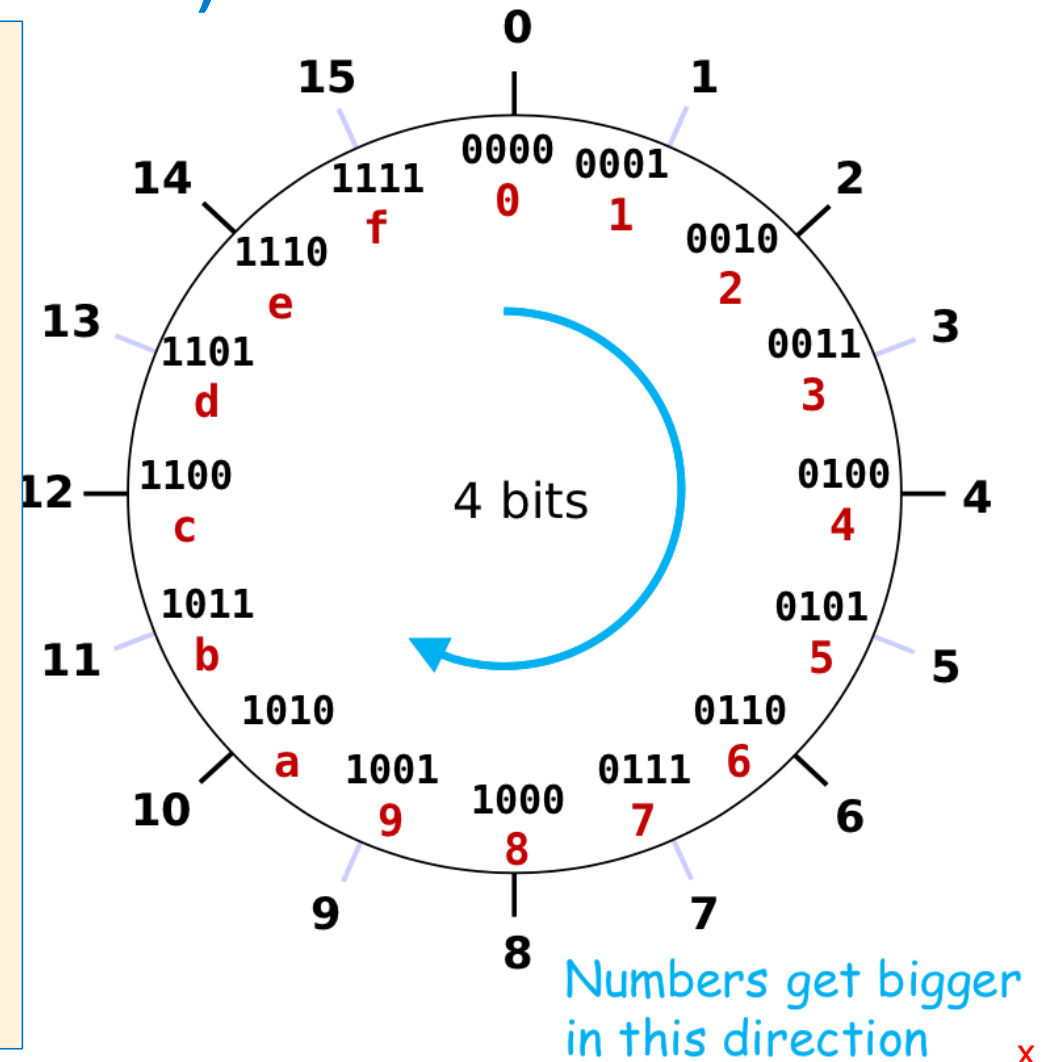
Problem: How to Encode <u>Both</u> Positive <u>and</u> Negative Integers

- How do we represent the negative numbers within a fixed number of bits?
  - Allocate some bit patterns to negative and others to positive numbers (and zero)
- 2^n distinct bit patterns to encode positive and negative values
- **Unsigned values:** $\qquad 0 \ldots 2^n-1$ ← -1 comes from counting 0 as a "positive" number
- **Signed values:** $\qquad -2^{n-1} \ldots 2^{n-1}-1$ (dividing the range in ~ half including 0)
- **On a number line (below):** 8-bit integers – signed and unsigned (*e.g.,* `char in C`)
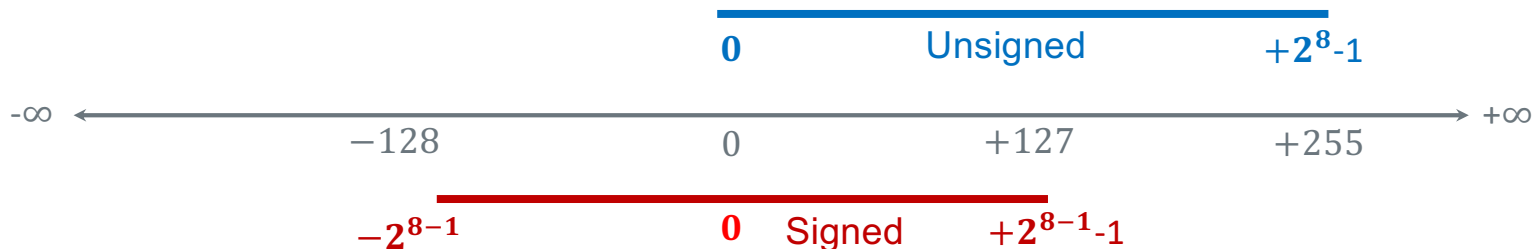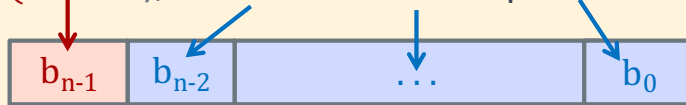

Same "width" (same number of encodings), just shifted in value

Two's Complement: The MSB Has a *Negative Weight*

$$2's\ Comp = -b_{n-1}2^{n-1} + b_{n-2}2^{n-2} + \dots + b_1 2^1 + b_0 2^0$$

b_{n-1} weight is (-2^{n-1}), all other bits: have positive weights $(+2^i)$

b_{n-1}	b_{n-2}	...	b_0

- 4-bit (w = 4) weight $= -2^{4-1} = -2^3 = -8$
  - 1010_2 **unsigned**:
    $1\times2^3 + 0\times2^2 + 1\times2^1 + 0\times2^0 = \mathbf{10}$
  - 1010_2 **two's complement**:
    $-1\times2^3 + 0\times2^2 + 1\times2^1 + 0\times2^0 = -8 + 2 = \mathbf{-6}$
  - -8 in **two's complement**:
    $1000_2 = -2^3 + 0 = -8$
  - -1 in **two's complement**:
    $1111_2 = -2^3 + (2^3 - 1) = -8 + 7 = \mathbf{-1}$

4 bits

Numbers get bigger in this direction

24

X
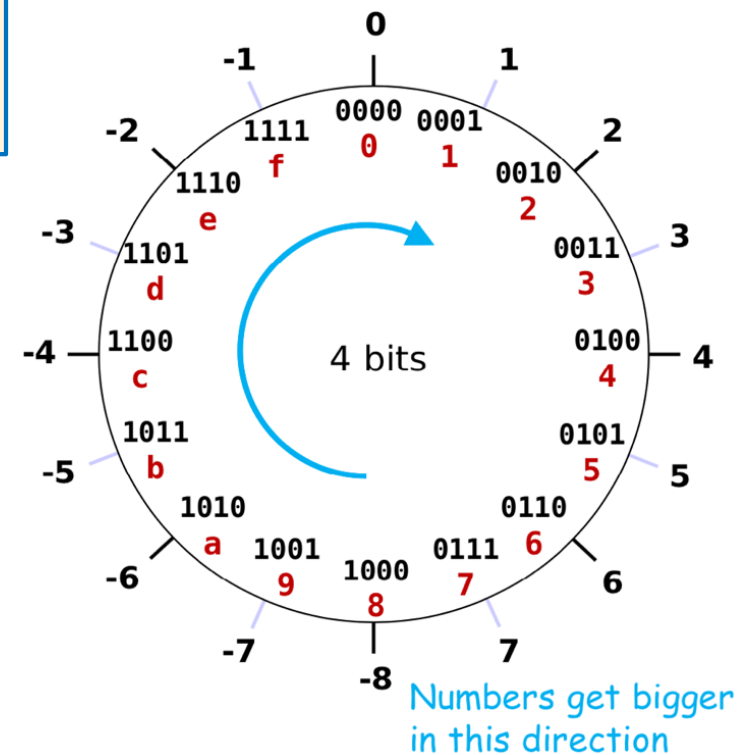
2's Complement Signed Integer Method

- Positive numbers encoded same as unsigned numbers
- All negative values have a one in the leftmost bit
- All positive values have a zero in the leftmost bit
  - This implies that 0 is a positive value
- Only one zero
- **For n bits, Number range is** $-(2^{n-1})$ **to** $+(2^{n-1} - 1)$
  - Negative values "go 1 further" than the positive values
- Example: the range for 8 bits:
     -128, -127, .. 0, .. 126, **+127**
- Example the range for 32 bits:
     -2147483648 .. 0, .. **+2147483647**
- *Arithmetic is the same as with unsigned binary!*

4 bits

Numbers get bigger in this direction

x
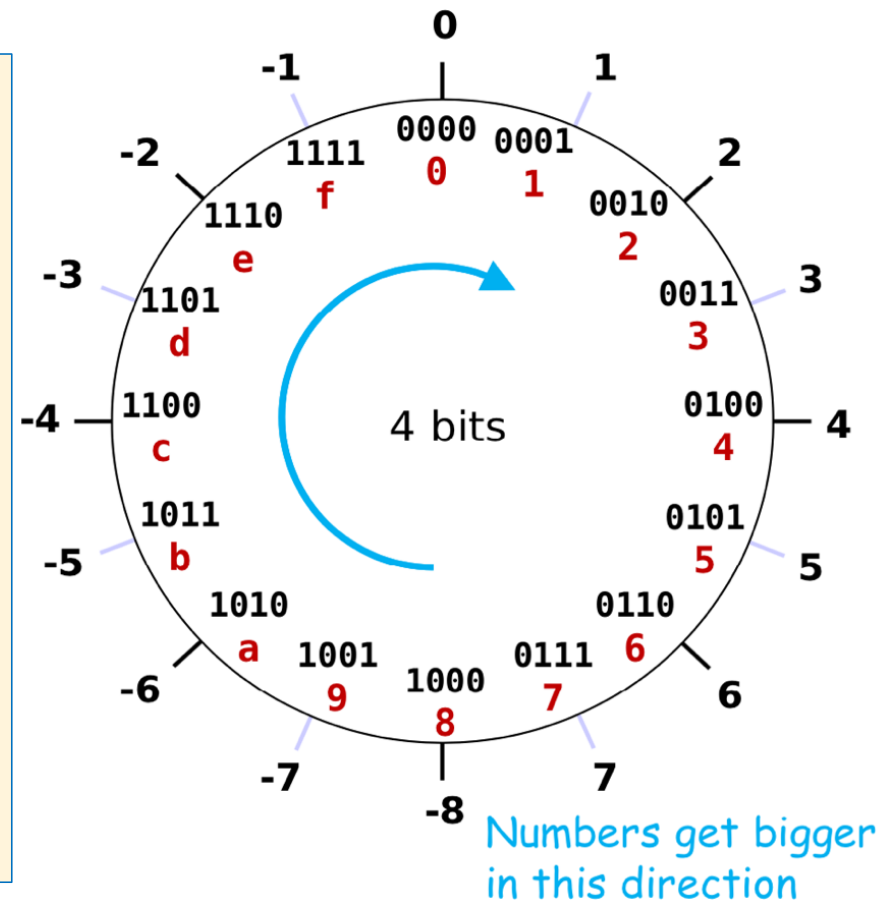
Sign Extension (how type promotion works)

- Sometimes you need to work with integers encoded with different number of bits

   **8 bits (char)** -> (16 bits) **short** -> (32 bits) **int**

- **Sign extension increases the number of bits: n-bit** wide signed integer X, ***EXPANDS*** to a ***wider*** n−bit + k-bit signed integer X′ where *both have the same value*

Unsigned

- Just add leading zeroes to the left side

Two's Complement Signed:

- If positive, add leading zeroes on the left
  - Observe: Positive stay positive

- If negative, add leading ones on the left
  - Observe: Negative stays negative
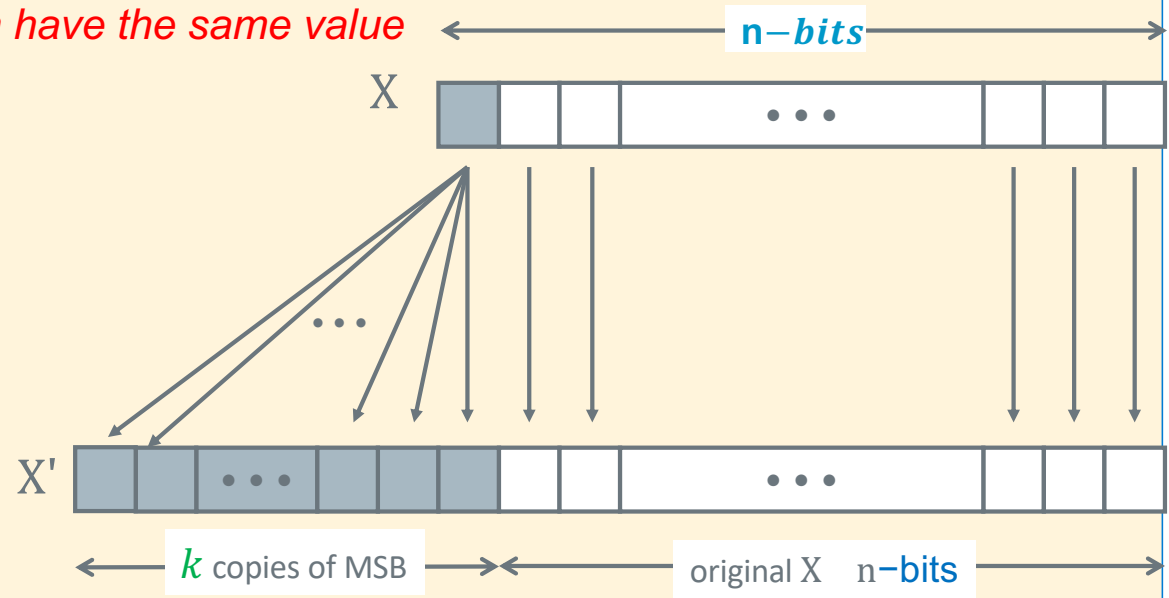
Example: Two's Complement Sign or bit Extension - 1

- Adding 0's in front of a positive numbers does not change its value

```
      7    =     0111
extend to
8 bits
          00000111
Number is still 7
```

```
      1    =     0001
extend to
8 bits
          00000001
Number is still 1
```

x

Example: Two's Complement Sign or bit Extension -2

- Adding 1's if front of a negative number does not change its value

```
  7 = 0111
        ↓↓↓↓
invert = 1000
add 1  +    1
     -7   1001
```

```
  -7     =     1001
extend to
8 bits
            11111001
```

```
1001 = -8 + 1 = -7
11111001 =
(-128 + 64 + 32 + 16 + 8) + 1
= -8 + 1 = -7
```

```
  7 = 00000111
        ↓↓↓↓↓↓↓↓
invert = 11111000
add 1  +        1
     -7   11111001
```

28

X

Sign Extension in C: Type casts

- Convert from smaller to larger integral data types

- C and Java automatically performs sign extension

- Example (on pi-cluster with 32-bit int)

```c
#include <stdlib.h>
#include <stdio.h>
int main(void)
{
    signed char c = -1;
    signed int i = c;
    unsigned char d = 1;
    unsigned int j = d;
    printf("c decimal = %hd\n", c);
    printf("c = 0x%hhx\n", c);
    printf("i decimal = %d\n", i);
    printf("i = 0x%x\n", i);
    printf("\nd decimal = %hd\n", d);
    printf("d = 0x%hhx\n", d);
    printf("j decimal = %d\n", j);
    printf("j = 0x%x\n", j);
    return EXIT_SUCCESS;
}
```

```
%./a.out
c decimal = -1
c = 0xff
i decimal = -1
i = 0xffffffff

d decimal = 1
d = 0x1
j decimal = 1
j = 0x1
```

X

Different Type of Numbers each have a Fixed # of Bits
Spanning one or more contiguous bytes of memory

C Data Type	AArch-32 contiguous Bytes
char (arm unsigned)	1
short int	2
unsigned short int	2
int	4
unsigned int	4
long int	4
long long int	8
float	4
double	8
long double	8
pointer *	4

Byte 8-bit integer uses 1 byte

00000000

7   0

Half Word 16-bit integer uses 2 bytes

000000001	00000000

15   7   0
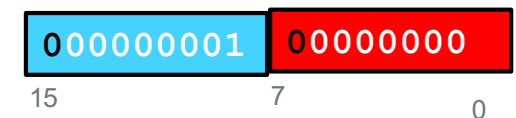
most significant bit (largest power of 2)

least significant byte

Word 32-bit integer uses 4 bytes

00000011	00000010	00000001	00000000

31   0

most significant byte
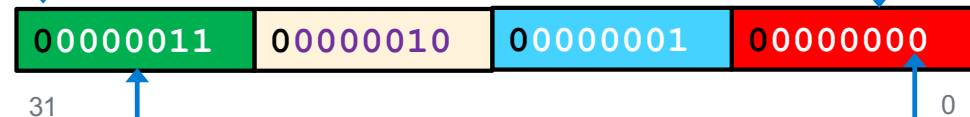
least significant bit (smallest power of 2)

X

Byte Ordering of Numbers In Memory: Endianness

- Two different ways to place multi-byte integers in a byte addressable memory
- Big-endian: Most Significant Byte ("big end") starts at the *lowest (starting)* address
- Little-endian: Least Significant Byte ("little end") starts at the *lowest (starting)* address

- Example: 32-bit integer with 4-byte data

a1	b2	c3	d4

MSB
Most significant byte

LSB
Least significant byte

Little-Endian

a1	0x103
b2	0x102
c3	0x101
d4	0x100

Big-Endian

d4	0x103
c3	0x102
b2	0x101
a1	0x100

X
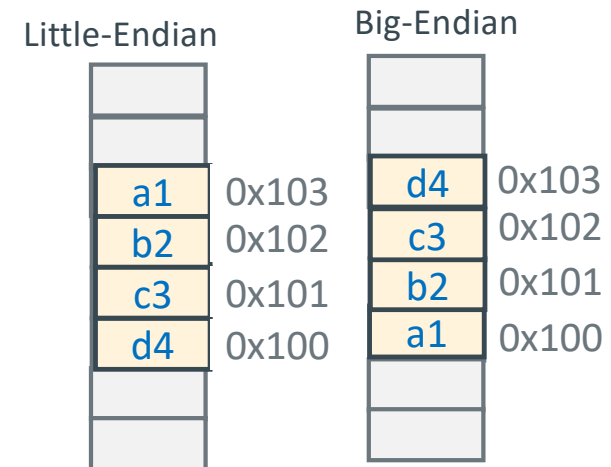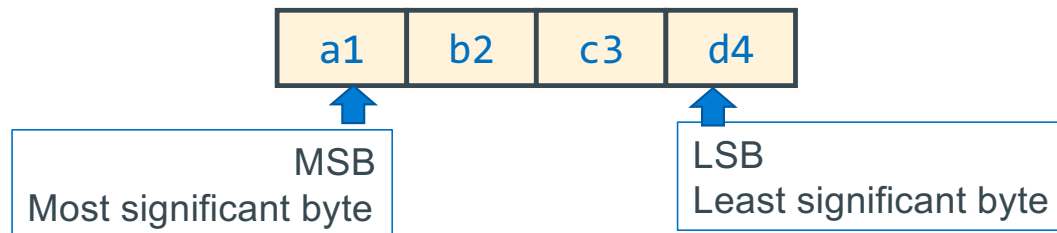
Byte Ordering Example

```
Decimal:   12345
Binary:     0011  0000  0011  1001
Hex:          3     0     3     9
```

```
int x = 12345;
// or x = 0x00003039;  // show all 32 bits
```

IA32, ARM32

(big-endian)   (little-endian)

0x03	39
0x02	30
0x01	00
0x00	00

00	0x03
00	0x02
30	0x01
39	0x00

x
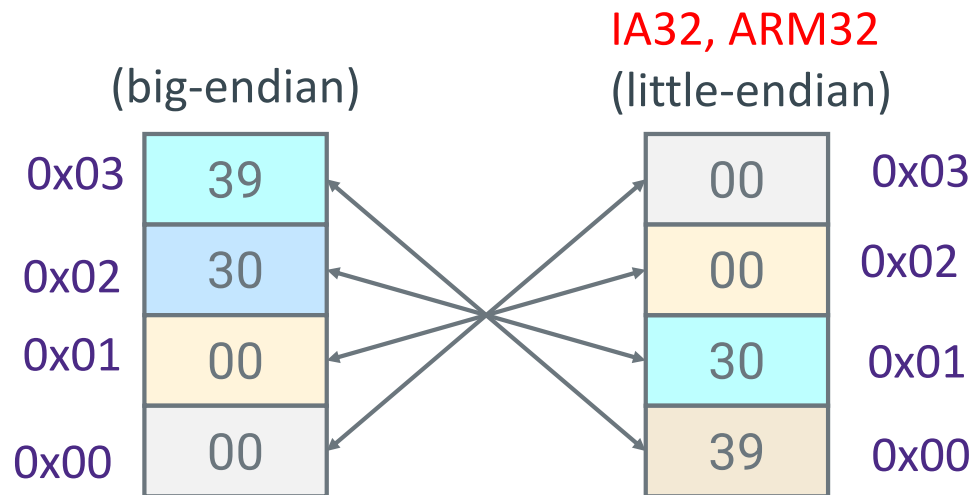
Using pointers to examine byte order (on pi-cluster)

Little-Endian

a1	0x103
b2	0x102
c3	0x101
d4	0x100

a1	b2	c3	d4

MSB
Most significant byte

LSB
Least significant byte
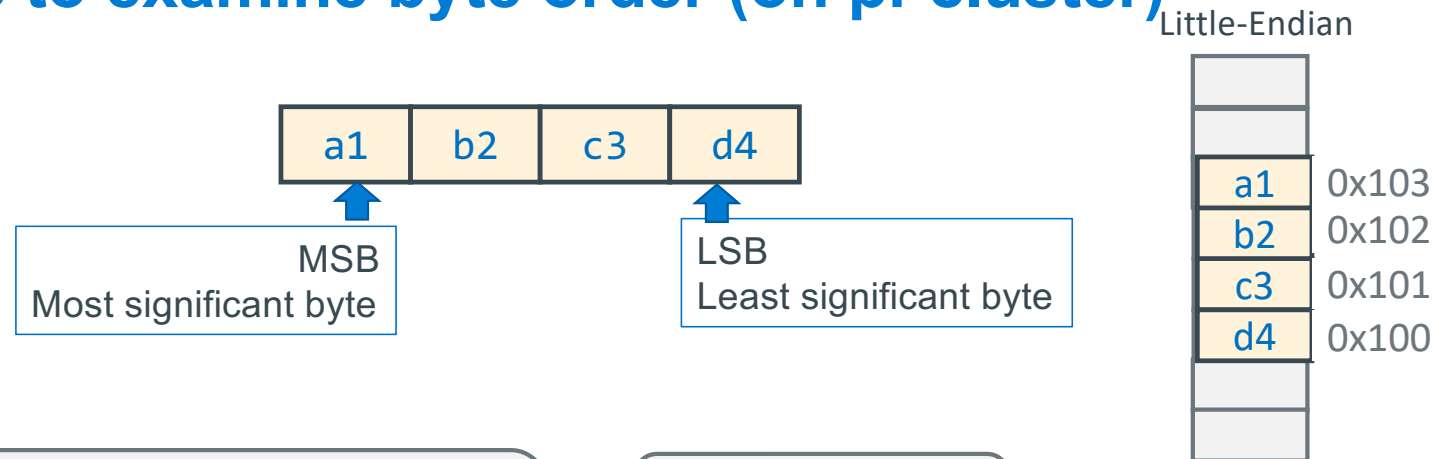
```c
#include <stdio.h>
#include <stdlib.h>
#define SZ 2
int main()
{
    unsigned int foo[SZ] = {0x11223344, 0xaabbccdd};
    unsigned char *chptr = (unsigned char *)foo;

    // print from MSB to LSB – high to low memory)
    for (int i = sizeof(foo)-1; i >= 0; i--)
        printf("byte %d: %x\n", i, *(chptr + i));

    return EXIT_SUCCESS;
}
```

```
$ ./a.out
byte 7: aa
byte 6: bb
byte 5: cc
byte 4: dd
byte 3: 11
byte 2: 22
byte 1: 33
byte 0: 44
```

0xaa	0x12345687
0xbb	0x12345686
0xcc	0x12345685
0xdd	0x12345684
0x11	0x12345683
0x22	0x12345682
0x33	0x12345681
0x44	0x12345680

X

Byte Addressable Memory Shown as 32-bit words

1 byte Memory Content
One byte per row

Byte Memory Address

	Byte Address
0x07	0x12345687
0x06	0x12345686
0x05	0x12345685
0x04	0x12345684 ← Word Aligned address
0x03	0x12345683
0x02	0x12345682
0x01	0x12345681 ← Word Aligned address
0x00	0x12345680 ← address
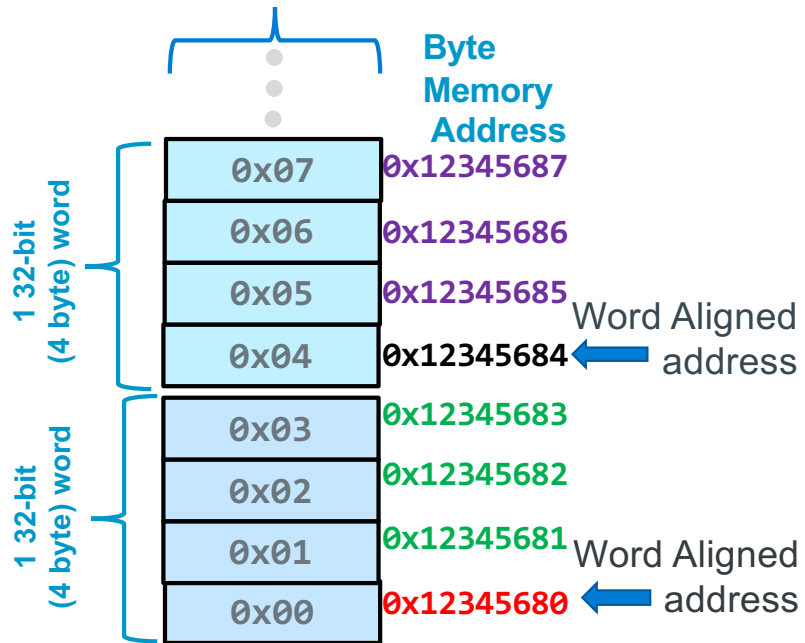
1 32-bit (4 byte) word

Contents of Memory
One 32-bit (4 byte) word per row

Word Memory Address

MSByte			LSByte	
				0x1234568c
				0x12345688
0x07	0x06	0x05	0x04	0x12345684
0x03	0x02	0x01	0x00	0x12345680
0x12345683	0x12345682	0x12345681	0x12345680	
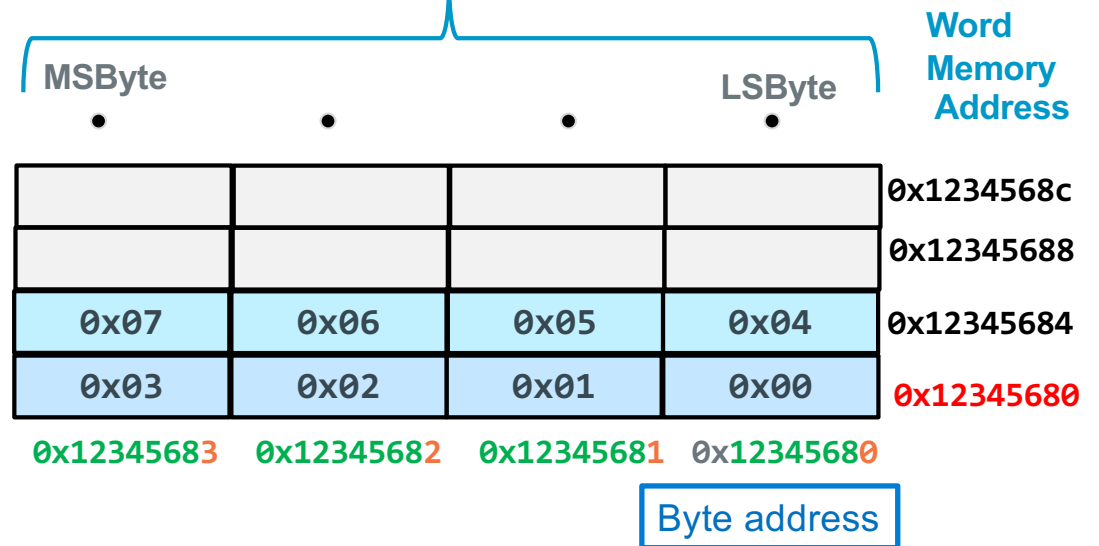
Byte address

Observation
32-bit aligned addresses
rightmost 2 bits of the address are always 0

34

X

Bit Shifting ARM and C Equivalents

`<inst>`	Rd	Rm	const5

- destination ← Rd
- operand 1 ← Rm
- operand 2 constant ← const5

Number of bit to shift or rotate: const 5 bits

`<inst>`	Rd	Rm	Rs

- destination ← Rd
- operand 1 ← Rm
- operand 2 ← Rs

Number of bit to shift or rotate: Rs
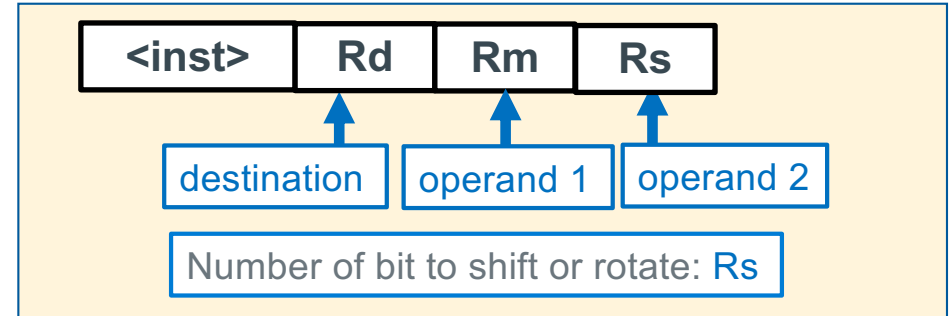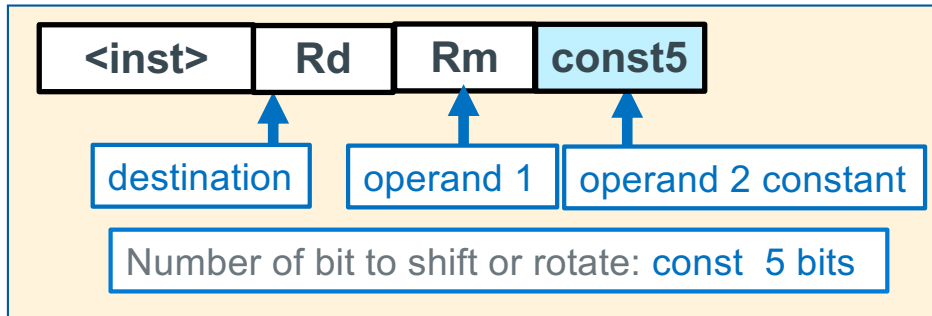
Instruction	ARM	C	Diagram
Logical Shift Left 0 fills on right 0 <= n <= 32 bits	lsl R_d, R_m, n lsl R_d, R_m, R_s	int x; or unsigned int x x << n;	
Logical Shift Right 0 fills on left 0 <= n <= 32 bits	lsr R_d, R_m, n lsr R_d, R_m, R_s	unsigned int x; x >> n;	
Arithmetic Shift Right Sign extends on left 0 <= n <= 32 bits	asr R_d, R_m, n asr R_d, R_m, R_s	int x; x >> n;	
Rotate Right 0 <= n <= 32 bits	ror R_d, R_m, n ror R_d, R_m, R_s	ror n in a 32-bit registers unsigned int x; x = (x >> n) | (x << (32 - n));	

X

Shift Operations in C

- n is number of bits to shift a variable x of width w bits

- Shifts by `n < 0` or `n ≥ w` are *undefined*

- Left shift (`x << N`) – **Multiplies by 2^N**
  - Shift N bits left, Fill with `0`s on right

- **In C:** behavior of `>>` is determined by compiler
  - gcc: it depends on data type of `x` (signed/unsigned)

- Right shift (`x >> N`) - **Divides by 2^N**

  - Logical shift (for unsigned variables)
    - Shift N bits right, Fill with 0s on left

  - Arithmetic shift (for signed variables) – Sign Extension
    - Shift N bits right while **<u>Replicating</u>** the most significant bit on left
    - Maintains sign of `x`

- **In Java:** logical shift is **>>>** and arithmetic shift is >>

X

Left Shift

Right logical Shift

Right Arithmetic Shift

Arithmetic Shift Right Example: Testing Sign

```
asr r2, r0, 31

r0 0xab ab ab 77  // bit 31 is a one
r2 0xff ff ff ff // see the sign extend
```
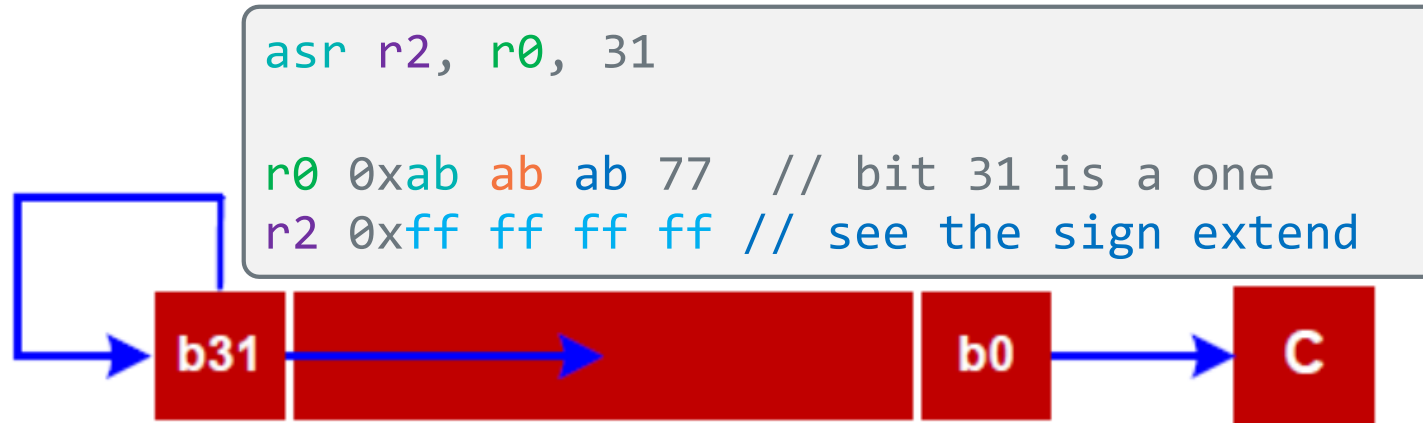

Test for sign
-1 if r0 negative

```
int i;
//code
if ((i>>31) == -1) {
  // code neg #
}
```

```
    asr r2, r0, 31
    cmp r2, -1
    bne .Lendif
    //code neg #
.Lendif:
```

X

Arithmetic Shift Right Example: Testing SIgn

```
asr r2, r0, 31

r0 0x7b ab ab 77  // bit 31 is a zero
r2 0x00 00 00 00 // see the sign extend
```
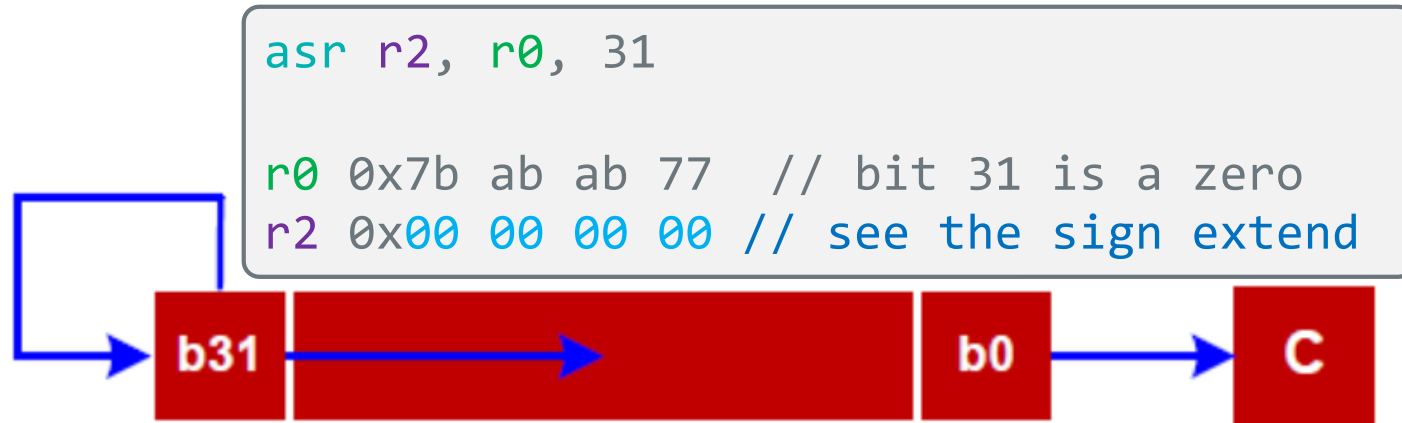

Test for sign
0 if r0 positive

```
int i;
//code
if ((i>>31) == 0) {
  // code pos #
}
```

```
asr r2, r0, 31
cmp r2, 0
bne .Lendif
  //code positive #
.Lendif:
```

X

Logical Shift & Rotate Operations


```
lsr r2, r0, 8

r0 0xab ab ab 77
r2 0x00 ab ab ab
```

```
lsl r2, r0, 8

r0 0xab ab ab 77
r2 0xab ab 77 00
```

```
ror r2, r0, 8

r0 0xab ab ab 77
r2 0x77 ab ab ab
```

X

Extracting/Isolating Unsigned Bitfields

- Move byte 2 in r0 to byte 0 in r1
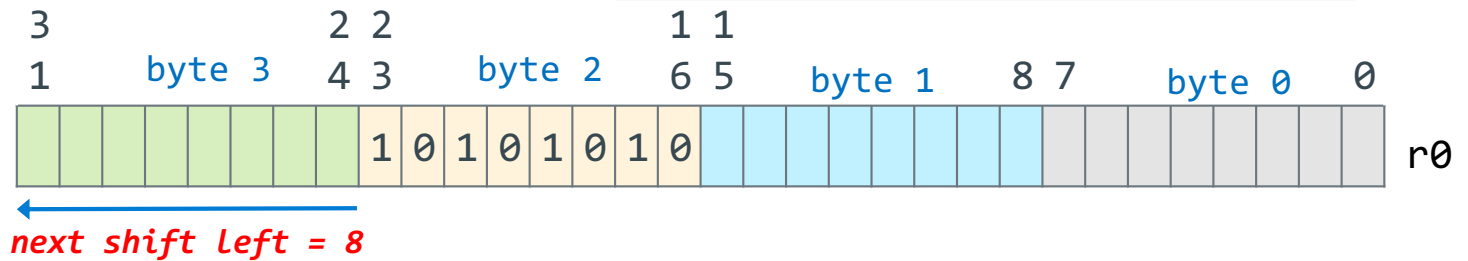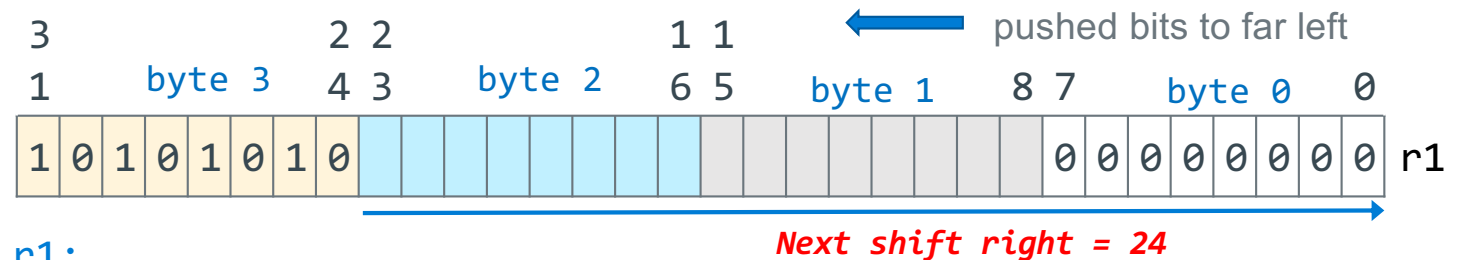

```
lsl  r1, r0, 8

unsigned int r0,r1;
r1 = r0 << 8;

lsr  r1, r1, 24
r1 = r1 >> 24;
```

r0 bits: ... 1 0 1 0 1 0 1 0 ... (byte 2)

next shift left = 8

pushed bits to far left

r1 = r0 << 8: 1 0 1 0 1 0 1 0 ... 0 0 0 0 0 0 0 0

Next shift right = 24

pushed bits to far right

r1 = r1 >> 24: 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 1 0 1 0 1 0

unsigned zero-extension (all 0's)

Extracted bit-field

40

X
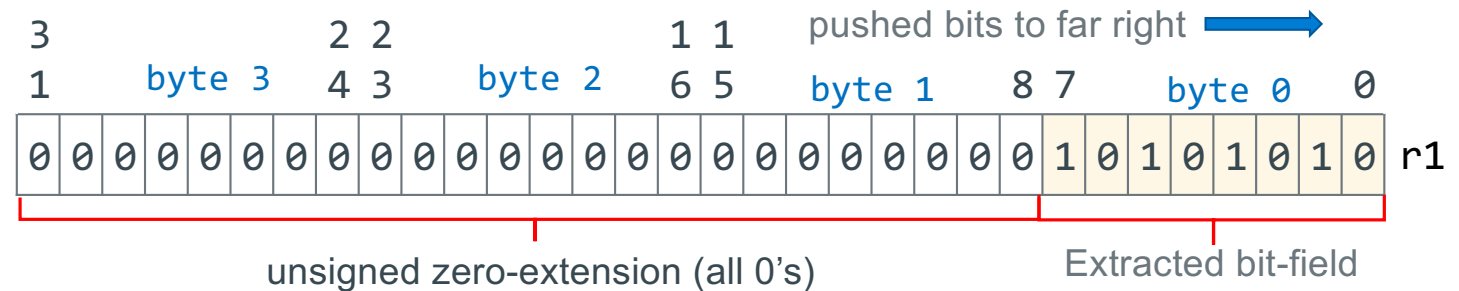
Extracting **Signed** Bitfields

- Move byte 2 in r0 to byte 0 in r1

```
          3                2 2              1 1
          1    byte 3      4 3    byte 2    6 5    byte 1      8 7    byte 0      0
```
| | | | | | | | |1|0|1|0|1|0|1|0| | | | | | | | | | | | | | | | | | | | | r0

next shift left = 8

pushed bits to far left

```
          3                2 2              1 1
          1    byte 3      4 3    byte 2    6 5    byte 1      8 7    byte 0      0
```
`lsl  r1, r0, 8` |1|0|1|0|1|0|1|0| | | | | | | | | | | | | | |0|0|0|0|0|0|0|0| r1
`int r0,r1;`
`r1 = r0 << 8;`

next shift right = 24

pushed bits to far right

```
          3                2 2              1 1
          1    byte 3      4 3    byte 2    6 5    byte 1      8 7    byte 0      0
```
`asr  r1, r1, 24` |1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|1|0|1|0|1|0|1|0| r1
`r1 = r1 >> 24;`

signed extend (all 1's)   Extracted
                                                             bit-field

41

X
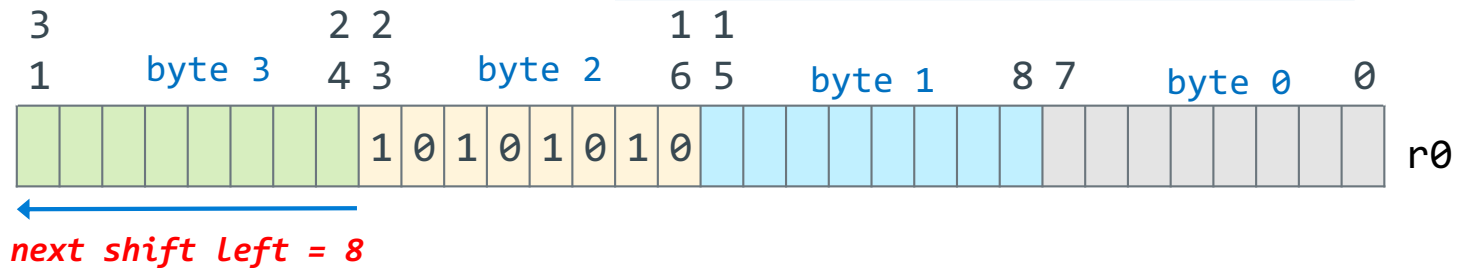
Inserting Bitfields – Inserting Source Field into Destination Field

Task: Insert source into destination

a	b	a | b
0	0	0
0	1	1
1	0	1
1	1	1

Approach
(1) isolate source field
(2) clear destination field
(3) Bitwise or together

```
orr     r1, r1, r2
r1 =    r1 | r2;
```

results in

Inserting Bitfields – Isolating the Source Field


```
isolate source field

lsl    r2, r0, 24
lsr    r2, r2, 8

r2 = r0 << 24;
r2 = r2 >> 8;
```
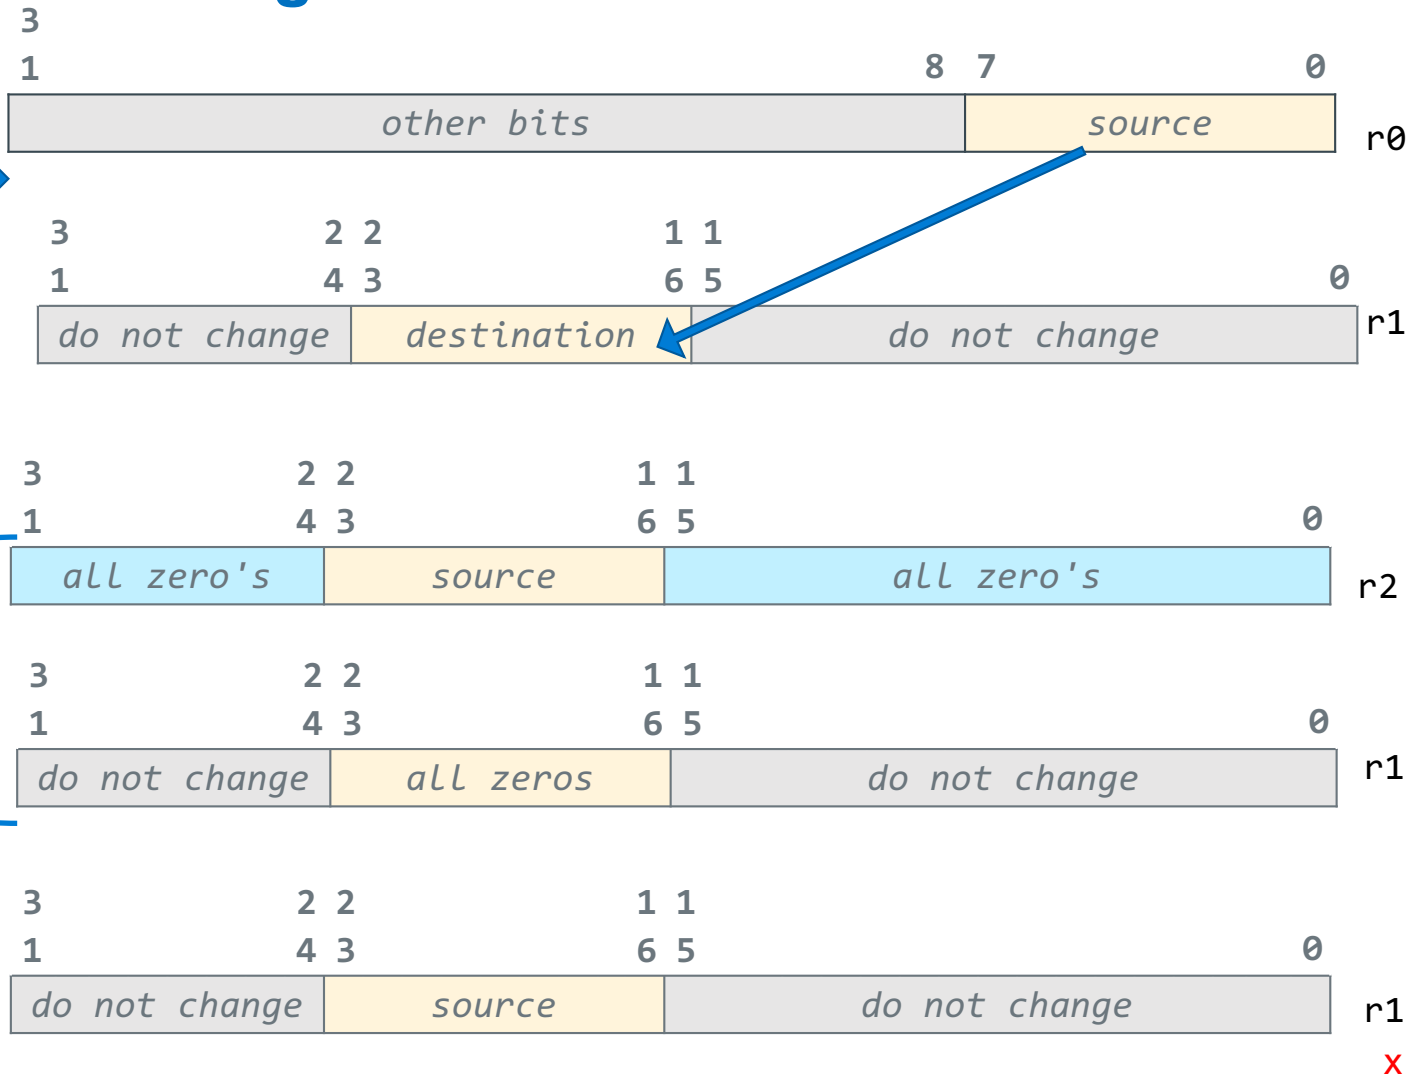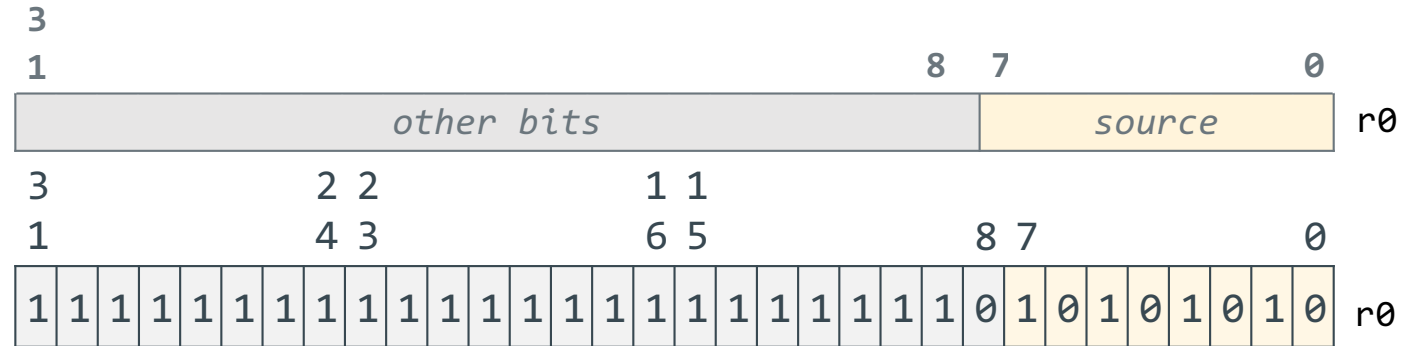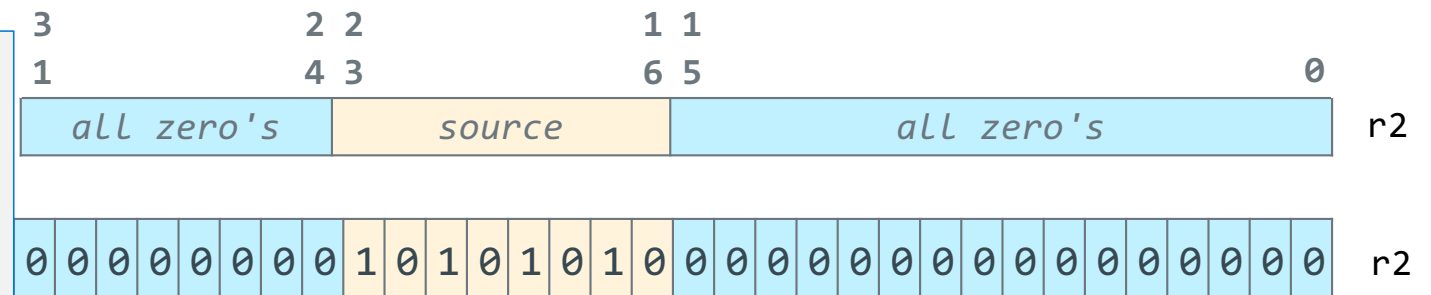
X

Inserting Bitfields – Clearing the Destination Field

	3				2 2				1 1				0	
	1				4 3				6 5					

do not change	destination	do not change	r1

| 1 0 1 0 1 0 1 0 | 1 1 1 0 1 1 1 1 | 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 | r1 |

**clear the
destination field
ror   r1, r1, 24
r1=(r1>>24)|(r1<<8);**

| 1 1 1 0 1 1 1 1 | 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 | r3 |

**lsl   r1, r1, 8
r1 = r1 << 8;**

| 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 0 0 0 0 0 0 0 0 | r1 |

	3				2 2				1 1				0	
	1				4 3				6 5					

do not change	all zeros	do not change	

**ror   r1, r1, 16
r1= (r1>>16)|(r1<<16);**

| 1 0 1 0 1 0 1 0 0 0 0 0 0 0 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 | r1 |

X
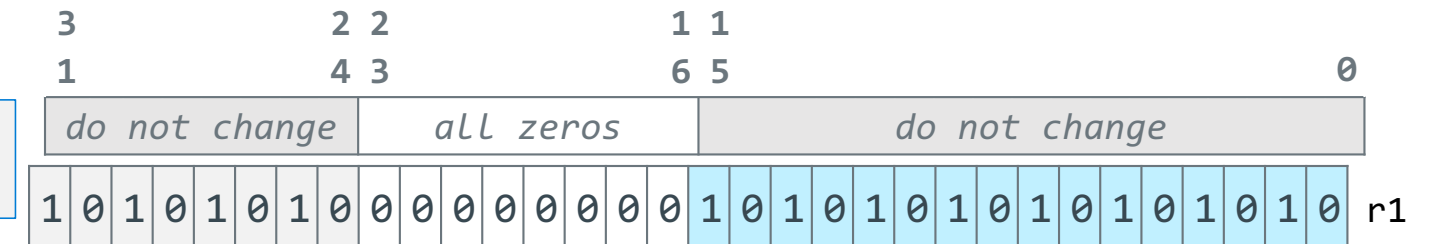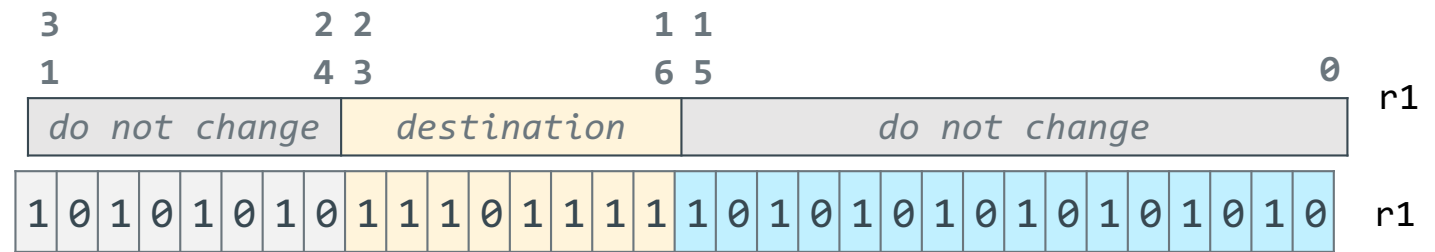
Inserting Bitfields –
Combining Isolated Source and Cleared Destination

```
3              2 2              1 1
1              4 3              6 5                    0
```
| all zero's | source | all zero's | r2 |

isolated source

| 0 0 0 0 0 0 0 0 1 0 1 0 1 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | r2 |

```
3              2 2              1 1
1              4 3              6 5                    0
```
| do not change | all zeros | do not change | r1 |
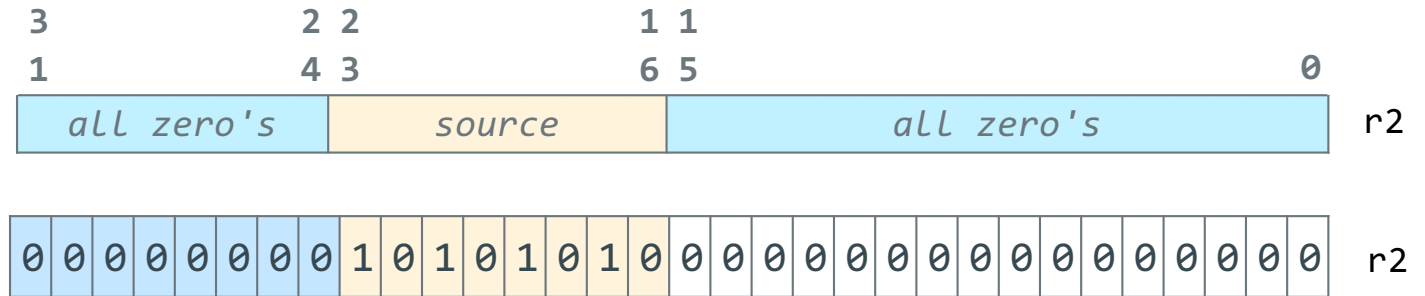
field cleared in destination

| 1 0 1 0 1 0 1 0 0 0 0 0 0 0 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 | r1 |
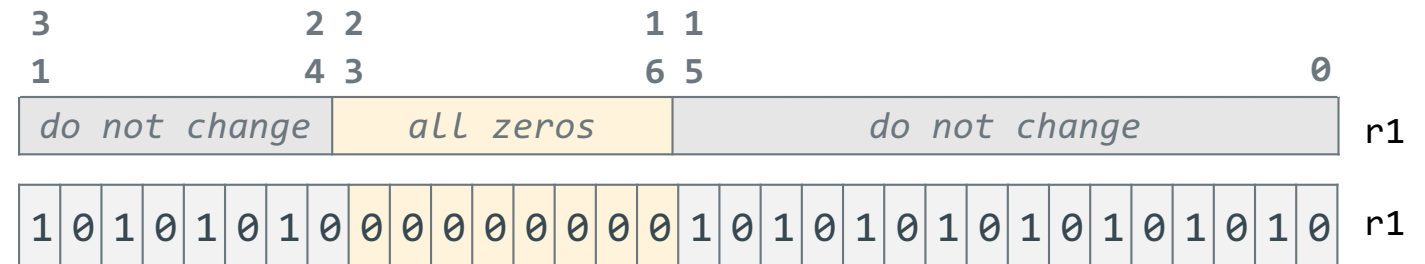
inserted field
```
orr    r1, r1, r2
r1 = r1 | r2;
```

| 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 | r1 |

45

X

Example: Swapping bits7,6 with bits 1,0

source
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | |

```
and    r1, r0, 0x3
(optional bits 31-8 == 0)
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r1 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | |

```
lsl    r1, r1, 6
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r1 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |

```
lsr    r1, r0, 6
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r2 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | |

```
and    r0, r0, 0xc3
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | |

```
orr    r0, r0, r2
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | |

```
orr    r0, r0, r1
```
| | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | r0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | |

x

Masking Summary

**Select a field:** Use **and** with a mask of one's surrounded by zero's to select the bits that have a 1 in the mask, all other bits will be set to zero

selects this field when used with and

| 0 0 0 0 0 0 0 0 | 1 1 1 1 1 1 1 1 | 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 |

selection mask

Clear a field: Use **and** with a mask of zero's surrounded by one's to select the bits that have a 1 in the mask, all other bits will be set to zero

clears this field when used with and

| 1 1 1 1 1 1 1 1 | 0 0 0 0 0 0 0 0 | 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |

clear a field mask

Isolate a field: Use **lsr, lsl, rot** to get a field surrounded by zeros

| 0 0 0 0 0 0 0 0 | *source* | 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 |

lsl to get this edge into msb

lsr to get this edge into lsb

Insert a field: Use **orr** with fields surrounded by zeros

| 0 0 0 0 0 0 0 0 | *source* | 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 |

| Keep these bits | 0 0 0 0 0 0 0 0 | Keep these bits |

X