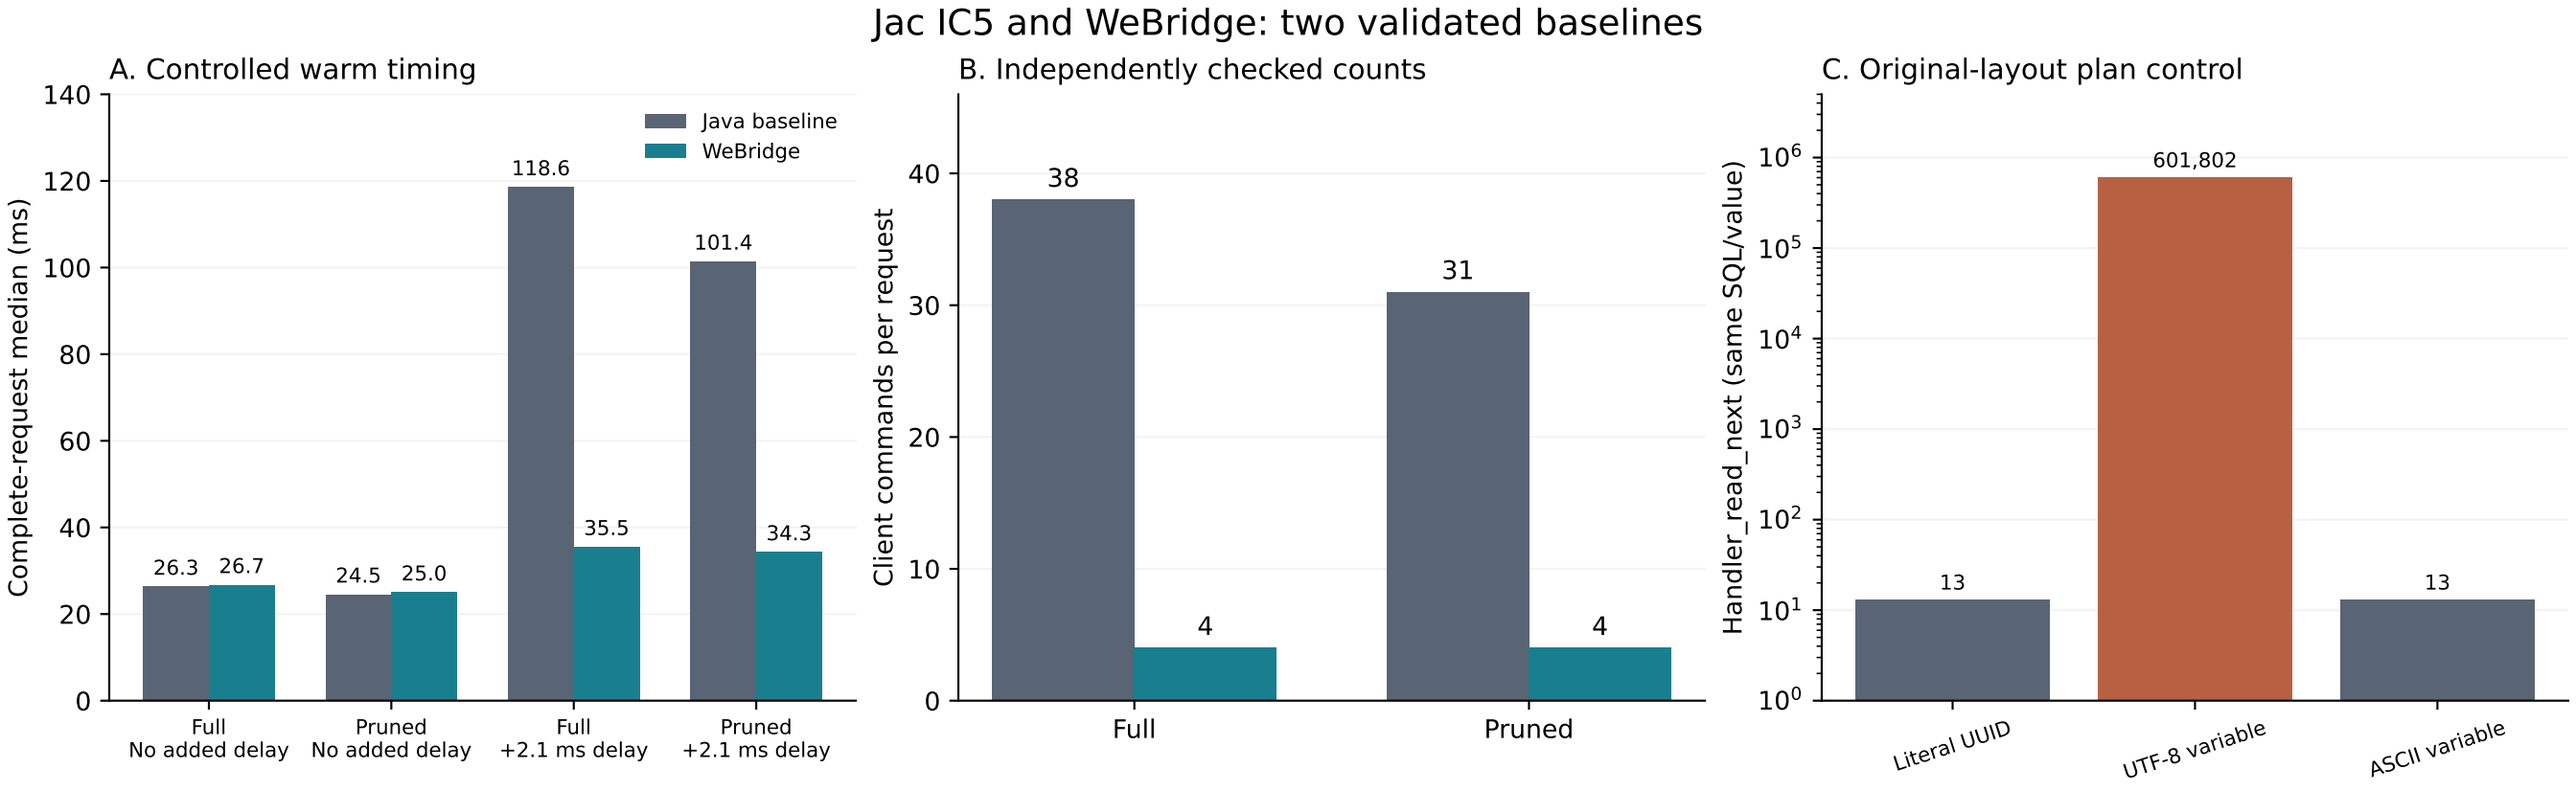
Jac IC5 and WeBridge: two validated baselines
A. Controlled warm timing
Java baseline
WeBridge
Complete-request median (ms)
140
120
100
80
60
40
20
0
26.3
26.7
24.5
25.0
118.6
35.5
101.4
34.3
Full
No added delay
Pruned
No added delay
Full
+2.1 ms delay
Pruned
+2.1 ms delay
B. Independently checked counts
Client commands per request
40
30
20
10
0
38
4
31
4
Full
Pruned
C. Original-layout plan control
Handler_read_next (same SQL/value)
10^6
10^5
10^4
10^3
10^2
10^1
10^0
13
601,802
13
Literal UUID
UTF-8 variable
ASCII variable