


Practice for lab12

Practice 12.1

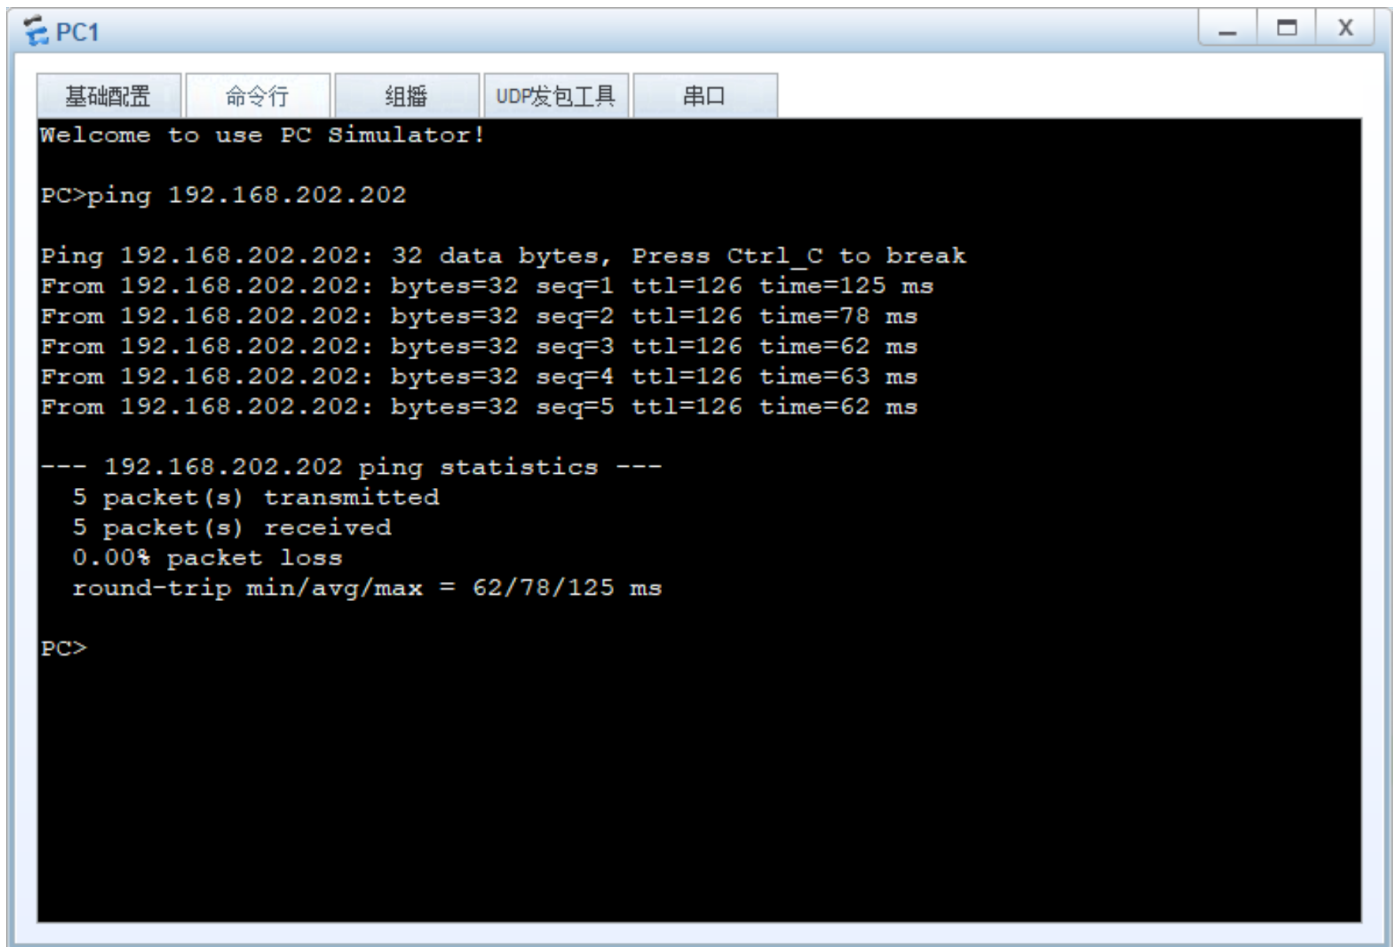

The image shows a window titled "PC1" with a blue header bar. Below the header is a tabbed interface with five tabs: "基础配置" (Basic Configuration), "命令行" (Command Line), "组播" (Multicast), "UDP发包工具" (UDP Packet Tool), and "串口" (Serial Port). The "命令行" tab is selected, displaying a black command prompt window. The text in the command prompt is as follows:



```
Welcome to use PC Simulator!

PC>ping 192.168.202.202

Ping 192.168.202.202: 32 data bytes, Press Ctrl_C to break
From 192.168.202.202: bytes=32 seq=1 ttl=126 time=125 ms
From 192.168.202.202: bytes=32 seq=2 ttl=126 time=78 ms
From 192.168.202.202: bytes=32 seq=3 ttl=126 time=62 ms
From 192.168.202.202: bytes=32 seq=4 ttl=126 time=63 ms
From 192.168.202.202: bytes=32 seq=5 ttl=126 time=62 ms

--- 192.168.202.202 ping statistics ---
 5 packet(s) transmitted
 5 packet(s) received
 0.00% packet loss
 round-trip min/avg/max = 62/78/125 ms

PC>
```

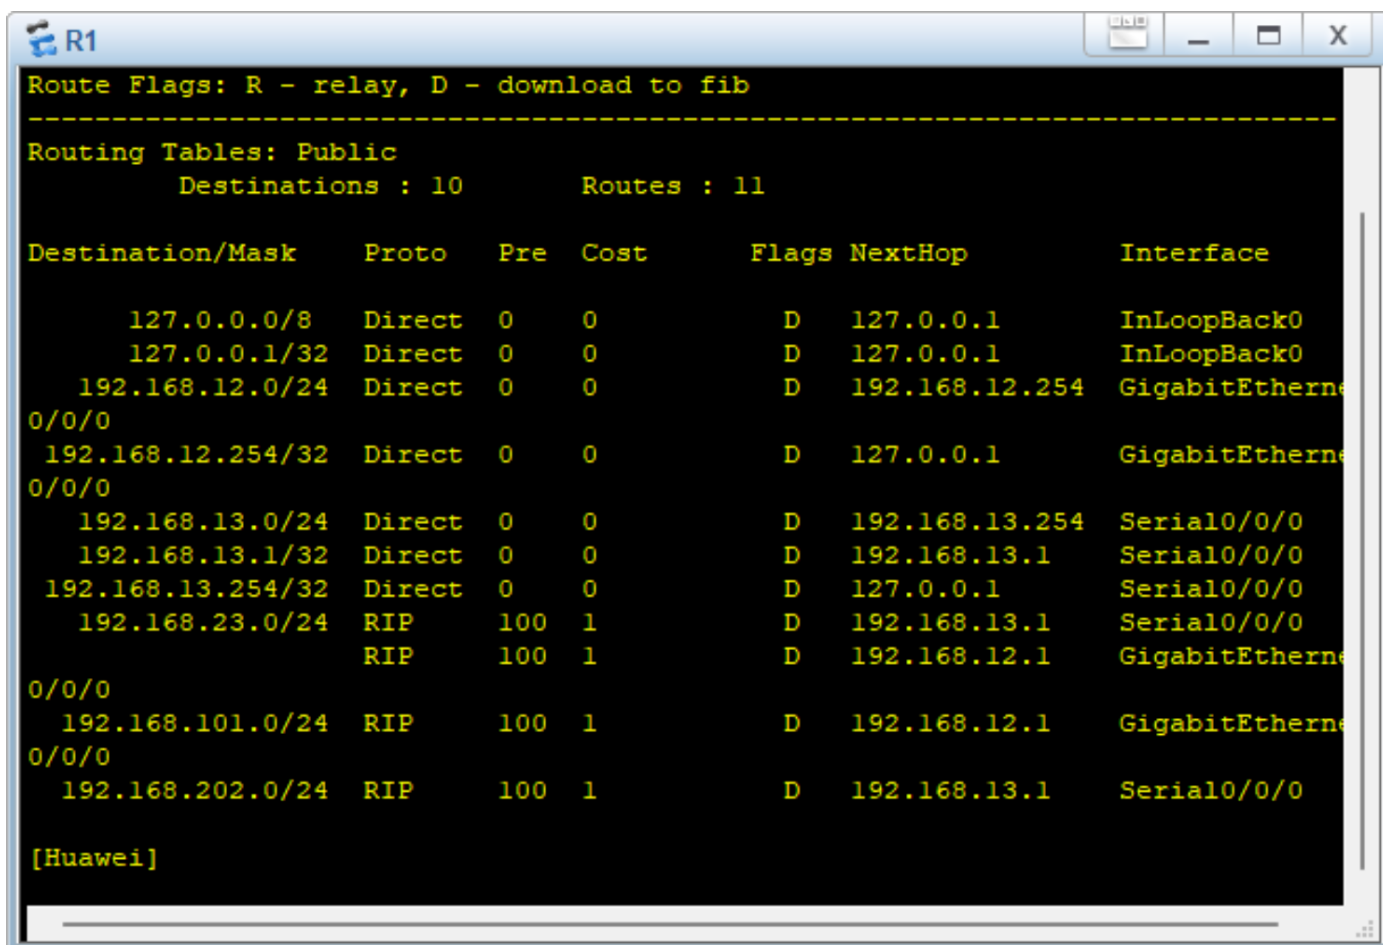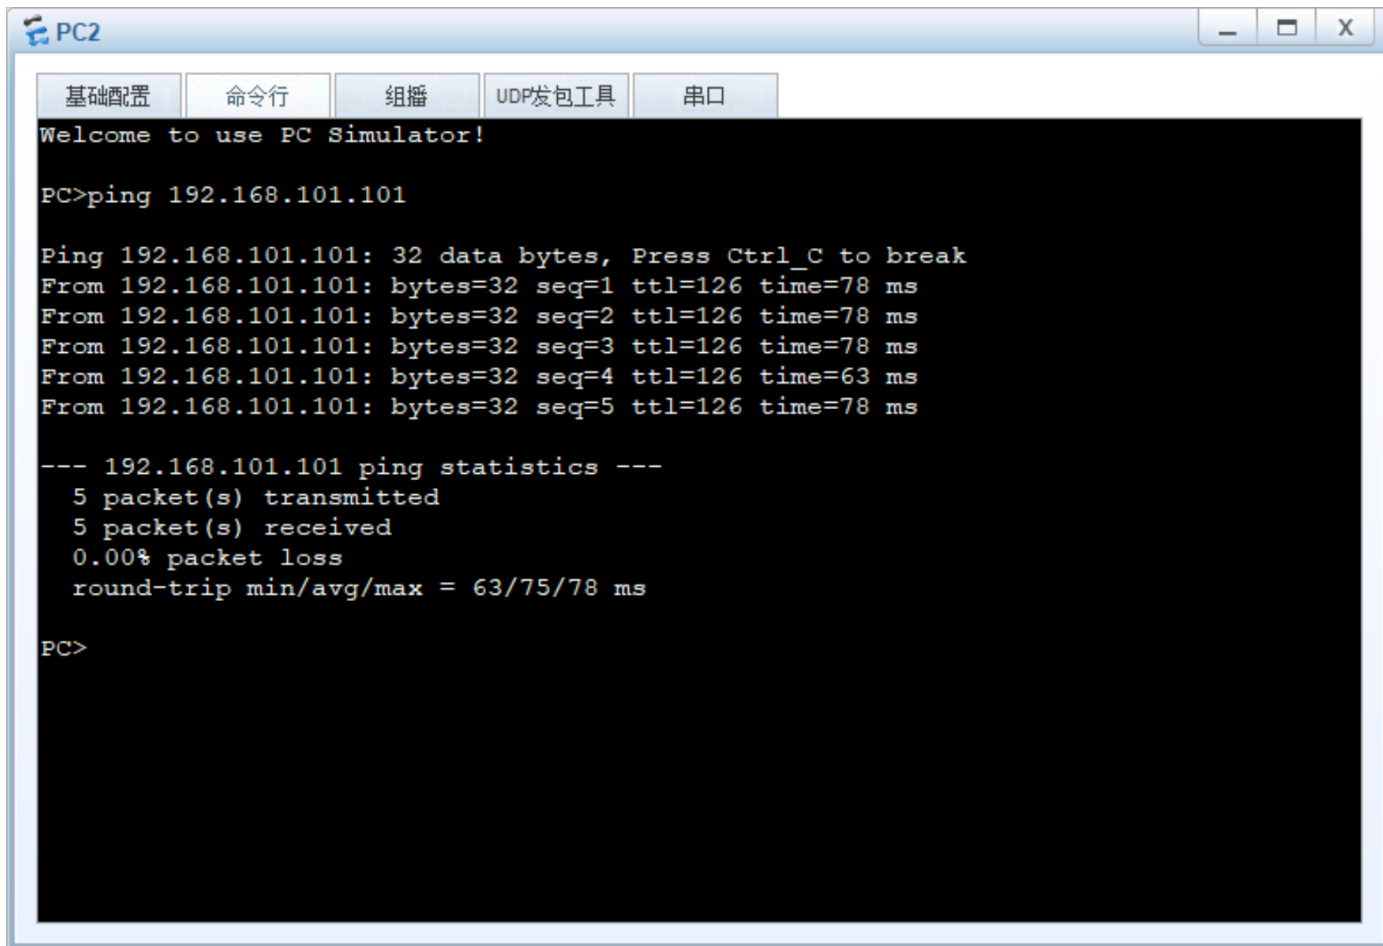

R1	destination/Mask	proto	pre	cost	nexthop	interface
OSPF	192.168.23.0/24	OSPF	10	2	192.168.12.1	GE0/0/0
RIPv2	192.168.23.0/24	RIPv2	100	2	192.168.12.1	GE0/0/0
OSPF	192.168.101.0/24	OSPF	10	2	192.168.12.1	GE0/0/0
RIPv2	192.168.101.0/24	RIPv2	100	2	192.168.12.1	GE0/0/0
OSPF	192.168.202.0/24	OSPF	10	3	192.168.12.1	GE0/0/0
RIPv2	192.168.202.0/24	RIPv2	100	2	192.168.13.1	Serial0/0/0

Practice 12.2

PC3

基础配置

命令行

组播

UDP发包工具

串口

```

From 192.168.2.103: Destination host unreachable
From 192.168.2.103: Destination host unreachable
From 192.168.2.103: Destination host unreachable
From 192.168.2.103: Destination host unreachable

--- 192.168.2.104 ping statistics ---
 5 packet(s) transmitted
 0 packet(s) received
100.00% packet loss

PC>ping 192.168.2.104

Ping 192.168.2.104: 32 data bytes, Press Ctrl_C to break
From 192.168.2.104: bytes=32 seq=1 ttl=128 time=47 ms
From 192.168.2.104: bytes=32 seq=2 ttl=128 time=46 ms
From 192.168.2.104: bytes=32 seq=3 ttl=128 time=47 ms
From 192.168.2.104: bytes=32 seq=4 ttl=128 time=46 ms
From 192.168.2.104: bytes=32 seq=5 ttl=128 time=47 ms

--- 192.168.2.104 ping statistics ---
 5 packet(s) transmitted
 5 packet(s) received
 0.00% packet loss
round-trip min/avg/max = 46/46/47 ms

PC>

```

PC3

基础配置 命令行 组播 UDP发包工具 串口

From 192.168.2.104: bytes=32 seq=3 ttl=128 time=47 ms
From 192.168.2.104: bytes=32 seq=4 ttl=128 time=46 ms
From 192.168.2.104: bytes=32 seq=5 ttl=128 time=47 ms

--- 192.168.2.104 ping statistics ---
5 packet(s) transmitted
5 packet(s) received
0.00% packet loss
round-trip min/avg/max = 46/46/47 ms

PC>ping 192.168.1.101

Ping 192.168.1.101: 32 data bytes, Press Ctrl_C to break
From 192.168.1.101: bytes=32 seq=1 ttl=127 time=141 ms
From 192.168.1.101: bytes=32 seq=2 ttl=127 time=78 ms
From 192.168.1.101: bytes=32 seq=3 ttl=127 time=78 ms
From 192.168.1.101: bytes=32 seq=4 ttl=127 time=78 ms
From 192.168.1.101: bytes=32 seq=5 ttl=127 time=94 ms

--- 192.168.1.101 ping statistics ---
5 packet(s) transmitted
5 packet(s) received
0.00% packet loss
round-trip min/avg/max = 78/93/141 ms

PC>

The arp request referred to in the following text specifically refers to the one sent by PC3	invoke“ping”on PC3 to reach PC4	invoke“ping”on PC3 to reach PC1
sender IP in the ARP request	192.168.2.103	192.168.2.103
target IP in the ARP request	192.168.2.104	192.168.1.101
While the ARP request reach to LSW2, list interfaces on LSW2 on which the ARP request was forwarded from. (Eth0/0/3, Eth0/0/4, Ge0/0/1)	Eth0/0/3, Eth0/0/4, Ge0/0/1	Eth0/0/3, Eth0/0/4, Ge0/0/1
Does the ARP request reach to the router?(Y/N)	Yes	Yes
If the ARP request reach to the router, what does the router do after receiving the ARP request? (forward/drop/reply)	Drop	Reply
Which network nodes' MAC addresses would been learnt by LSW2 in this testing? (PC1, PC2, PC3, PC4, which interface of R1, which interface of LSW1, which interface of LSW2)	PC3@Eth0/0/1,PC4@Eth0/0/4	PC3@Eth0/0/1,PC1@GE0/0/1