



Fridge-side display mount — flat pattern, A36/1008 mild steel 0.187" (4.75 mm)

portrait · formed arm 180 + neck 257 + body 310 mm · arm width 190 mm · bend deduction 8.19 mm · flat 310.0 x 738.8 mm

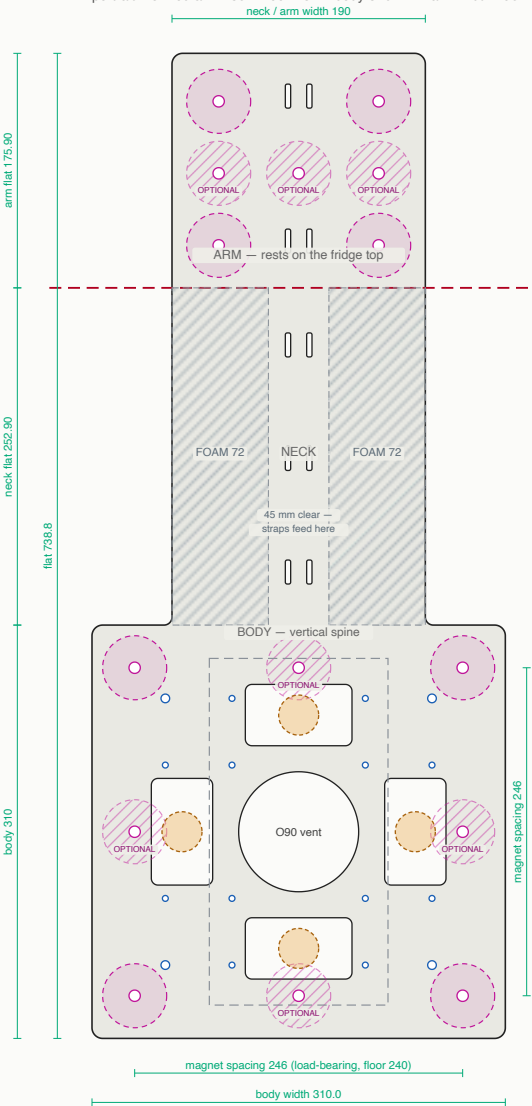

SIDE ELEVATION — hook load path

schematic, 0.55x. Vertical load bears at the top corner; magnets carry none.

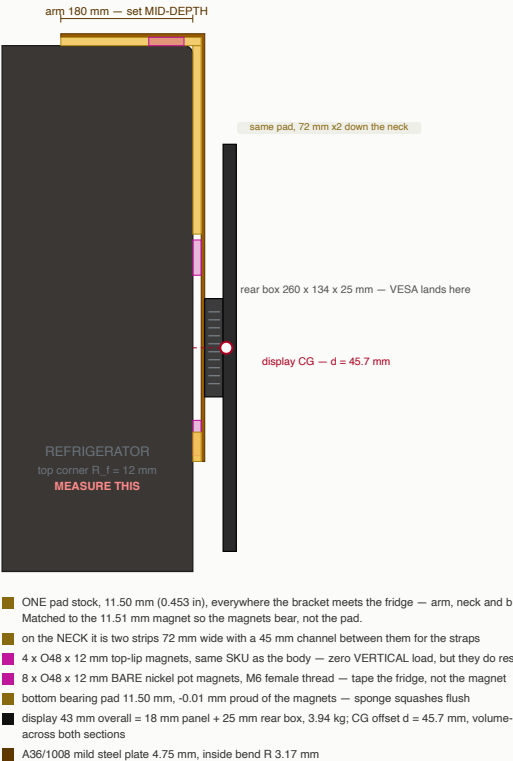

Vertical load 24.93 lb (display 8.69 + bracket 16.24) bears at the top corner. Magnets carry ZERO vertical load.

Touch torsion: 5 lb at 162 mm = 32.0 in-lb over 246 mm spacing -> 3.30 lb/side, 1.65 lb/magnet (SF 37.1x on 61.25 lb derated pull).

Peel 2.24 lb over H = 278 mm — negligible, as expected. Arm pad budget 3.46 mm = corner gap at the R_t f = 15 mm envelope; the 11.50 mm (1/4 in) pad gives 3.32x and covers a measured R_t up to 35 mm.

Display is not a slab: 18 mm panel + 25 mm raised rear box = 43 mm overall. VESA on the box. Vent windows sit at R88 so one lands over the Pi fan opening in every 90 deg rotation.

Neck bending 562 psi (SF 64x); body weak axis 430 psi (SF 84x) vs 36000 psi yield. No ribs required.