




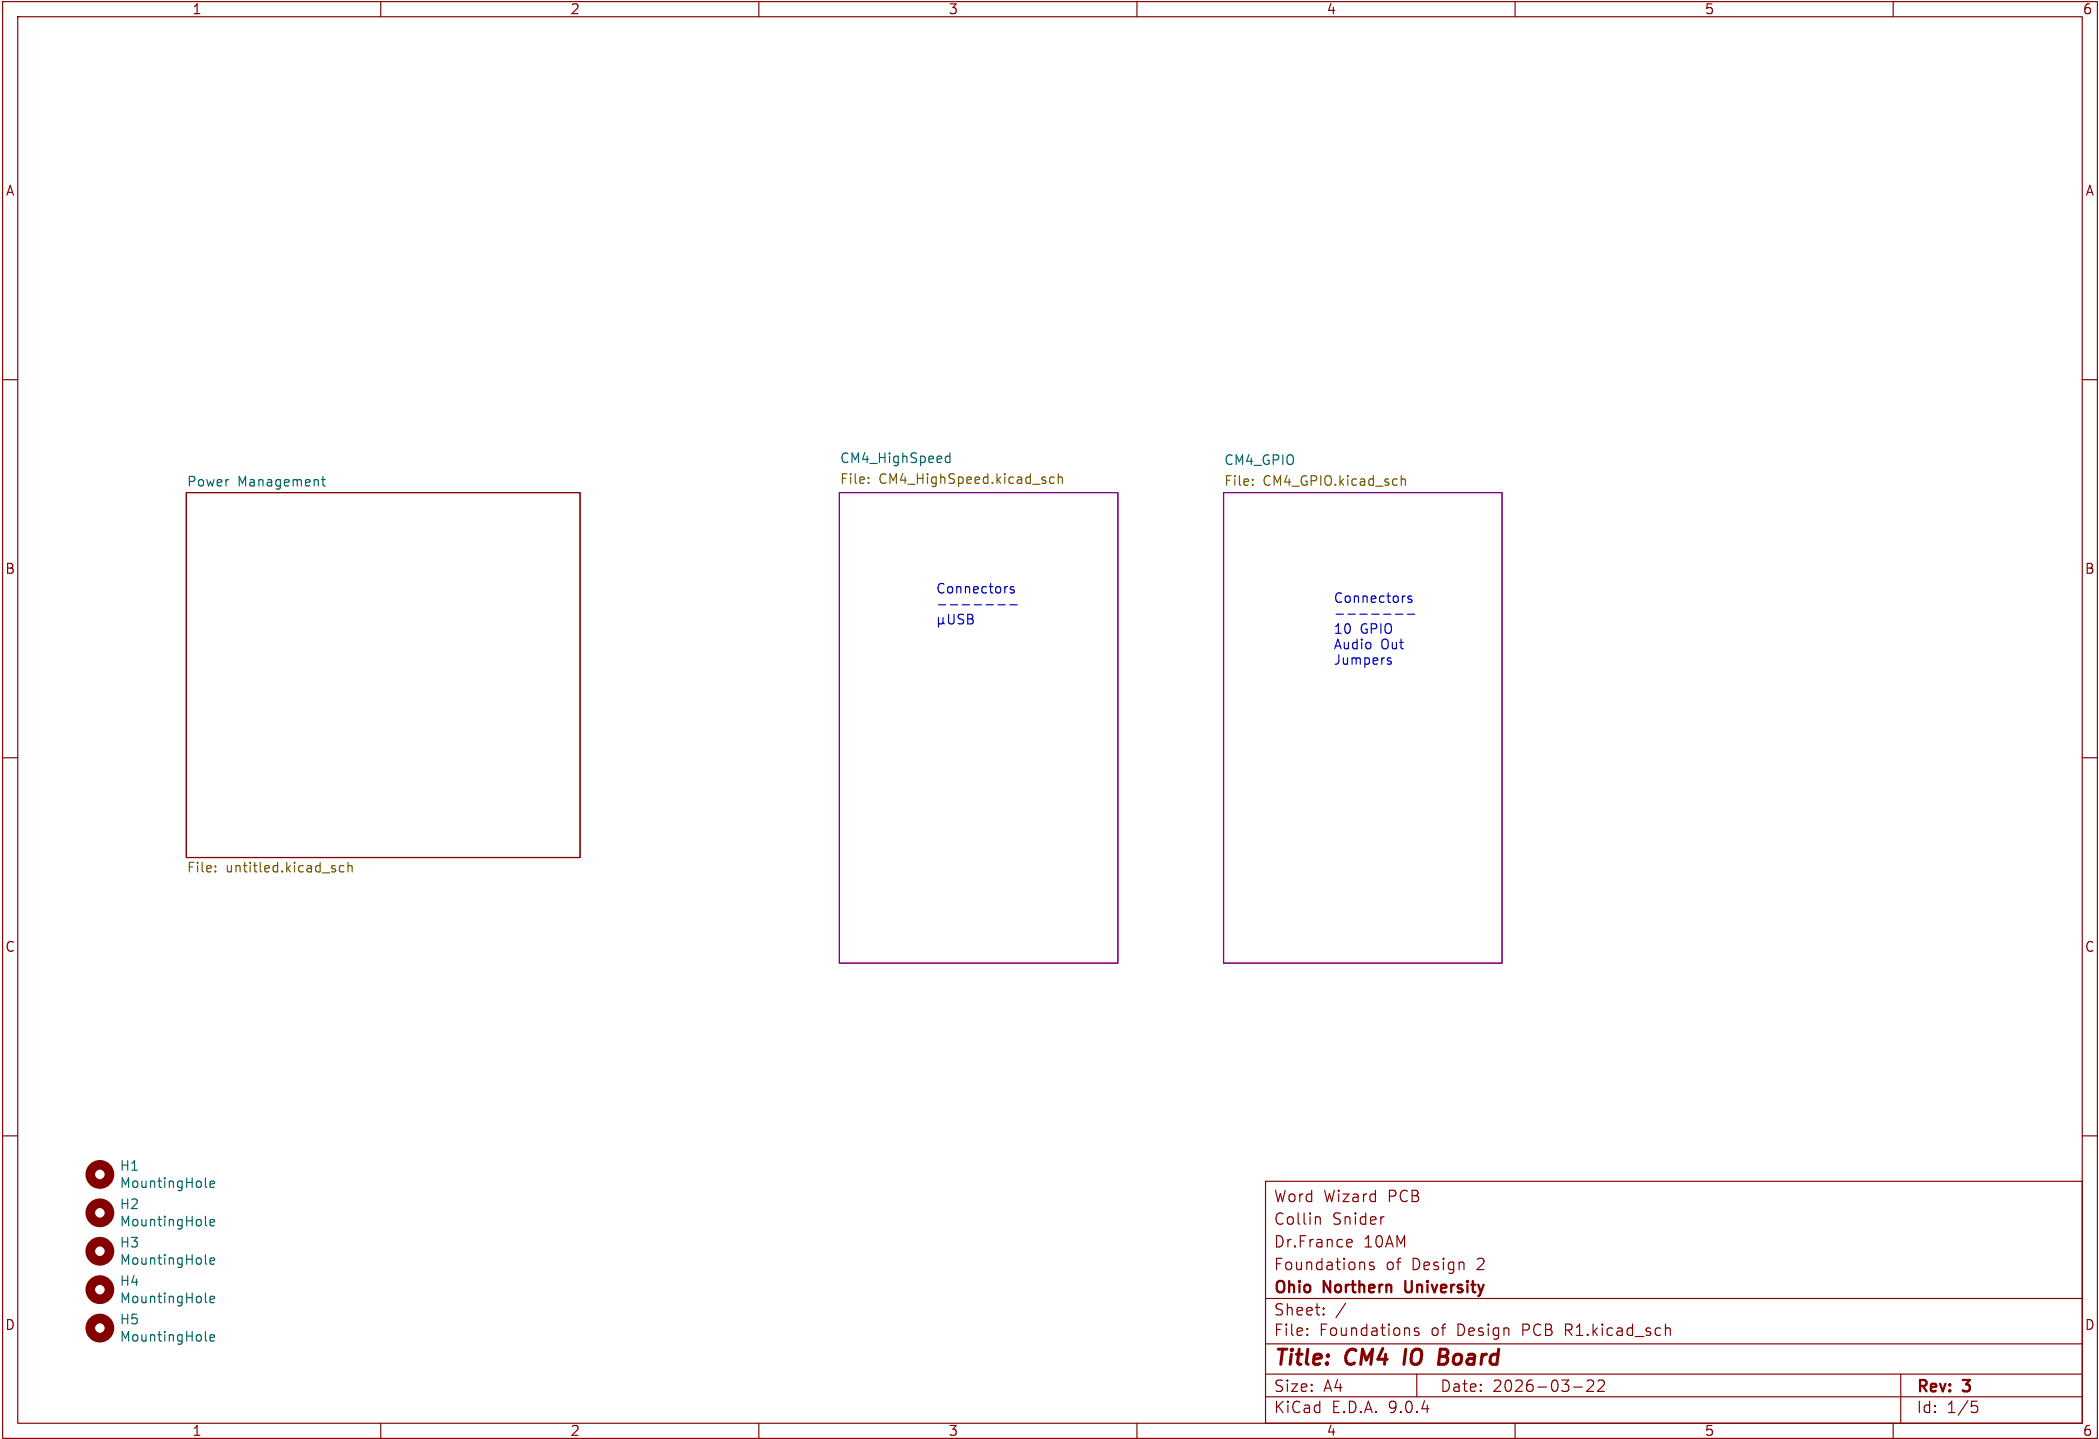

J3
USB_C_Receptacle_PowerOnly_24P

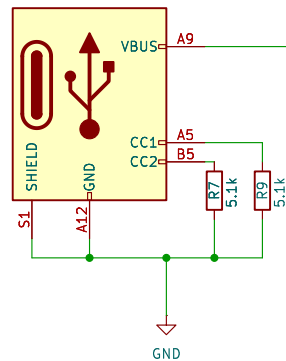

R2: 8k Ω = 2.2A charge current ~ 0.4C for battery
R3: 150k Ω = 8.4V charging voltage
R4: 383 Ω = 2.9A max input current

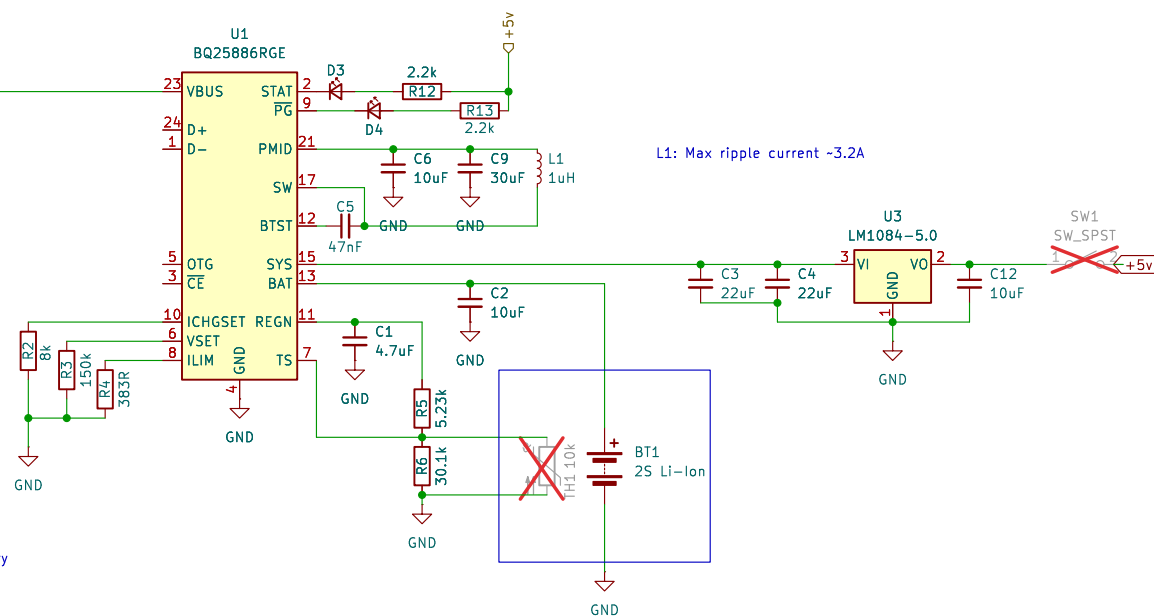

L1: Max ripple current ~3.2A

Word Wizard PCB

Collin Snider

Dr.France 10AM

Foundations of Design 2

Ohio Northern University

Sheet: /Power Management/

File: untitled.kicad_sch


Title: CM4 IO Board

Size: A4 Date: 2026-03-22


KiCad E.D.A. 9.0.4


Rev: 3

Id: 4/5

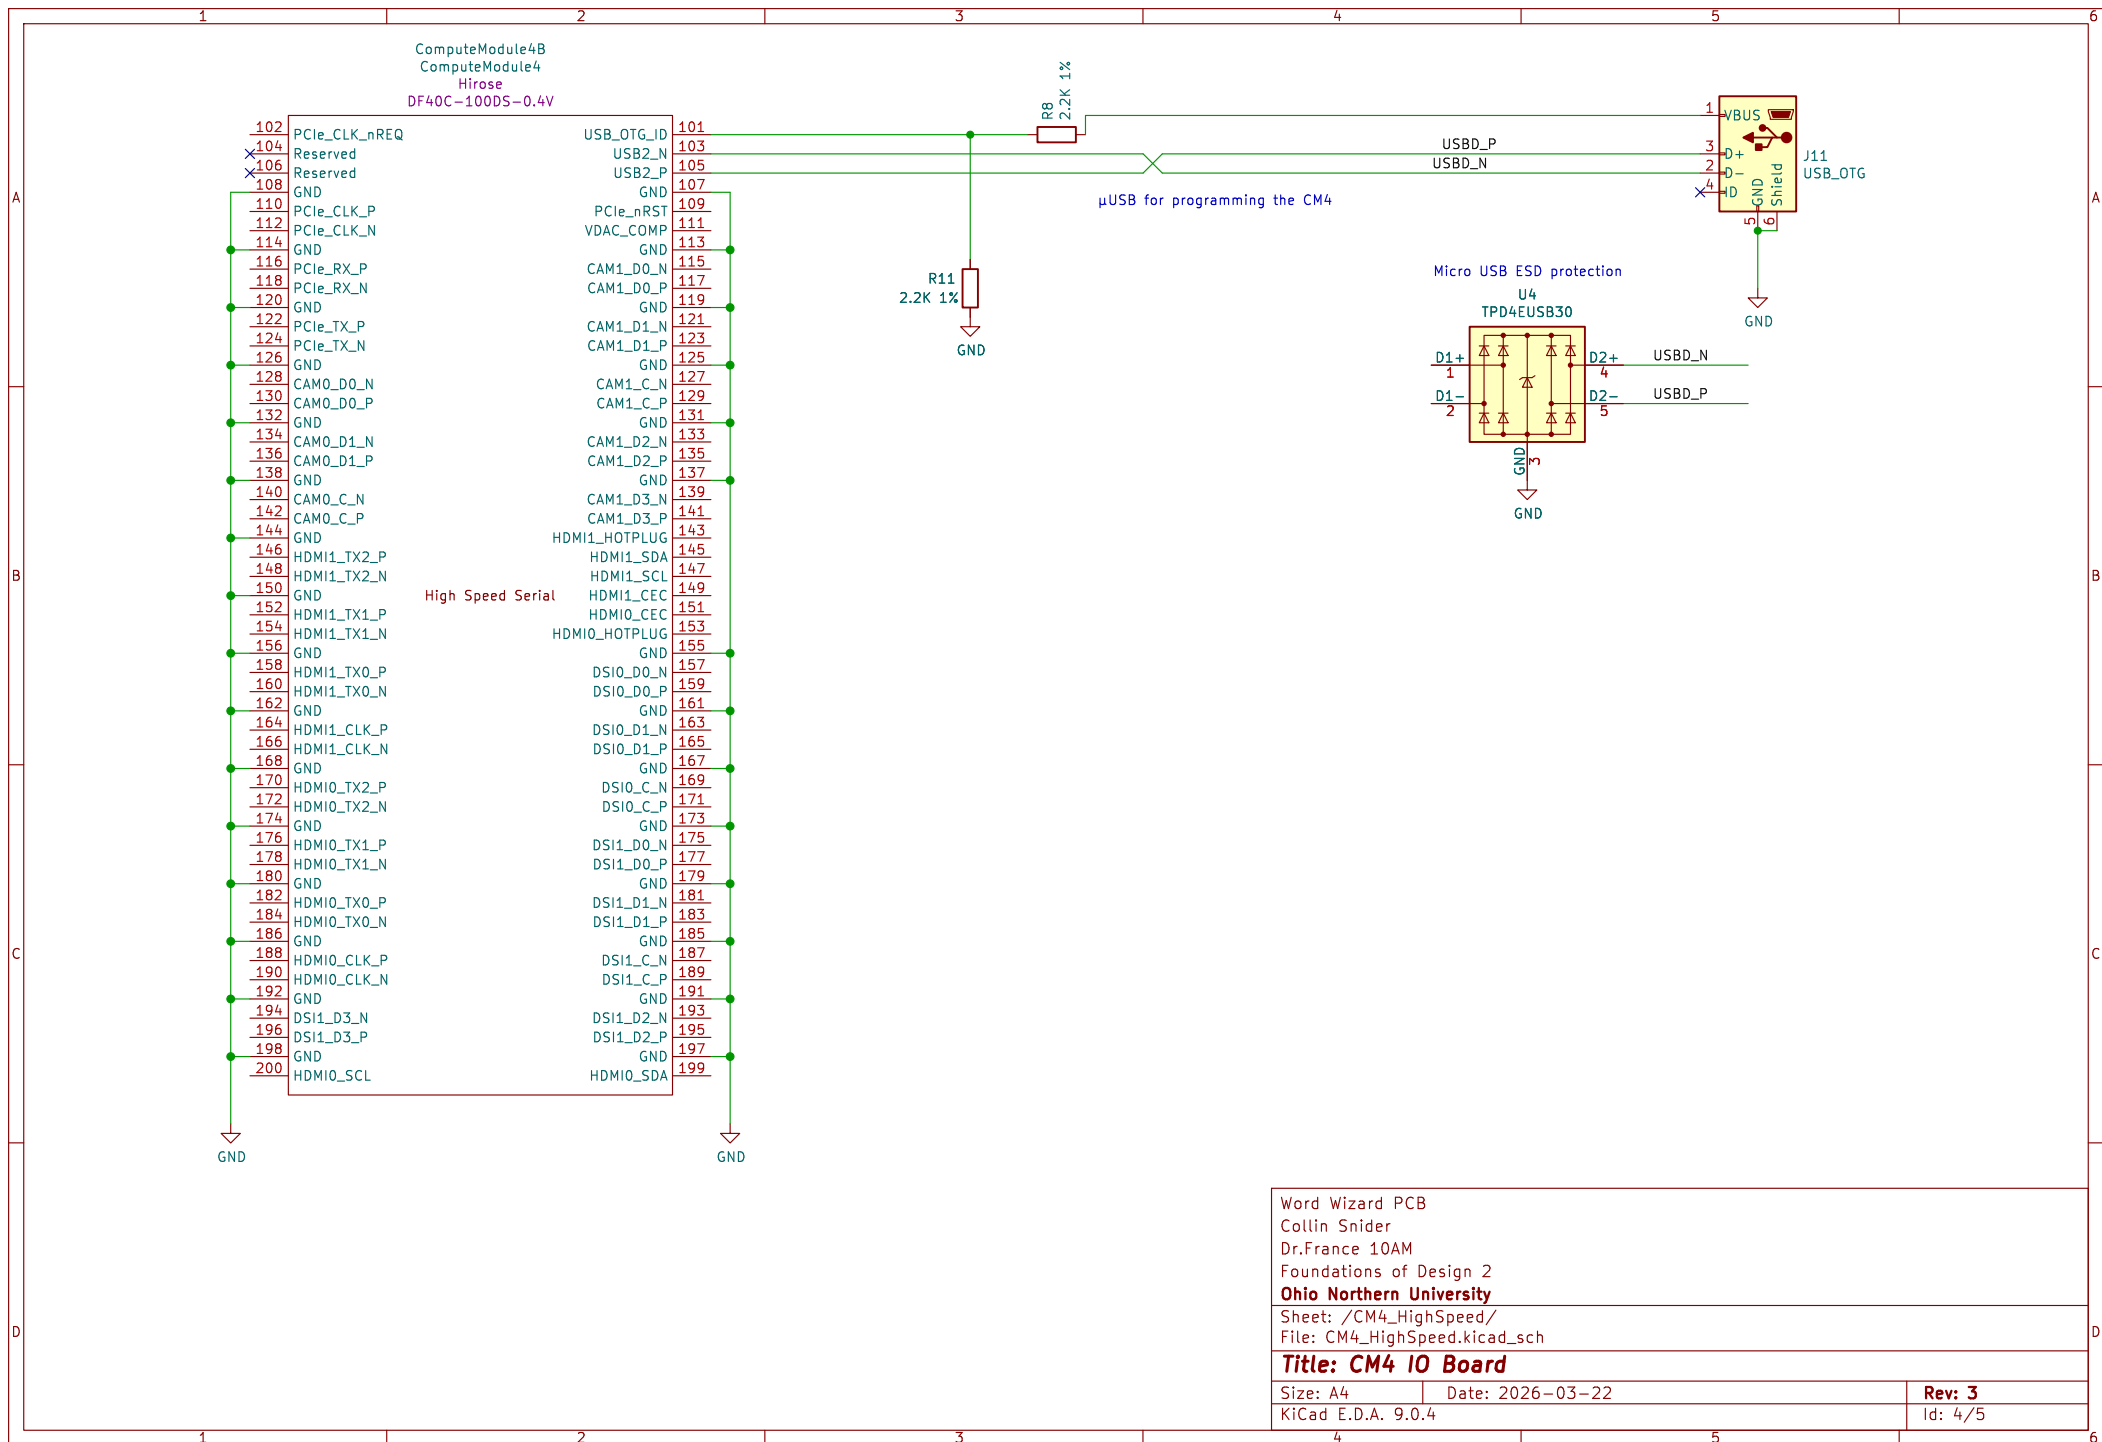

Word Wizard PCB Collin Snider Dr.France 10AM Foundations of Design 2 Ohio Northern University		
Sheet: /CM4_HighSpeed/ File: CM4_HighSpeed.kicad_sch		
Title: CM4 IO Board		
Size: A4	Date: 2026-03-22	Rev: 3
KiCad E.D.A. 9.0.4		Id: 4/5

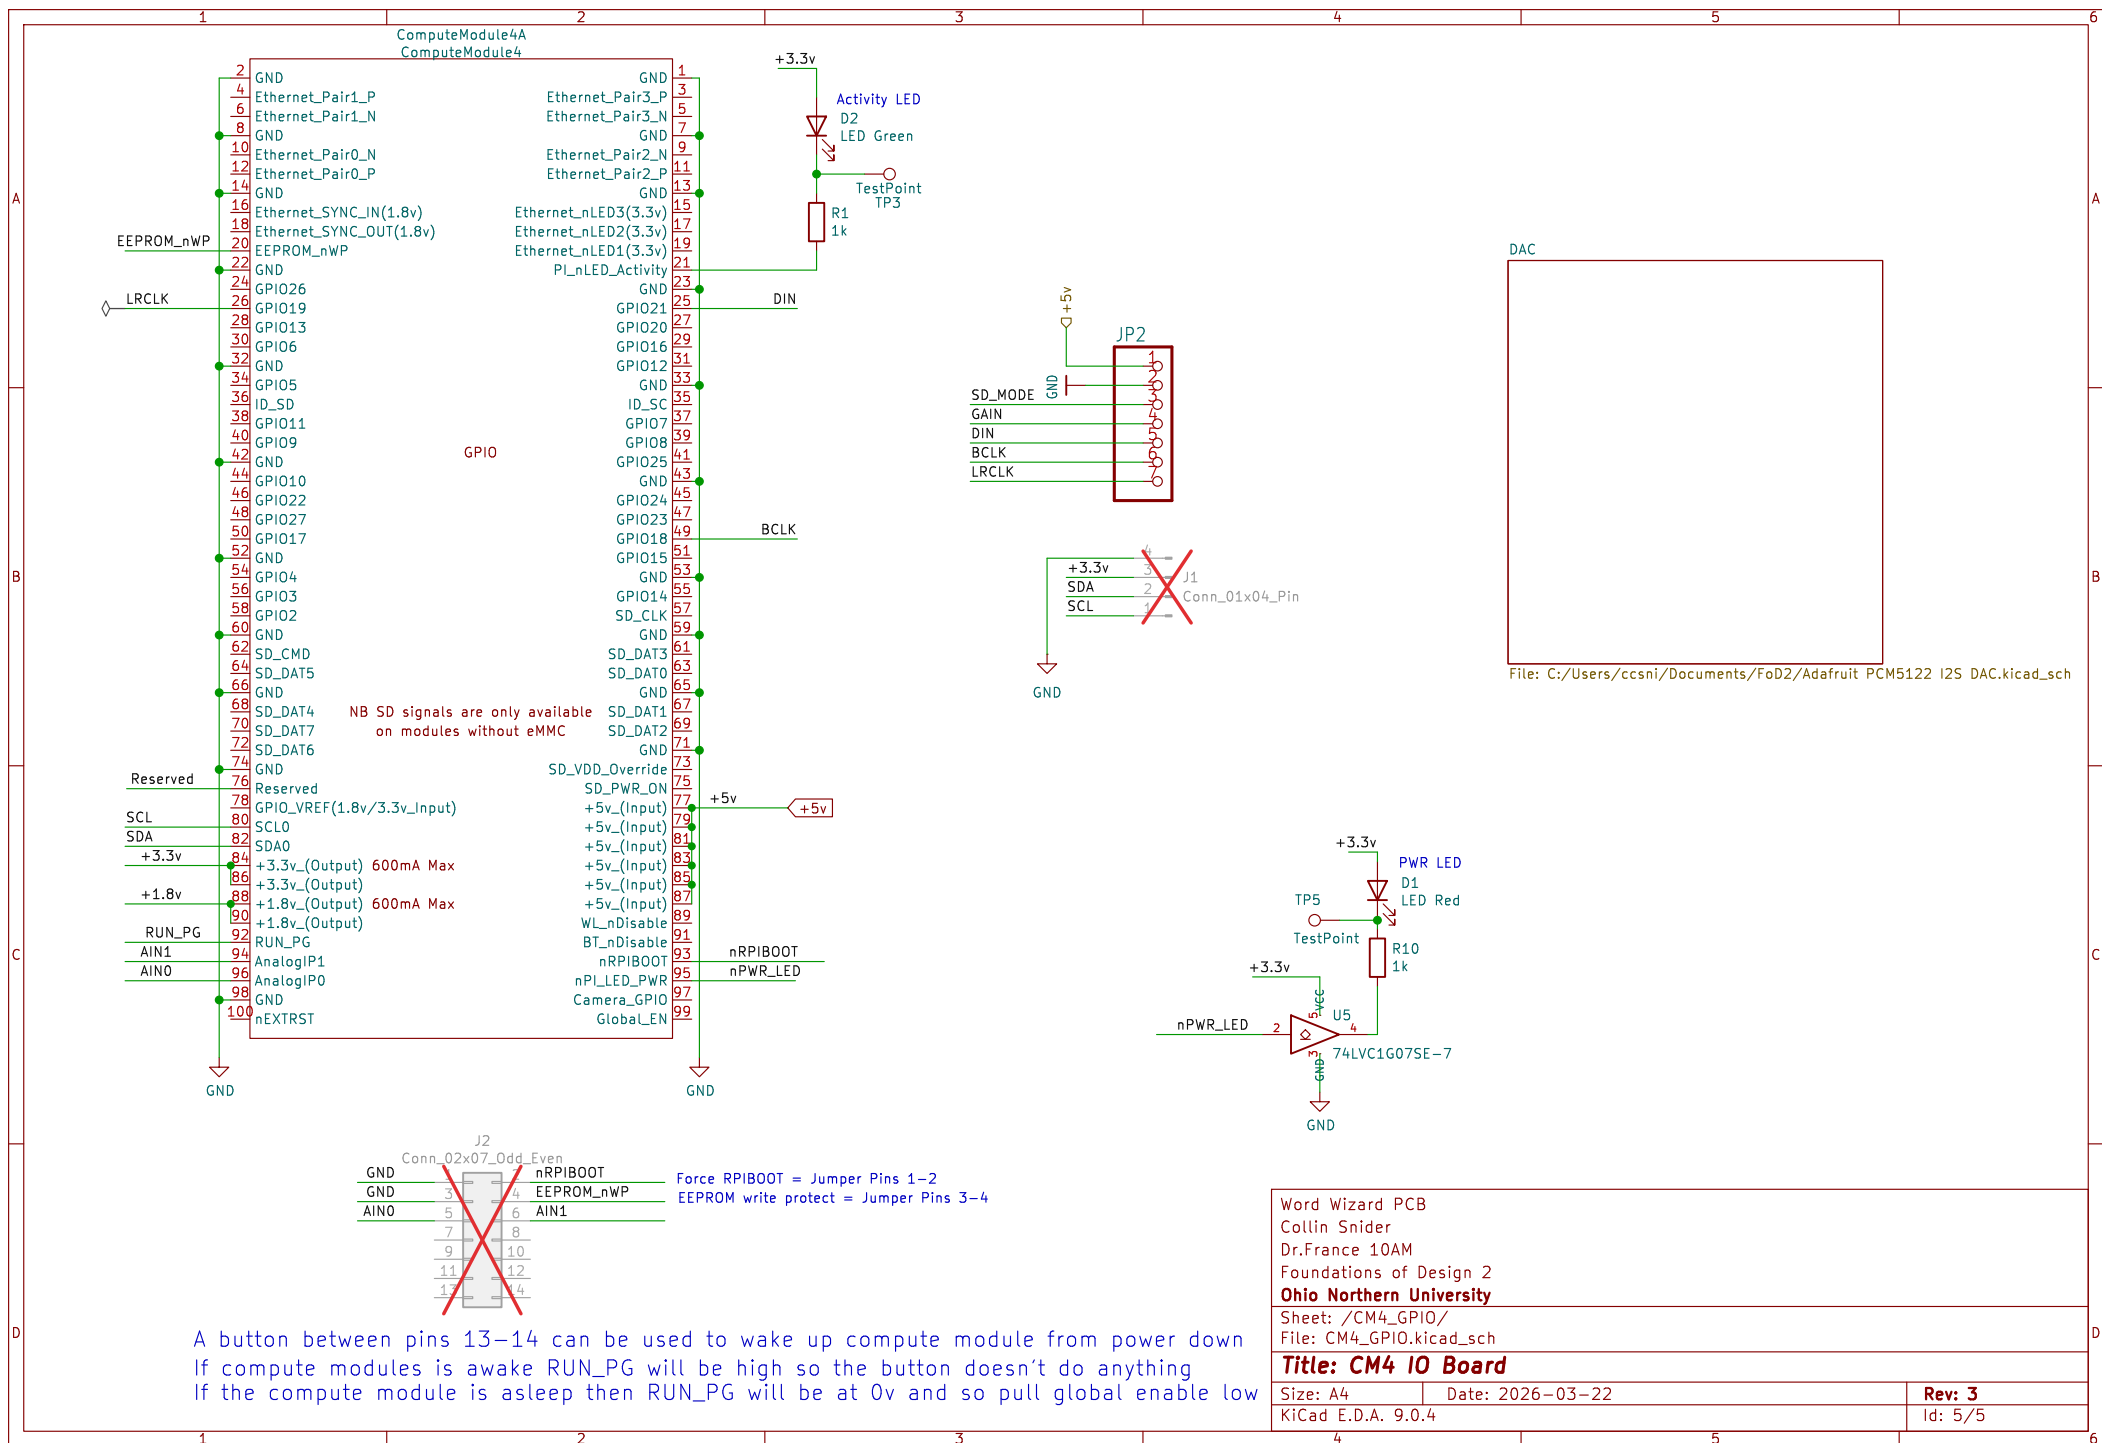

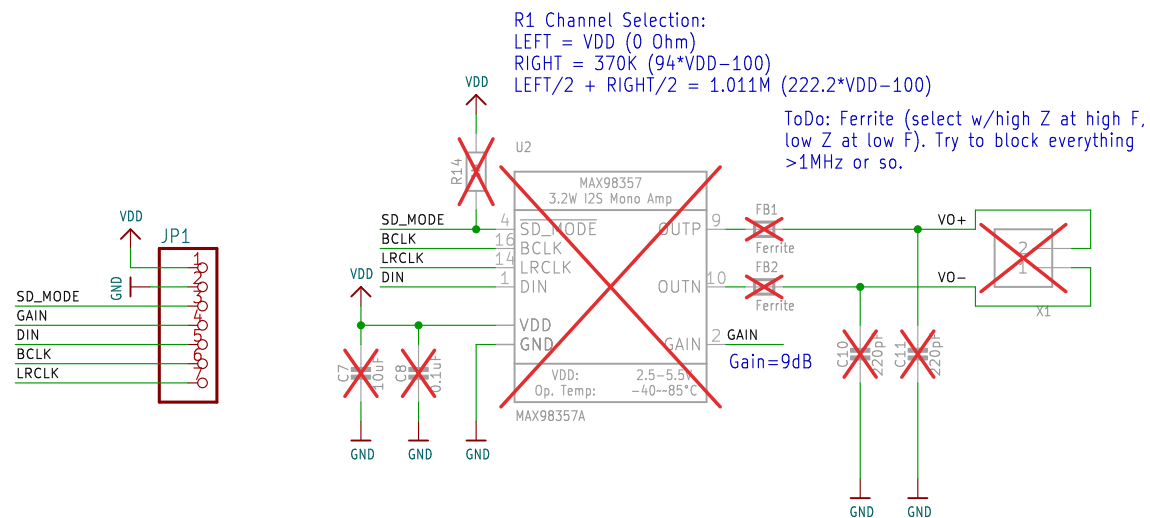

Word Wizard PCB
 Collin Snider
 Dr.France 10AM
 Foundations of Design 2
Ohio Northern University
 Sheet: /CM4_GPIO/DAC/
 File: Adafruit PCM5122 I2S DAC.kicad_sch

Title: CM4 IO Board

Size: User Date: 2026-03-22
 KiCad E.D.A. 9.0.4

Rev: 3
 Id: 5/5