

Setup Sheet for Program Demo Program

▼ Summary

Program comment: Number of operations: 5

Design document: Number of tools: 1

Model-Demo (Assembly) Tools: T1

Product version: Maximum Z: 25 mm

Fusion CAM 2703.1.11 Minimum Z: 0.4 mm

Created:

6/11/2026 1:47:44 AM

Number of setups: 1


Maximum feedrate: 750 mm/min

Maximum spindle speed: 10000 rpm

Cutting distance: 7168.193 mm

Rapid distance: 1290.378 mm

Estimated cycle time: 10m 15s

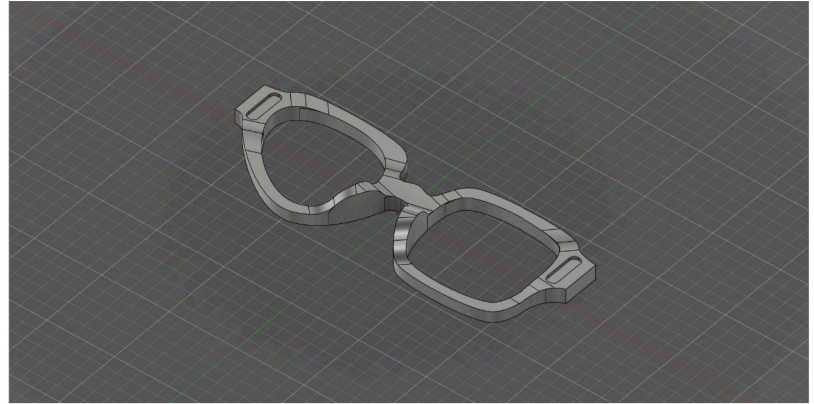

▼ Tools

Number: 1

Diameter offset: 1

Length offset: 1

Tool type: flat end mill

Diameter: 3.175 mm

Length: 24 mm

Number of flutes: 1

Tool description:

Default Cutter

Tool product:

Minimum Z: 0.4 mm

Maximum feedrate:

750 mm/min

Maximum spindle speed:

10000 rpm

Cutting distance:

7168.193 mm

Rapid distance: 1290.378 mm

Estimated cycle time: 10m 15s

Holder product:



▼ Setup

Description: Posterior Cut

WCS: 1

Stock:

x: 172 mm

y: 83 mm

z: 10 mm

Part:

x: 123.017 mm

y: 43.359 mm

z: 10 mm

Stock lower:

x: -86 mm

y: -41.5 mm

z: 0 mm

Stock upper:

x: 86 mm

y: 41.5 mm

z: 10 mm

▼ Operations

Operation 1/5

Description: Hinge Pockets
Strategy: Pocket 2D
WCS: 1
Tolerance: 0.1 mm
Stock to leave: 0 mm
Maximum stepover: 1.2 mm
Maximum Z: 25 mm
Minimum Z: 4.5 mm

Maximum spindle speed:
10000 rpm
Maximum feedrate:
750 mm/min
Cutting distance: 282.01 mm
Rapid distance: 152.554 mm
Estimated cycle time: 46s
Coolant: Flood
Number: 1
Diameter offset: 1

Length offset: 1
Diameter: 3.175 mm
Length: 24 mm
Number of flutes: 1
Tool type: flat end mill
Tool description:
Default Cutter
Tool product:
Holder product:



Operation 2/5

Description: Rough Scallop
Strategy: Scallop
WCS: 1
Tolerance: 0.01 mm
Radial stock to leave: 0.1 mm
Axial stock to leave: 2 mm
Maximum stepover: 0.8 mm
Maximum Z: 25 mm
Minimum Z: 6.2 mm

Maximum spindle speed:
10000 rpm
Maximum feedrate:
750 mm/min
Cutting distance:
2211.908 mm
Rapid distance: 494.647 mm
Estimated cycle time: 3m 0s
Coolant: Flood
Number: 1
Diameter offset: 1
Length offset: 1

Diameter: 3.175 mm
Length: 24 mm
Number of flutes: 1
Tool type: flat end mill
Tool description:
Default Cutter
Tool product:
Holder product:



Operation 3/5

Description: Fine Scallop
Strategy: Scallop
WCS: 1
Tolerance: 0.01 mm
Stock to leave: 0 mm
Maximum stepover: 0.8 mm
Maximum Z: 25 mm
Minimum Z: 4.2 mm

Maximum spindle speed:
10000 rpm
Maximum feedrate:
750 mm/min
Cutting distance:
2203.135 mm
Rapid distance: 421.597 mm
Estimated cycle time: 2m 58s
Coolant: Flood
Number: 1
Diameter offset: 1

Length offset: 1
Diameter: 3.175 mm
Length: 24 mm
Number of flutes: 1
Tool type: flat end mill
Tool description:
Default Cutter
Tool product:
Holder product:



Operation 4/5

Description: Eyewires	Minimum Z: 0.4 mm	Length offset: 1
Strategy: Contour 2D	Maximum spindle speed:	Diameter: 3.175 mm
WCS: 1	10000 rpm	Length: 24 mm
Tolerance: 0.01 mm	Maximum feedrate:	Number of flutes: 1
Radial stock to leave: 0.1 mm	750 mm/min	Tool type: flat end mill
Axial stock to leave: 0.4 mm	Cutting distance:	Tool description:
Maximum stepdown: 2.5 mm	1038.225 mm	Default Cutter
Maximum stepover: 3.016 mm	Rapid distance: 156.345 mm	Tool product:
Maximum Z: 25 mm	Estimated cycle time: 1m 32s	Holder product:
	Coolant: Flood	
	Number: 1	
	Diameter offset: 1	



Operation 5/5

Description: Perimeter	Minimum Z: 0.4 mm	Length offset: 1
Strategy: Contour 2D	Maximum spindle speed:	Diameter: 3.175 mm
WCS: 1	10000 rpm	Length: 24 mm
Tolerance: 0.01 mm	Maximum feedrate:	Number of flutes: 1
Radial stock to leave: 0.1 mm	750 mm/min	Tool type: flat end mill
Axial stock to leave: 0.4 mm	Cutting distance:	Tool description:
Maximum stepdown: 2.5 mm	1432.914 mm	Default Cutter
Maximum stepover: 3.016 mm	Rapid distance: 65.235 mm	Tool product:
Maximum Z: 25 mm	Estimated cycle time: 1m 59s	Holder product:
	Coolant: Flood	
	Number: 1	
	Diameter offset: 1	

