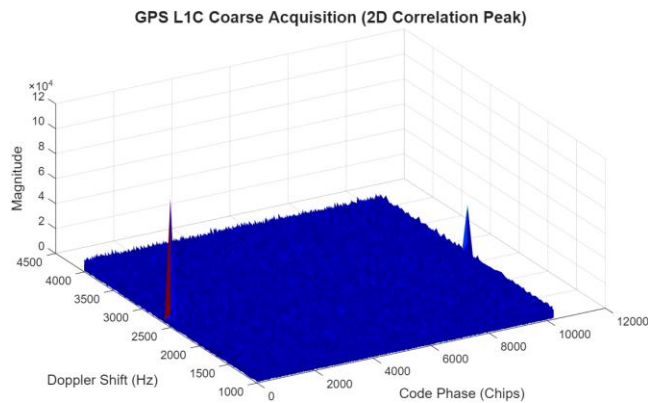
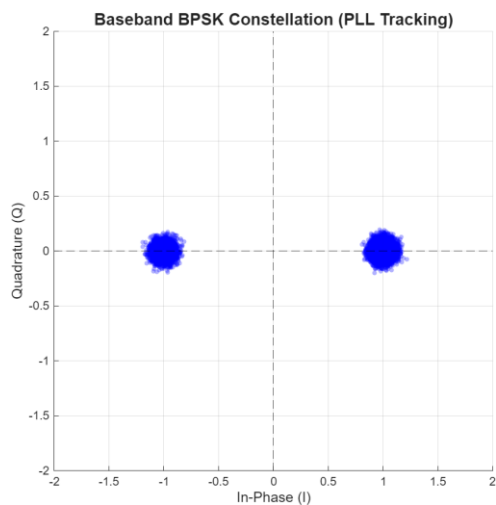

T-PMHC & MT End-to-End Baseband Simulator (GPS L1C)

- [Part 1] Initializing Physical Layer Parameters...
- [Part 2] Generating CNAV-2 Data & Cryptographic Payloads...
- [Part 3] Overriding Subframe s2 (Capacity: 1096 bits/2 Epochs)...
- [Part 4] Simulating AWGN Channel & Signal Acquisition...
- [OK] Signal Acquired! Estimated Doppler: 2505 Hz



- [Part 5] Executing PLL Tracking (18,000 Symbols)...
- [OK] PLL Tracking Locked and Payload Demodulated.



- [Part 6] CNAV-2 Decoding & Subframe Extraction
 - > Validating Subframe 1 (BCH Decoding)...
 - [SUCCESS] Subframe 1 BCH Decoded perfectly. TOI Recovered: 0
 - > Validating Subframe 2 & 3 (LDPC Decoding for 10 Frames)...
 - [SUCCESS] All 10 Frames LDPC decoded successfully (Channel errors overcome).
 - > Evaluating Cryptographic Overriding Capacity & TTFAF:
 - Required MT Payload : 1920 bits
 - Required T-PMHC Payload: 896 bits
 - Available Space (2 Epo): 1096 bits
 - [MT Result] FATAL: MT Payload exceeds capacity. TTFAF delayed to 4 Epochs.
 - [T-PMHC Result] SUCCESS: 896-bit Payload fully recovered within 2 Epochs (180s)!