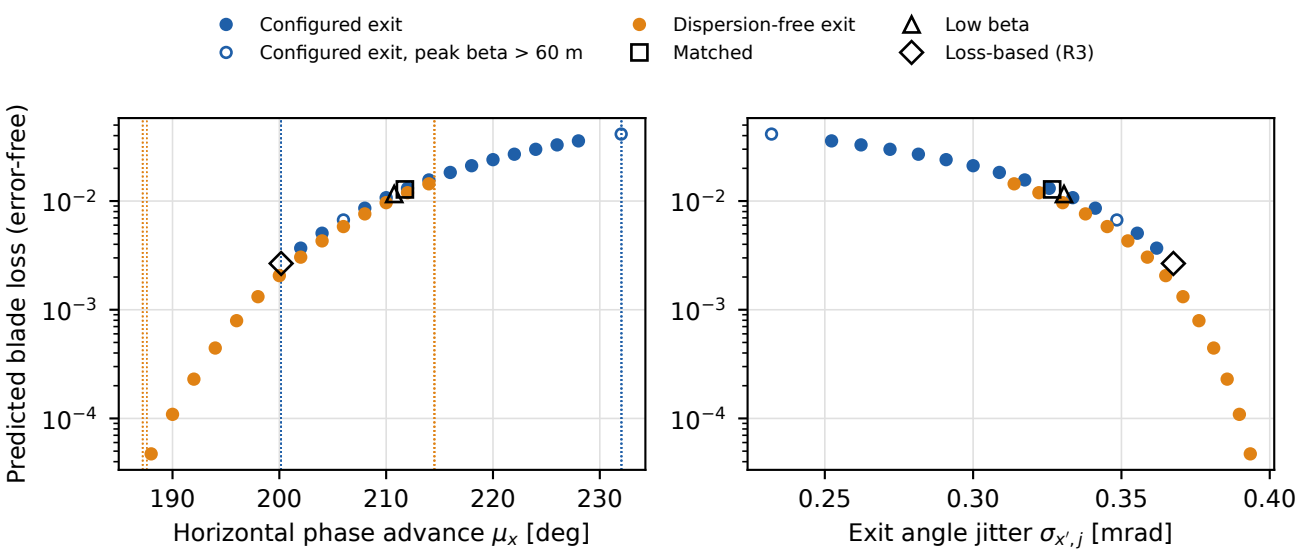
Configured exit
Configured exit, peak beta > 60 m
Dispersion-free exit
Matched
Low beta
Loss-based (R3)
Predicted blade loss (error-free)
10^{-2}
10^{-3}
10^{-4}
190
200
210
220
230
Horizontal phase advance μ_x [deg]
0.25
0.30
0.35
0.40
Exit angle jitter $\sigma_{x',j}$ [mrad]