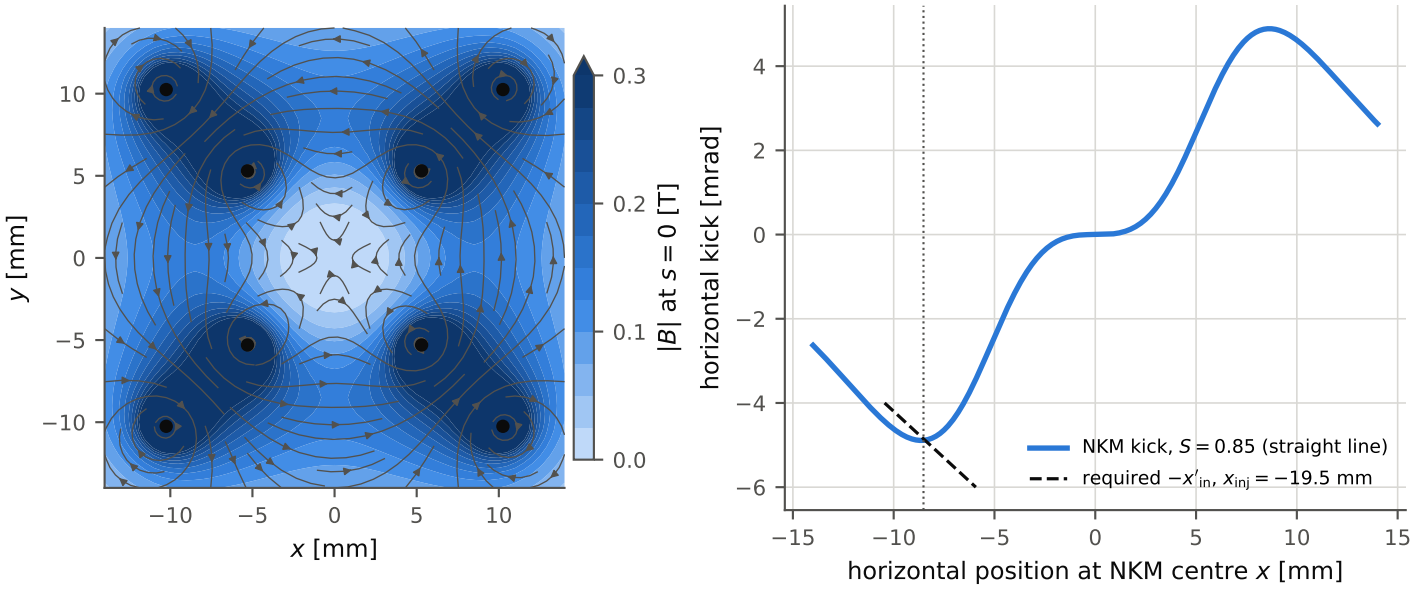

y [mm]
x [mm]
|B| at s = 0 [T]
horizontal kick [mrad]
horizontal position at NKM centre x [mm]
NKM kick, S = 0.85 (straight line)
required −x′in, xinj = −19.5 mm