

SOLUTION
SECTION-I

Single Correct Answer Type **7 Q. [3 M (–1)]**

1. Ans. (D)


Sol. Imagine 3 loops.  

$B = \sqrt{B_0^2 + B_0^2 + B_0^2} = \sqrt{3}\,B_0$ towards F

2. Ans. (A)

Sol. Torque due to magnetic force $|d\vec{\tau}| = \int_0^L (idrB)r = \frac{iL^2B}{2}$

In equilibrium $\frac{iL^2B}{2} = (kx) \times L \sin 30°$ or $x = \frac{5iLB}{8k}$



3. Ans. (C)

Sol. Along y $v_y^2 = 2 \times \frac{qE}{m} \times y$

Net speed = $\sqrt{v^2 + v_y^2}$

4. Ans. (A)

Sol. $B_E - B_P = B_1$ $B_E + B_P = B_2$

$B_E = \frac{B_1 + B_2}{2}$

$B_P = \frac{B_2 - B_1}{2} = \frac{\mu_0 J}{2}$

So answer is = $J\left(\frac{B_1 + B_2}{2}\right)$

5. Ans. (D)


Sol. Current sensitivity = $\frac{NAB}{C}$

6. Ans. (B)

For More Material Join: @JEEAdvanced_2024

7. Ans. (A)

Sol.

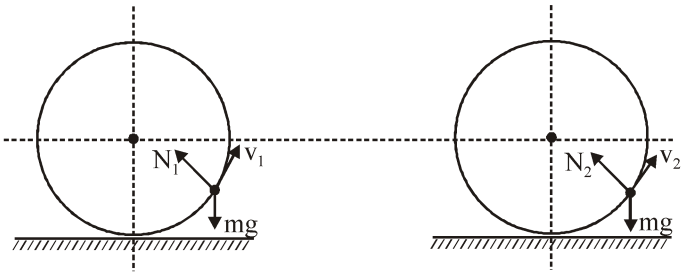

(a) (b)


F.B.D in two cases is as shown in case (b) normal will be less and incase (b) work done by magnetic field is zero so height in two cases will be same.]

Multiple Correct Answer Type

9 Q. [4 M (–1)]

8. Ans. (ABCD)

Sol. Wire segment (1)

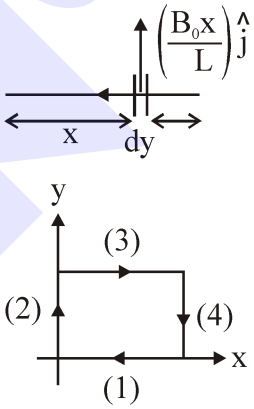

$$(d\vec{f}) = \int_0^L i\,dx\left(\frac{B_0x}{2}\right) = \frac{iB_0L}{2};\ d\vec{f} = \frac{-iB_0L}{2}\hat{k}$$

Similary for $\vec{f}_2 = -\frac{-iB_0L}{2}\hat{k};\ \vec{f}_3 = \frac{iB_0L}{2}\hat{k};\ \vec{f}_4 = \frac{iB_0L}{2}\hat{k}\ \ \vec{f}_n = 0$

If coil is constrained to rotate about y-axis $|\vec{\tau}| = i\left(\frac{B_0L}{2}\right)L = \frac{iAB_0}{2}$

$\Rightarrow$ Similarly for torque about torque has same magnitude

9. Ans. (C,D)

Sol. Current = $\frac{(4q)\omega}{2\pi}$ for each face from which axis is passing

$$B = 2\times\frac{\mu_0 iR^2}{2\left(R^2+x^2\right)^{\frac{3}{2}}} = \frac{2\times\mu_0(4q)\omega\left(\frac{a}{\sqrt{2}}\right)^2}{2\cdot2\pi\left[\left(\frac{a}{\sqrt{2}}\right)^2+\left(\frac{a}{2}\right)^2\right]^{\frac{3}{2}}} = \frac{8\mu_0q\omega}{3\sqrt{3}\pi a}$$

Reversing any of the four charges mass the current either zero or in opposite sense at two surface.

10. Ans. (A, D)


Sol. (A) $\frac{\mu_0K}{2}$ hence $K = \sigma V$

(D) $F = q\vec{u}\times\vec{B}$ hence upwards.

For More Material Join: @JEEAdvanced_2024

11. Ans. (A, B)

Sol.

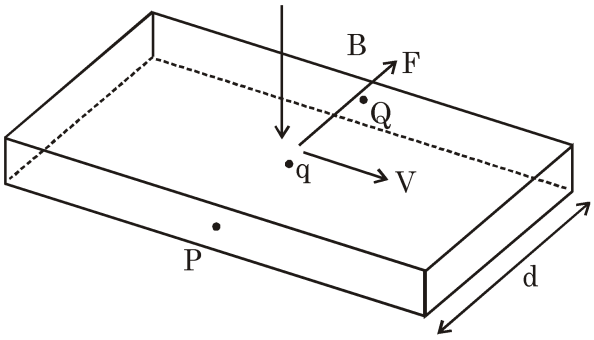

$\therefore$ Charges separate between P & Q


hence potential difference develops between P & Q.

$\Delta V = Ed = v_d Bd$

$\therefore$ if 'B' increases, ΔV increases.

12. Ans. (A,D)

Sol.



$T\cos\theta = mg$ ... (i)

$T\sin\theta + F_B = mw^2 (L\sin\theta)$ .... (ii)

From equation (i) and (ii)

$$\left(\frac{mg}{\cos\theta}\right)\sin\theta + q(\omega L\sin\theta)B$$

$$= m\omega^2 L\sin\theta$$

$$\Rightarrow \quad B = \frac{m\omega}{q} - \frac{mg\sin\theta}{\cos\theta\cdot(\omega L\sin\theta)}$$


$$B = \frac{1}{\beta}\left[\omega - \frac{g}{\omega L\cos\theta}\right], \left(\because \beta = \frac{q}{m}\right)$$

Since torque due to force mg and F_B is not zero about 'O'. Hence angular momentum is not conserved about point of suspension 'O'.

For More Material Join: @JEEAdvanced_2024

13. Ans. (B,C,D)

Sol.

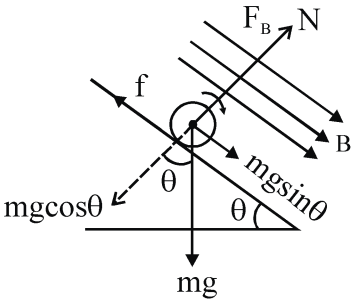

Using $\vec{F}_B = i\left(d\vec{\ell} \times \vec{B}\right)$, we can find direction of F_B, as shown in figure.

for angular velocity 'ω' to be constant,

$\tau_{cm} = 0$

$\Rightarrow$ $f = 0$

$\Rightarrow$ $N = 0$

$\Rightarrow$ $F_B = mg\cos\theta$

Due to component of mg, i.e., mgsinθ

translational velocity will change.

14. Ans. (A,D)

15. Ans. (A, C, D)


Sol. $I\vec{\alpha} = \vec{\tau}$

$\vec{\tau} = \vec{\mu} \times \vec{B}$

$\vec{\mu} = \pi R^2 \times I\left(-\hat{k}\right)$ & $I = \dfrac{MR^2}{2}$

16. Ans. (B,C)

Sol.



$MB\sin\theta = mg\sin\theta \times R$

$B = \dfrac{mg}{\pi iR}$

Linked Comprehension Type (1 Para × 3Q.) (1 Para × 2Q.) [3 M (-1)]
(Single Correct Answer Type)

17. Ans. (D)

Sol. Applying Gauss law, $\dfrac{-ne}{\epsilon_0}\pi r^2\ell = E2\pi rl \Rightarrow \vec{E} = \dfrac{-ner}{2\epsilon_0}\hat{r}$

For More Material Join: @JEEAdvanced_2024

18. Ans. (B)

Sol. Applying Ampere's law : $\oint \vec{B}.d\vec{l} = \mu_0 I$, $B2\pi r = \mu_0 ne\pi r^2 v \Rightarrow B = \frac{\mu_0 ner}{2} v$

19. Ans. (B)

Sol. Net force on electron = $q\vec{E} + q\vec{v} \times \vec{B} = \frac{ne^2 r}{2\,\epsilon_0}\left[1 - \mu_0 \varepsilon_0 v^2\right]\hat{r}$

20. Ans. (D)


Sol. $qv_dB = qE$

$$E = v_d B = \left(\frac{i}{nqA}\right)B = \frac{iB}{nq(YZ)}$$

$$\Delta V_H = E \cdot Y = \frac{iB}{nq(Z)}$$

21. Ans. (A)

Sol.



$$\tan\alpha = \frac{E_2}{E_1} = \frac{E_2}{\left(\frac{J}{\sigma}\right)} = \frac{\left(\frac{iB}{nqA}\right)}{\frac{J}{\sigma}} = \frac{B\sigma}{nq}$$


SECTION-II

Numerical Answer Type Question **2Q.[3M (0)]**

(upto second decimal place)

22. Ans. 216.00

Sol. Energy stored permit length = $\frac{B^2}{2\mu_0} \times \pi\left(r_1^2 - r_2^2\right)$



23. Ans.160.00

Sol. $r = \frac{mv}{qB} = \frac{\sqrt{2mK}}{eB}$

For More Material Join: @JEEAdvanced_2024

$$0.75 = \frac{\sqrt{2\times16\times10^{-27}\times8\times10^{6}\times1.6\times10^{-19}}}{1.6\times10^{-19}\times B}$$


$$\Rightarrow B = \frac{4}{7.5} \text{ so } 300B = 160 \text{ T}$$

SECTION-III

Numerical Grid Type (Ranging from 0 to 9) **4 Q. [4 M (0)]**

24. Ans. 3

Sol.

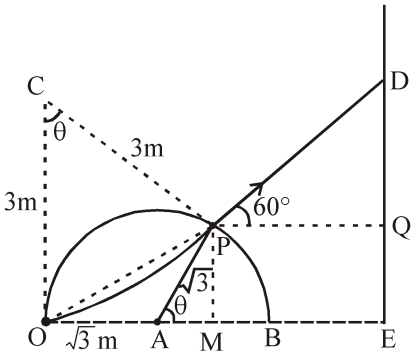

Considering the upper half of the area

Radius of paticle is circular motion $R = \frac{mv}{qB} = \frac{(2\times10^{-3})(0.3)}{(1\times10^{-3})\times0.2} = 3$ m

Radius of circular arc, $r = \sqrt{3}$ m

from ΔCOP tand ΔOAP

$$OP = 2\times3\times\sin\frac{\theta}{2} = 2\times\sqrt{3}\sin\left(\frac{180-\theta}{2}\right)$$

$$\Rightarrow \tan\left(\frac{\theta}{2}\right) = \frac{1}{\sqrt{3}} \Rightarrow \theta = 60°$$

From, ΔAPM,

$$PM = \sqrt{3}\sin 60° = \frac{3}{2} = \theta E$$

$$AM = \sqrt{3}\cos 60° = \frac{\sqrt{3}}{2}$$

From diagram,

$$PQ = ME = \sqrt{3} + \frac{\sqrt{3}}{2} = \frac{3\sqrt{3}}{2}$$

From ΔPQD,

For More Material Join: @JEEAdvanced_2024

$$\tan 60° = \frac{DQ}{PQ} \Rightarrow DQ = \sqrt{3} \times \frac{3\sqrt{3}}{2} = \frac{9}{2}m$$

$$\therefore DE = QE + DQ = \frac{3}{2} + \frac{9}{2} = 6m$$


Similarlly we can get, from lower half

$\therefore$ Distance between the points where charges will strike after deflection = 6 + 6 = 12m = 4x

$\Rightarrow x = 3$

25. Ans. 9

Sol.

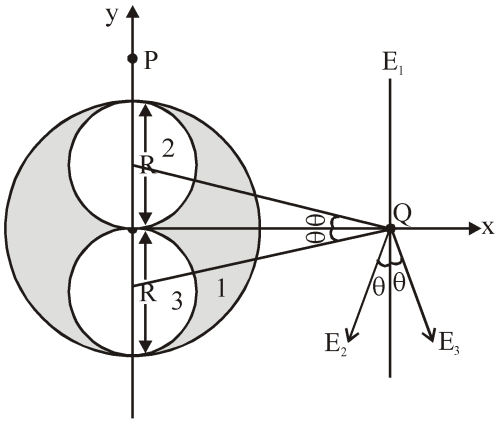

$$\tan\theta = \frac{R}{2R} = \frac{1}{2}$$

Assume hollow cylinders as current density $\pm J$ and find E_1,E_2 & E_3 individually finally add all of them

26. Ans. 5

Sol. $\oint B \cdot d\vec{\ell} = \mu_0 i_{net}$

$$B \times 2\pi r = \mu_0 \int_a^r \left(J_0 \frac{r}{a} \right) 2\pi r^2 dr$$

27. Ans. 1

Sol : Consider unit length of cylinder charge = $\sigma 2\pi R \times 1$

time = $2\pi/\omega$

$$\text{So} \quad ni = \frac{2\pi R\sigma\omega}{2\pi} = \sigma R\omega$$

Now $B = \mu_0 ni$

$B = \mu_0 \sigma R\omega$

SECTION-IV

Matrix Match Type (4 × 5) **1 Q. [8 M (for each entry +2(0)]**


28. Ans. (A) P,S; (B) Q,T,R; (C) Q,T,R; (D) P

Subjective Type **2 Q. [4 M (0)]**

29. Ans. (i) $u = \sqrt{\frac{2eV_0}{m_e}}$, (ii) $\frac{2b m_e u_0}{e(b^2 - a^2)}$

For More Material Join: @JEEAdvanced_2024

Sol.




(i) From work-energy theorem between inner and outer cylinder.

$$eV = \frac{1}{2}m_e v^2$$

$$\Rightarrow v = \sqrt{\frac{2eV}{m_e}}$$

(b) From figure

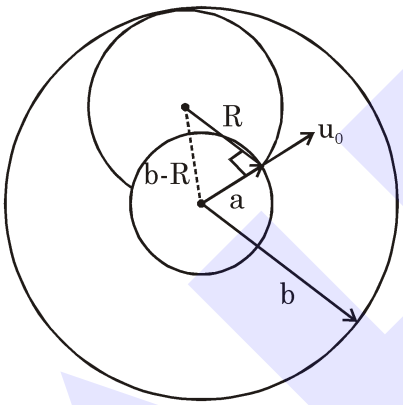

$$R^2 + a^2 = (b - R)^2$$

$$\Rightarrow R^2 + a^2 = b^2 + R^2 - 2bR$$

$$\Rightarrow R = \frac{b^2 - a^2}{2b} \quad \text{... (i)}$$

Also, $R = \frac{m_e u_0}{eB_C}$ ... (ii)

From (i) and (ii)

$$\frac{b^2 - a^2}{2b} = \frac{m_e u_0}{eB_C} \Rightarrow B_C = \frac{2m_e b u_0}{e\left(b^2 - a^2\right)}$$

For More Material Join: @JEEAdvanced_2024

30. **Ans.** dBQ_0

Sol. $IdB = m\frac{dv}{dt}$

$dB(Idt) = mdv$

$\Rightarrow dB\int_0^{Q_0} Idt = m\int_0^{v} dv$

$\Rightarrow dBQ_0 = mv$

For More Material Join: @JEEAdvanced_2024