Electrical / Electronics Test Equipment

INNOTECH
We will make innovations.

MLCC (Multilayer Ceramic Capacitor)

Feature

MLCC Test Equipment for simulating temperature and voltage conditions to evaluate drying, sintering, and device reliability during production.



Specifications

Internal Dimension (mm)		500 × 520 × 820 (W×D×H)
Operating Range	Temp.	20°C ~ 105°C
	Humi.	30% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 2%
Option		CE Certification Host Communication Custom Option (Made-to-Order)

Auto-Clave

Feature

Equipment for bubble removal in film lamination and defoaming processes for LCD, OLED, Semiconductors, and Home appliances.



Specifications

Internal Dimension (mm)		550 × 690 × 475 (W×D×H)
Operating Range	Temp.	50°C ~ 250°C
	press.	20 kgf/cm² (Max.)
Uniformity	Temp.	± 3°C
Option		CE Certification Host Communication Custom Option (Made-to-Order)

Semiconductor Test Equipment

Feature

Equipment for testing the long-term reliability of semiconductor products (SSD, DRAM, etc.) under environmental conditions such as High/Low temperatures.







Specifications

		SQL (NAND Test)	E-SSD	D-RAM Aging
Internal Dimension (mm)		719 × 727 × 417 (W×D×H)	1,100 × 500 × 1,420 (W×D×H)	1,800 × 1,400 × 1,144 (W×D×H)
Operating Range	Temp.	-50°C ~ 135°C	-40°C ~ 125°C	-10°C ~ 90°C
Uniformity	Temp.	± 3°C (Loaded) / ± 1.5°C (Unloaded)	± 2°C	± 2°C
Option		CE Certification Host Communication Custom Option (Made-to-Order)		

Software Technology

INNOTECH
We will make innovations.

Smart CMS System

Integrated monitoring system that provides real-time equipment status
by site and equipment, and tracks overall site utilization and operating rates.



Detail Information	Operation Status	Predictive Maintenance
Site-based equipment operation status	Equipment operation status (RUN, STOP, ERROR)	PM status monitoring (NORMAL, CAUTION, REPAIR)

Predictive Maintenance System

Equipment diagnostic solution that monitors vibration, noise, temperature, voltage, and current to predict equipment condition and enable immediate maintenance when anomalies are detected.







Function	
	Condition-Based Monitoring
	Fault Detection and Predictive Maintenance Actions
	Real-time data collection from equipment such as vibration, temperature, and current signals

Integrated Diagnostic UI Software

Real-time integrated precision monitoring of four sensors (Including Microscope, OCT, Load cell precision sensor, and Laser displacement sensor) on a single screen.

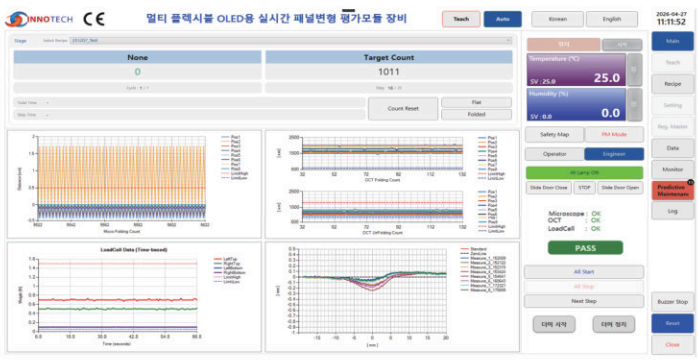

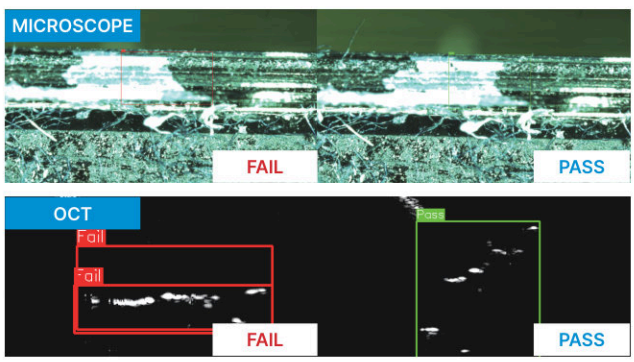



2013

Company Established

2015

Patent Granted for Foldable Display Reliability Test Equipment Foldable Display

2017

Developed Domestic Altitude Test Chamber Technology

2020

Awarded the $1 Million Export Tower
Selected as a Promising Export SME

2021

Selected as a Specialized Materials, Parts and Equipment Company
Established Branch Office (Giheung)

2022

Relocated Headquarters (Asan Smart Valley Industrial Complex)
Awarded the $3 Million Export Tower Selected as a Promising SME in Chungcheongnam-do
National Productivity Award (Grand Prize, Leadership Category)

2024

Established Vietnam Subsidiary Awarded the $5 Million Export Tower

2025

Presidential Commendation for Management Innovation
Listed on KOSDAQ
Awarded the $10 Million Export Tower

2026

Selected as a KODIT Top 50 ESG Company

RELIABILITY 고신뢰성 | **PRECISION** 정밀성 | **INNOVATION** 혁신 | **GLOBAL** 글로벌

INNO TECH **INNOTECH**
We will make innovations.

Reliability Test Equipment

INNOTECH
We will make innovations.

Standardized Chamber

Feature

Standardized Environmental Reliability Test Equipment for durability evaluation of Displays, Semiconductors, Secondary batteries, and various Materials & Components under High/Low temperature & High humidity conditions.

Specifications

Internal Dimension (mm)		1,000 × 800 × 1,000 (W×D×H)
Operating Range	Temp.	-40°C ~ 100°C
	Humi.	20% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Host Communication PD Sensor (Luminance Measurement) Custom Option (Made-to-Order)



Feature

Environmental Reliability Test Equipment for durability testing of Mobile and IT OLED display Panels, Materials, and Components under High/Low temperature and High temperature & humidity conditions.







Specifications

		1 ZONE	2 ZONE	4 ZONE
Internal Dimension (mm)		1,200 × 1,000 × 1,400 (W×D×H)	890 × 1,140 × 1,850 (W×D×H)	1,000 × 1,000 × 800 (W×D×H)
Operating Range	Temp.	-40°C ~ 100°C		
	Humi.	30% ~ 98%		
Uniformity	Temp.	± 2°C		
	Humi.	± 3%		
Option		CE Certification Host Communication PD Sensor (Luminance Measurement) Custom Option (Made-to-Order)		

Reliability Test Equipment

INNOTECH
We will make innovations.

Condensation Test Chamber

Feature

Environmental Test Equipment for evaluating surface condensation on display panels and products exposed to Sub-zero conditions after High temperature & humidity storage.



Specifications

Internal Dimension (mm)		1,235 × 800 × 1,160 (W×D×H)
Operating Range (2 Functions)	Low Temp Room	
	Temp.	-40°C ~ 100°C
	Temp/humi Room	
	Temp.	+25°C ~ 100°C
	Humi.	30% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Host Communication PD Sensor (Luminance Measurement) Custom Option (Made-to-Order)

Combined Vibration Chamber

Feature

Combined Vibration Chamber for reliability evaluation under simulated transportation and operating conditions. It combines vibration (random/sine) and temperature/humidity testing to evaluate resonance, fatigue, and structural stability.



Specifications

Internal Dimension (mm)		1,000 × 1,000 × 1,000 (W×D×H)
Operating Range	Temp.	-70°C ~ 150°C
	Humi.	25% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Host Communication Custom Option (Made-to-Order)

Image Retention Chamber

Feature

Equipment for automatic inspection of image retention (burn-in) and temporary afterimage in OLED/LCD Displays under High/Low temperature reliability conditions.



Specifications

Internal Dimension (mm)		1,700 × 1,010 × 1,400 (W×D×H)
Operating Range	Temp.	-40°C ~ 85°C
	Humi.	25% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Spectroradiometric Measurement System (Lumi Top) Custom Option (Made-to-Order)

Flexible/Slidable Display Test Equipment

INNOTECH
We will make innovations.

Display Shear Deformation Chamber

Feature

Environmental reliability analysis system for real-time precision measurement of layer-by-layer shear deformation in flexible display panels during Folding & Sliding operations.



Specifications

Internal Dimension (mm)		1,380 × 1,266 × 680 (W×D×H)
Operating Range	Temp.	-40°C ~ 100°C
	Humi.	30% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Host Communication Shear Deformation Measurement System Custom Option (Made-to-Order)

Multi-Folding(8 Sheets)

Feature

Multi-purpose combined reliability folding evaluation system for testing tri-fold and similar products under environmental reliability conditions.



Specifications

Internal Dimension (mm)		3,300 × 1,050 × 1,700 (W×D×H)
Operating Range	Temp.	-40°C ~ 100°C
	Humi.	30% ~ 98%
Uniformity	Temp.	± 2°C
	Humi.	± 3%
Option		CE Certification Host Communication Macro Vision Systems Custom Option (Made-to-Order)

Feature

Equipment for evaluating the mechanical folding durability of foldable display panels under various environmental conditions.







Specifications

		1 ZONE(8 Sheets)	2 ZONE(16 Sheets)	Ambient-Temperature Slidable Chamber
Internal Dimension (mm)		1,380 × 1,266 × 680 (W×D×H)	1,380 × 760 × 680 (W×D×H)	800 × 1,556 × 1,820 (W×D×H)
Operating Range	Temp.	-40°C ~ 100°C		Ambient Temperature
	Humi.	30% ~ 98%		
Uniformity	Temp.	± 2°C		
	Humi.	± 3%		
Max. Folding Speed		2.1Hz		2.1Hz
Option		CE Certification Host Communication 4-Inspection Systems Custom Option (Made-to-Order)		CE Certification Host Communication Crease Profiling Systems Custom Option (Made-to-Order)