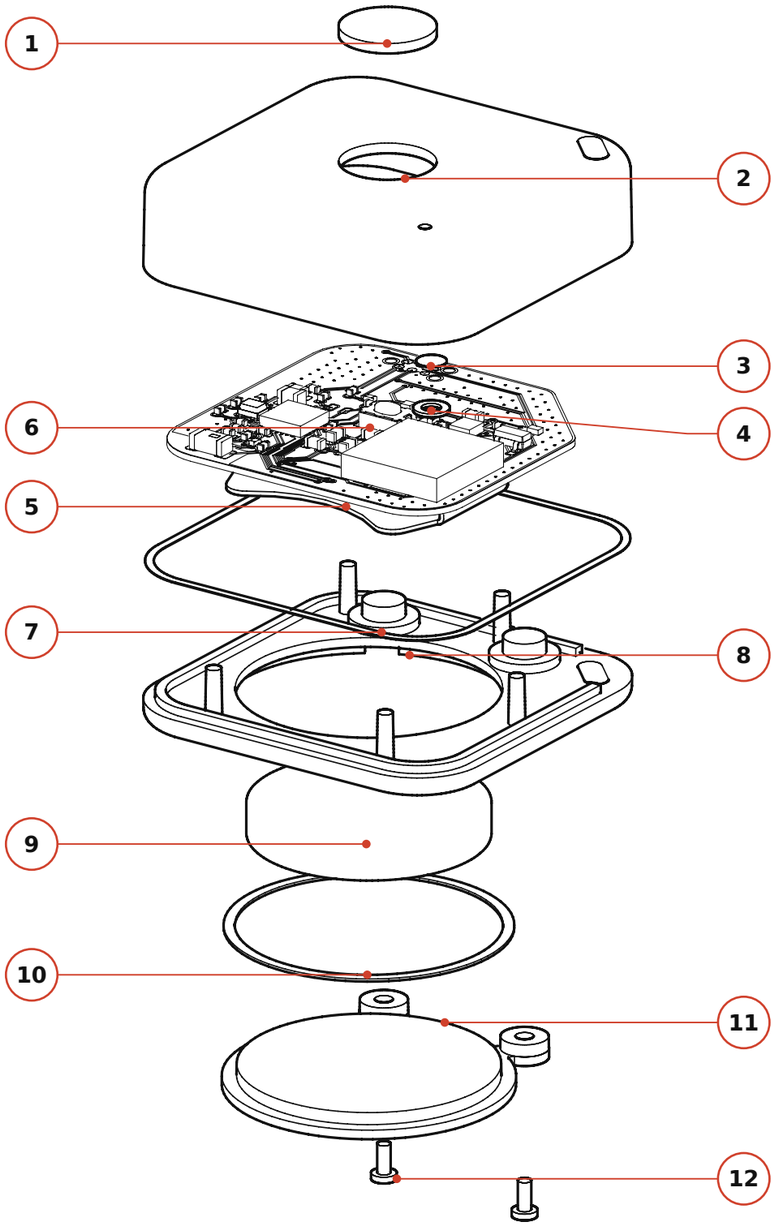


BILL OF MATERIALS

Item	Description	Specification	Qty
1	**Button**	TPU 80A translucent, 2-shot molded into the shell; light path for status LED D1; envelope 8.0 × 8.0 × 1.1 mm	1
2	**Front shell**	PC/ABS, injection molded, 0.9 mm wall, 1° draft, R6 corners; vertical keyring slot 2.0 × 5.0 mm through the +X+Y corner; Ø1.0 sound hole; envelope 32.0 × 32.0 × 8.1 mm	1
3	**Acoustic vent**	ePTFE membrane, die-cut Ø2.5, PSA backed, over the sound hole; envelope 2.5 × 2.5 × 0.1 mm	1
4	**Port gasket**	Soft PU foam, die-cut 3.0 × 3.0, 0.8 mm free height; seals the LS1 top port to the shell; envelope 3.0 × 3.0 × 0.3 mm	1
5	**CR2032 retainer**	Keystone 3034TR, SMD, on the PCBA back side (LCSC C5213768); envelope 23.2 × 16.4 × 4.0 mm	1
6	**Main board (PCBA)**	FR4 4 layers, 0.6 mm, ENIG, black mask; CC2340R52 BLE SoC, PAM8904 + CPT-9019A sounder; JLCPCB assembly; envelope 28.4 × 28.4 × 2.7 mm	1
7	**PSA ring**	Die-cut acrylic PSA, 0.10 mm; bonds the back plate to the shell; envelope 31.7 × 31.7 × 0.1 mm	1
8	**Back plate**	PC/ABS, shell color, injection molded; 2 blind screw bosses; laser-marked regulatory text; envelope 32.0 × 32.0 × 6.0 mm	1
9	**Coin cell**	CR2032 lithium 3 V, Ø20.0 × 3.2 mm (Panasonic CR2032); user replaceable; envelope 20.0 × 20.0 × 3.2 mm	1
10	**Door gasket**	Silicone 50A, flat die-cut, 0.23 mm compressed; IP67 face seal; envelope 23.7 × 23.7 × 0.2 mm	1
11	**Cell door**	PC/ABS, shell color; tool-secured per UL 4200A; laser-marked warning icons; envelope 26.1 × 24.0 × 1.9 mm	1
12	**Captive screw**	Thread-forming 1.4 × 3 mm, stainless A2, captive in the door	2

Pocket Beacon · EVT-0 · A

Exploded isometric view · assembly for quotation

Overall size	Scale	Units
32 × 32 × 10 mm	**2:1 (A3)**	**mm**
Revision	Date	Sheet
EVT-0 · A	**2026-11-08**	**1/1**

Hidden lines removed. Electronic parts shown as manufacturer 3D envelopes. Reference dimensions in mm; general tolerances ISO 2768-f unless stated.