Joinpack



AUTO STRAPPING MACHINE


THE SUM OF ALL SOLUTIONS

MATRIX Concept

THE SUM OF ALL SOLUTIONS FOR STRAPPING

Based on over 40 years of professional experience and fully understand the long-standing plights which customers are facing due to the diverse market needs, Joinpack create the unique Matrix concept and implement this advanced idea to all its automatic strapping machine products.

One fundamental infrastructure fit with specialized components or motors to perform universal functions then further constitute a complete functional Matrix to corresponding with various market demands at lowest cost.

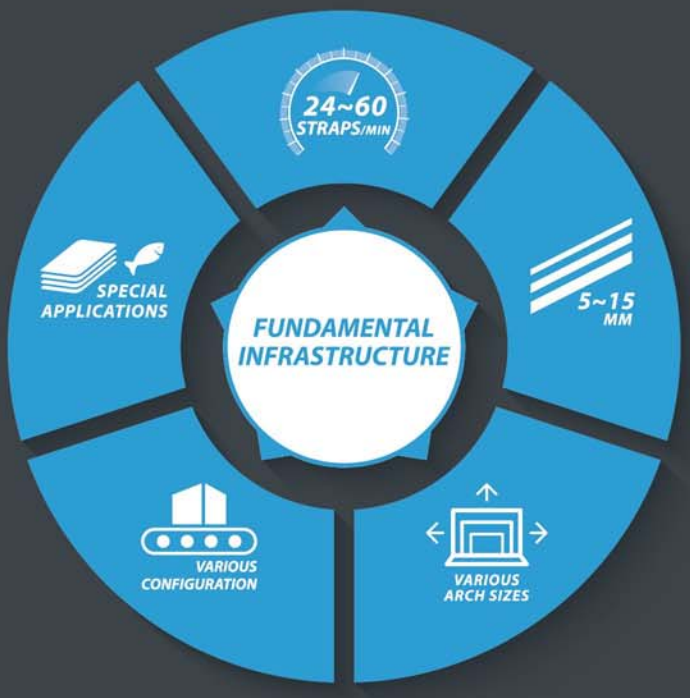

- ☑ VARIOUS SPEED
- ☑ VARIOUS ARCH SIZES
- ☑ VARIOUS STRAP WIDTHS
- ☑ IN-LINE/STAINLESS STEEL CONFIGURATION
- ☑ SPECIAL APPLICATION

ADVANTAGES & CHARACTERISTICS



- Meet various speeds/strap widths/budgets



- Less maintenance cost



- Less parts stock
- Up to 70% parts interchangeable

Models / Specs	A 8 SERIES		A 9 SERIES	
	A-88	A-85	A-98	A-93
Speed (straps/min)	60	38	32	24
Motor type	SERVO	AC	SERVO	AC
Strap width (mm)	5 , 6 , 9 , 12 , 15		9 , 12 , 15	
Tension range (kgs)	3 ~ 70		15 ~ 70	

A 8 Series

To integrate compatible, flexible and affordable, A 8 series strapping system is designed with variety of strapping speed, full range of in & off-line, belt & roller driven. Diversity of options is available.



A-88ND
Closed Cabinet



A-88NM / A-85NM
Stainless Steel Housing



A-88NYP Side Seal
& Top Press



A-88N / A-85N
Standard



A-88NLAR
In-Line Roller Driven
Low Table



A-88NAB / A-85NAB
In-Line Belt Driven

FEATURES

- Advanced strapping performance
- Run on 5,6,9,12,15 mm strap
- Waist auto loading system
- Short feeding sensor
- Coil end eject system
- Looping ejector
- Flat working table (N/ND)
- Photocell activation (ND)
- Front foot bar switch (ND)

BELT / ROLLER DRIVEN

- PLC control with HMI
- Conveyor speed adjustable
- Belt (AB) / Roller (AR) driven
- Upstream and downstream interlock

A 9 Series

Provide the flexibility, reliability and
simplify maintenance for general applications.
By adopting servo driven, speed is faster and efficiency higher.



A-98 / A-93 Standard



A-98M / A-93M
Stainless Steel Housing



A-98YMT / A-93YMT
Stainless Steel Housing
With Roller Table



S-72YO
Mobile Pallet Strapping

FEATURES

- Run on 9,12,15 mm strap
- Digital regulator in PCB
- Various arch sizes
- Diversity of options



A-98AB / A-93AB
In-Line Belt Driven



A-98AR / A-93AR
In-Line Roller Driven



A-98LAR / A-93LAR
In-Line Roller Driven
Low Table



A-98Y / A-93Y
Side Seal

BELT / ROLLER DRIVEN

- PLC control
- Conveyor speed adjustable
- Upstream and downstream interlock



A-88NCS
3-sided Bundle Squaring
and Strapping System



A-88NARP / A-85NARP
In-Line Roller Driven
& Top Press



CS1
3 Sides Squaring Machine
Side Squaring & Backstop



CS4
4 Sides Squaring Machine
Side Squaring, Backstop & Rear Push

SPECIFICATIONS

Specs \ Models	A 8 SERIES		A 9 SERIES	
	A-88	A-85	A-98	A-93
Speed (straps / min) (650 x 500 Arch)	60	38	32	24
Strap width 5,6 mm (specified)	Standard			
Strap width 9,12,15 mm (specified)	Standard			
Tension range for 5,6 mm (kgs)	3~30			
Tension range for 9,12,15 mm (kgs)	5~70		15~70	
Arch (STD) mm	W 650 x H 500		W 850 x H 600	
Motor type	SERVO	AC	SERVO / AC	AC
Sealing method	Heating element			
Auto loading system	Standard		Options	
Short feeding system	Standard			Options
Looping ejector	Standard		Options	
Coil end eject system	Standard		Options	
Electronic tension control	Standard		Options	
Table height (mm)	805			
Power supply	110/220/230/240V, 50/60Hz, 1PH 220/230/380/415/440V, 50/60Hz, 3PH			
Power consumption (KW)	1.2			1.0
Layout dimension (L x W x H) (STD) mm	1230 x 580 x 1430		1440 x 600 x 1530	
Side Seal - Y	Standard			
Low Table - L	Standard			
Roller Driven - AR	Standard			
Belt Driven - AB	Standard			
Arch (STD) mm	AR : W 850 x H 500 (SERVO / AC) AB : W 850 x H 500 (AC) AB : W 650 x H 500 (SERVO)		W 850 x H 600	
HMI touch panel (AR / AB)	Standard		Options	
Roller / Belt speed (m / min)	20 ~ 40 adjustable			
Min. packaging size (mm)	AR : W 160 x L 200 x H 30 AB : W 100 x L 200 x H 30 AB : W 160 x L 130 x H 30		AR : W 350 x L 250 x H 30 AR : W 250 x L 350 x H 30 AB : W 250 x L 200 x H 30	
Various arch sizes	Options			
Stainless Steel Housing - M	Options			
Top Press - P	Options			

* Specifications subject to change without notice

Joinpack
WE PACK PROMISES

JIA-IN INDUSTRY CO., LTD.
T +886 4 2359 4966
F +886 4 2359 2449
E info@joinpack.com
www.joinpack.com

TÜVNORD ISO 9001

CE

2026.03.12.V2