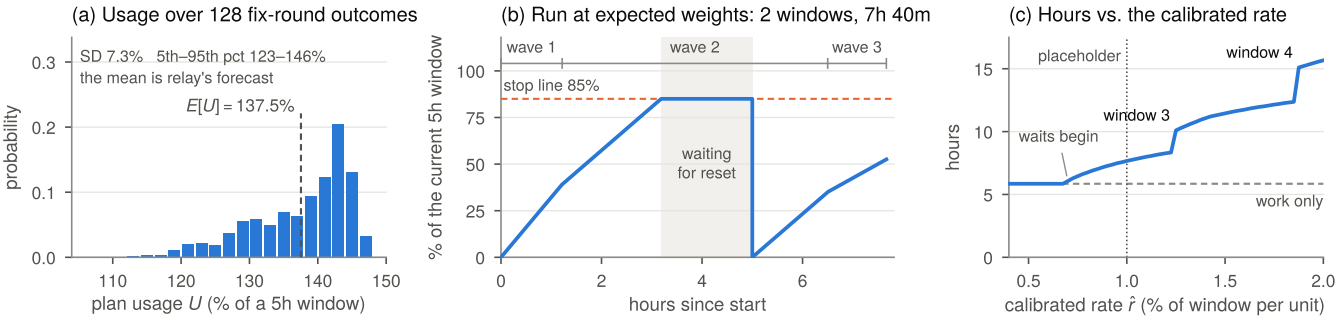
(a) Usage over 128 fix-round outcomes
SD 7.3% 5th–95th pct 123–146%
the mean is relay's forecast
E[U] = 137.5%
probability
0.3
0.2
0.1
0.0
110
120
130
140
150
plan usage U (% of a 5h window)
(b) Run at expected weights: 2 windows, 7h 40m
wave 1
wave 2
wave 3
stop line 85%
waiting
for reset
% of the current 5h window
100
75
50
25
0
0
2
4
6
hours since start
(c) Hours vs. the calibrated rate
placeholder
window 4
window 3
waits begin
work only
hours
15
10
5
0
0.5
1.0
1.5
2.0
calibrated rate r̂ (% of window per unit)