

# KA1M0565R/KA1H0565R

## Fairchild Power Switch(FPS)

### Features

- Precision fixed operating frequency
- KA1M0565R (67KHz),KA1H0565R (100KHz)
- Pulse by pulse over current limiting
- Over load protection
- Over voltage protection (Min. 23V)
- Internal thermal shutdown function
- Under voltage lockout
- Internal high voltage sense FET
- Auto restart

### Description


The Fairchild Power Switch(FPS) product family is specially designed for an off-line SMPS with minimal external components. The Fairchild Power Switch(FPS) consist of high voltage power SenseFET and current mode PWM controller IC. PWM controller features integrated fixed oscillator, under voltage lock out, leading edge blanking, optimized gate turn-on/turn-off driver, thermal shut down protection, over voltage protection, temperature compensated precision current sources for loop compensation and fault protection circuit. compared to discrete MOSFET and controller or RCC switching converter solution, a Fairchild Power Switch(FPS) can reduce total component count, design size, weight and at the same time increase & efficiency, productivity, and system reliability. It has a basic platform well suited for cost effective design in either a flyback converter or a forward converter.

TO-220F-4L

1

1. GND 2. DRAIN 3. VCC 4. FB

### Internal Block Diagram

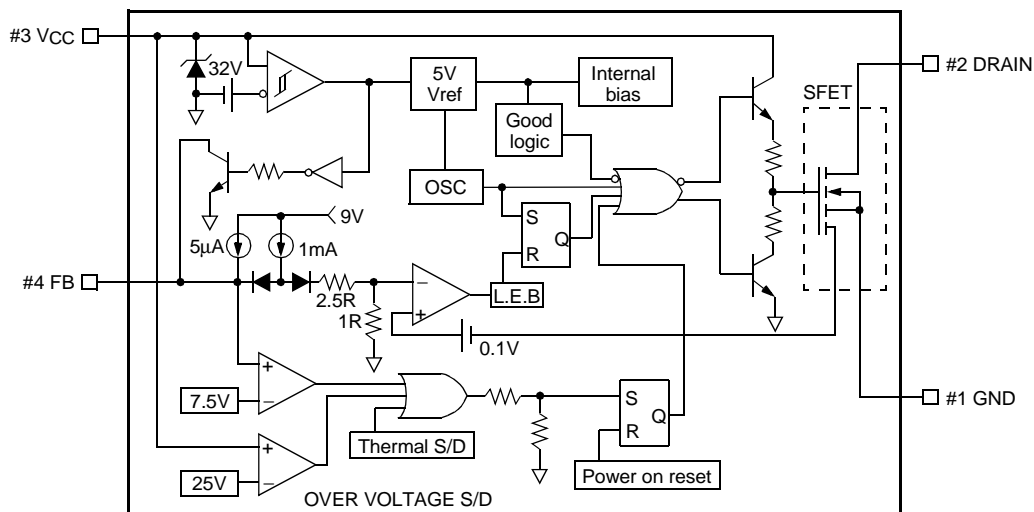

Rev.1.0.2

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Maximum Drain voltage <sup>(1)</sup>	V <sub>D,MAX</sub>	650	V
Drain Gate voltage (R <sub>GS</sub> =1MΩ)	V <sub>DGR</sub>	650	V
Gate-source (GND) voltage	V <sub>GS</sub>	±30	V
Drain current pulsed <sup>(2)</sup>	I <sub>DM</sub>	20	ADC
Single pulsed avalanche energy <sup>(3)</sup>	E <sub>AS</sub>	230	mJ
Continuous drain current (T <sub>C</sub> =25°C)	I <sub>D</sub>	5.0	ADC
Continuous drain current (T <sub>C</sub> =100°C)	I <sub>D</sub>	3.5	ADC
Maximum Supply voltage	V <sub>CC,MAX</sub>	30	V
Input voltage range	V <sub>FB</sub>	−0.3 to V <sub>SD</sub>	V
Total power dissipation	P <sub>D</sub>	140	W
	Derating	1.11	W/°C
Operating ambient temperature	T <sub>A</sub>	−25 to +85	°C
Storage temperature	T <sub>STG</sub>	−55 to +150	°C

### Notes:

1. T<sub>j</sub>=25°C to 150°C
2. Repetitive rating: Pulse width limited by maximum junction temperature
3. L=30mH, V<sub>DD</sub>=50V, R<sub>G</sub>= 27Ω, starting T<sub>j</sub>=25°C

## Electrical Characteristics (SFET part)

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain source breakdown voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =50μA	650	-	-	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =Max., Rating, V <sub>GS</sub> =0V	-	-	50	μA
		V <sub>DS</sub> =0.8Max., Rating, V <sub>GS</sub> =0V, T <sub>C</sub> =125°C	-	-	200	μA
Static drain source on resistance <sup>(note)</sup>	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =2.5A	-	1.76	2.2	Ω
Forward transconductance <sup>(note)</sup>	g <sub>fs</sub>	V <sub>DS</sub> =50V, I <sub>D</sub> =2.5A	2.5	-	-	S
Input capacitance	C <sub>iss</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =25V, f=1MHz	-	1457	-	pF
Output capacitance	C <sub>oss</sub>		-	130	-	
Reverse transfer capacitance	C <sub>rss</sub>		-	38.8	-	
Turn on delay time	t <sub>d(on)</sub>	V <sub>DD</sub> =0.5BV <sub>DSS</sub> , I <sub>D</sub> =5.0A (MOSFET switching time are essentially independent of operating temperature)	-	-	60	nS
Rise time	t <sub>r</sub>		-	-	150	
Turn off delay time	t <sub>d(off)</sub>		-	-	300	
Fall time	t <sub>f</sub>		-	-	130	
Total gate charge (gate-source+gate-drain)	Q <sub>g</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =5.0A, V <sub>DS</sub> =0.5BV <sub>DSS</sub> (MOSFET switching time are essentially independent of operating temperature)	-	-	56	nC
Gate source charge	Q <sub>gs</sub>		-	10.3	-	
Gate drain (Miller) charge	Q <sub>gd</sub>		-	22.3	-	

### Note:

Pulse test: Pulse width ≤ 300μs, duty cycle ≤ 2%

$$S = \frac{1}{R}$$

## Electrical Characteristics (CONTROL part)

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
UVLO SECTION						
Start threshold voltage	VSTART	-	14	15	16	V
Stop threshold voltage	VSTOP	After turn on	9	10	11	V
OSCILLATOR SECTION						
Initial accuracy	FOSC	KA1M0565R	61	67	73	kHz
		KA1H0565R	90	100	110	
Frequency change with temperature <sup>(2)</sup>	ΔF/ΔT	−25°C ≤ Ta ≤ +85°C	-	±5	±10	%
Maximum duty cycle	Dmax	KA1M0565R	74	77	80	%
		KA1H0565R	64	67	70	
FEEDBACK SECTION						
Feedback source current	IFB	Ta=25°C, 0V ≤ Vfb ≤ 3V	0.7	0.9	1.1	mA
Shutdown Feedback voltage	VSD	-	6.9	7.5	8.1	V
Shutdown delay current	Idelay	Ta=25°C, 5V ≤ Vfb ≤ VSD	4.0	5.0	6.0	μA
REFERENCE SECTION						
Output voltage <sup>(1)</sup>	Vref	Ta=25°C	4.80	5.00	5.20	V
Temperature Stability <sup>(1)(2)</sup>	Vref/ΔT	−25°C ≤ Ta ≤ +85°C	-	0.3	0.6	mV/°C
CURRENT LIMIT (SELF-PROTECTION) SECTION						
Peak Current Limit	I <sub>OVER</sub>	Max. inductor current	3.08	3.5	3.92	A
PROTECTION SECTION						
Thermal shutdown temperature (Tj) <sup>(1)</sup>	TSD	-	140	160	-	°C
Over voltage protection voltage	VOVP	-	23	25	28	V
TOTAL DEVICE SECTION						
Start Up current	I <sub>START</sub>	V <sub>CC</sub> =14V	0.1	0.3	0.4	mA
Operating supply current (control part only)	I <sub>OP</sub>	Ta=25°C	6	12	18	mA
V <sub>CC</sub> zener voltage	V <sub>Z</sub>	I <sub>CC</sub> =20mA	30	32.5	35	V

**Note:**

1. These parameters, although guaranteed, are not 100% tested in production
2. These parameters, although guaranteed, are tested in EDS (wafer test) process

## Typical Performance Characteristics

(These characteristic graphs are normalized at  $T_a=25^{\circ}\text{C}$ )

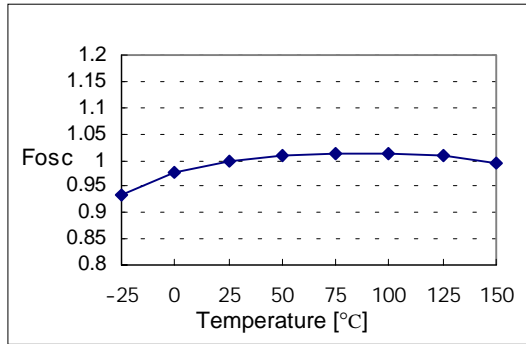


Figure 1. Operating Frequency

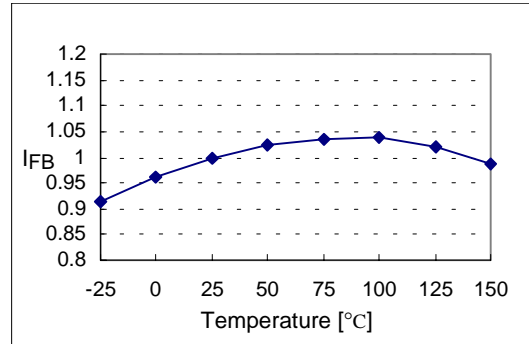


Figure 2. Feedback Source Current

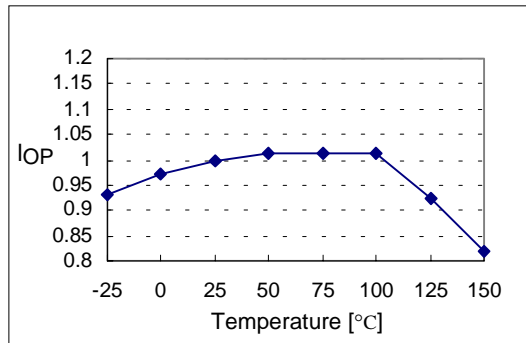


Figure 3. Operating Supply Current

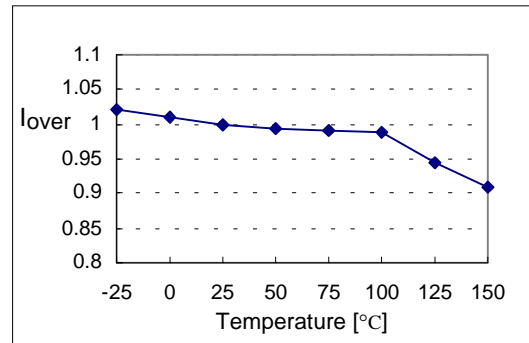


Figure 4. Peak Current Limit

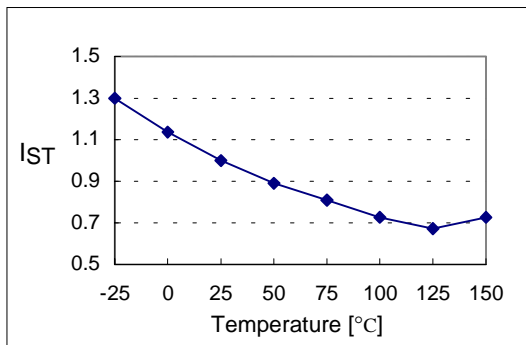


Figure 5. Start up Current

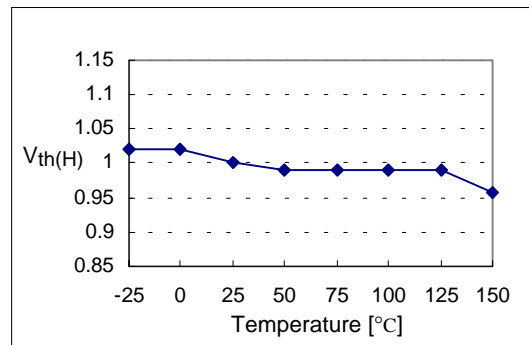


Figure 6. Start Threshold Voltage

## Typical Performance Characteristics (Continued)

(These characteristic graphs are normalized at  $T_a=25^{\circ}\text{C}$ )

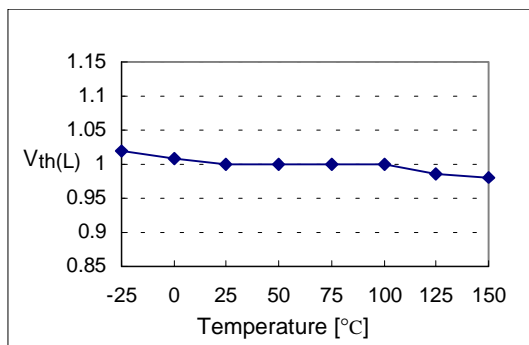


Figure 7. Stop Threshold Voltage

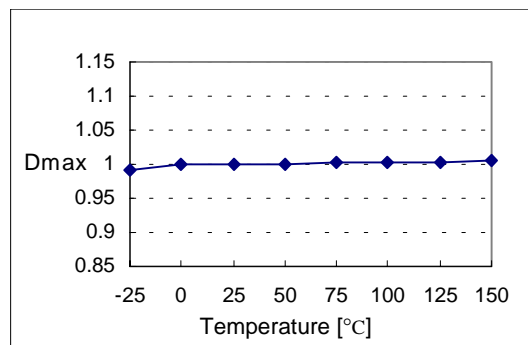


Figure 8. Maximum Duty Cycle

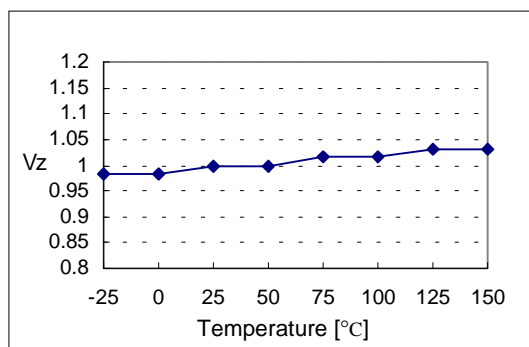


Figure 9. VCC Zener Voltage

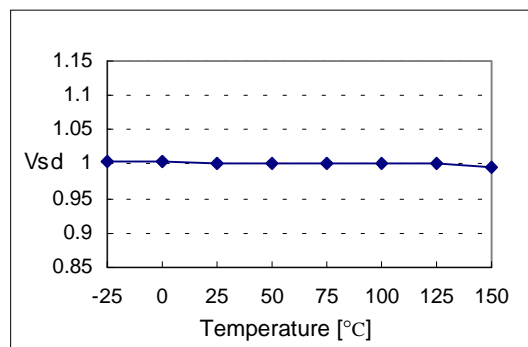


Figure 10. Shutdown Feedback Voltage

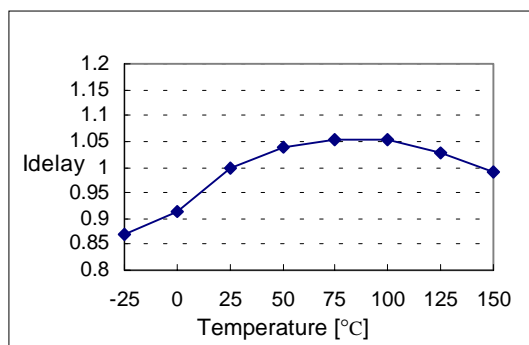


Figure 11. Shutdown Delay Current

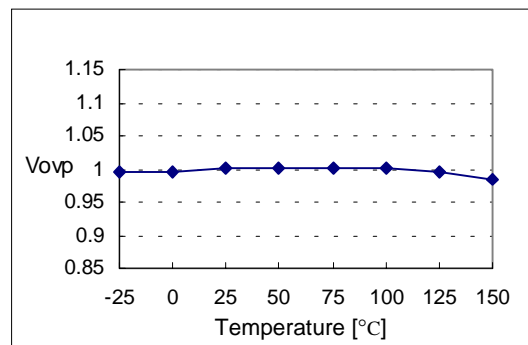
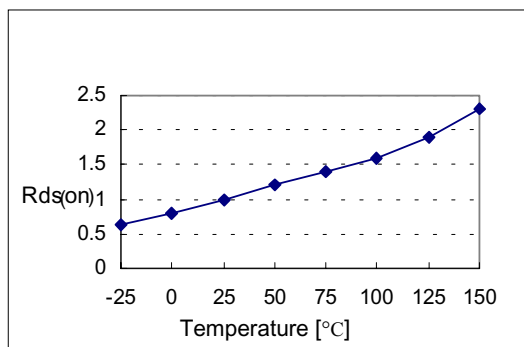


Figure 12. Over Voltage Protection

## Typical Performance Characteristics (Continued)

(These characteristic graphs are normalized at  $T_a=25^{\circ}\text{C}$ )



**Figure 13. Static Drain-Source on Resistance**





Technical drawing of the 2.54TYP connector, showing dimensions in millimeters (mm).

**Front View (Left):**

- Overall width:  $10.00 \pm 0.20$
- Top hole diameter:  $\varnothing 3.20 \pm 0.20$
- Distance from top edge to top hole center:  $3.40 \pm 0.10$
- Distance from top hole center to side hole center:  $(5.00)$
- Overall height:  $15.60 \pm 0.20$
- Distance from bottom edge to top of main body:  $(1.80)$
- Distance from bottom edge to top of pin area:  $5.00 \pm 0.30$
- Pin pitch:  $2.54 \text{ TYP}$  ( $[2.54 \pm 0.25]$ )
- Pin dimensions:
  - Pin #1:  $3-1.05 \text{ MIN}$
  - Pin #2:  $3-1.30 \text{ MAX}$
  - Pin #3:  $1.25 \text{ MIN}$
  - Pin #4:  $1.50 \text{ MAX}$
- Pin #1 position:  $0.60 \pm 0.10$
- Pin #2 position:  $(1.19)$
- Pin #3 position:  $(7.62)$
- Pin #4 position:  $(1.19)$

**Side View (Right):**

- Overall width:  $4.50 \pm 0.20$
- Distance from top edge to top of main body:  $6.50 \pm 0.20$
- Distance from top of main body to top of pin area:  $15.70 \pm 0.20$
- Distance from top of pin area to top of pin:  $5.00 \pm 0.30$
- Pin #1 position:  $3.18 \pm 0.30$
- Pin #2 position:  $1.50 \pm 0.10$
- Pin #3 position:  $0.50^{+0.10}_{-0.05}$
- Pin #4 position:  $(1.00)$
- Pin #5 position:  $(1.00)$
- Pin #6 position:  $(1.00)$
- Pin #7 position:  $(1.00)$
- Pin #8 position:  $(1.00)$
- Pin #9 position:  $(1.00)$
- Pin #10 position:  $(1.00)$
- Pin #11 position:  $(1.00)$
- Pin #12 position:  $(1.00)$
- Pin #13 position:  $(1.00)$
- Pin #14 position:  $(1.00)$
- Pin #15 position:  $(1.00)$
- Pin #16 position:  $(1.00)$
- Pin #17 position:  $(1.00)$
- Pin #18 position:  $(1.00)$
- Pin #19 position:  $(1.00)$
- Pin #20 position:  $(1.00)$
- Pin #21 position:  $(1.00)$
- Pin #22 position:  $(1.00)$
- Pin #23 position:  $(1.00)$
- Pin #24 position:  $(1.00)$
- Pin #25 position:  $(1.00)$
- Pin #26 position:  $(1.00)$
- Pin #27 position:  $(1.00)$
- Pin #28 position:  $(1.00)$
- Pin #29 position:  $(1.00)$
- Pin #30 position:  $(1.00)$
- Pin #31 position:  $(1.00)$
- Pin #32 position:  $(1.00)$
- Pin #33 position:  $(1.00)$
- Pin #34 position:  $(1.00)$
- Pin #35 position:  $(1.00)$
- Pin #36 position:  $(1.00)$
- Pin #37 position:  $(1.00)$
- Pin #38 position:  $(1.00)$
- Pin #39 position:  $(1.00)$
- Pin #40 position:  $(1.00)$
- Pin #41 position:  $(1.00)$
- Pin #42 position:  $(1.00)$
- Pin #43 position:  $(1.00)$
- Pin #44 position:  $(1.00)$
- Pin #45 position:  $(1.00)$
- Pin #46 position:  $(1.00)$
- Pin #47 position:  $(1.00)$
- Pin #48 position:  $(1.00)$
- Pin #49 position:  $(1.00)$
- Pin #50 position:  $(1.00)$
- Pin #51 position:  $(1.00)$
- Pin #52 position:  $(1.00)$
- Pin #53 position:  $(1.00)$
- Pin #54 position:  $(1.00)$
- Pin #55 position:  $(1.00)$
- Pin #56 position:  $(1.00)$
- Pin #57 position:  $(1.00)$
- Pin #58 position:  $(1.00)$
- Pin #59 position:  $(1.00)$
- Pin #60 position:  $(1.00)$
- Pin #61 position:  $(1.00)$
- Pin #62 position:  $(1.00)$
- Pin #63 position:  $(1.00)$
- Pin #64 position:  $(1.00)$
- Pin #65 position:  $(1.00)$
- Pin #66 position:  $(1.00)$
- Pin #67 position:  $(1.00)$
- Pin #68 position:  $(1.00)$
- Pin #69 position:  $(1.00)$
- Pin #70 position:  $(1.00)$
- Pin #71 position:  $(1.00)$
- Pin #72 position:  $(1.00)$
- Pin #73 position:  $(1.00)$
- Pin #74 position:  $(1.00)$
- Pin #75 position:  $(1.00)$
- Pin #76 position:  $(1.00)$
- Pin #77 position:  $(1.00)$
- Pin #78 position:  $(1.00)$
- Pin #79 position:  $(1.00)$
- Pin #80 position:  $(1.00)$
- Pin #81 position:  $(1.00)$
- Pin #82 position:  $(1.00)$
- Pin #83 position:  $(1.00)$
- Pin #84 position:  $(1.00)$
- Pin #85 position:  $(1.00)$
- Pin #86 position:  $(1.00)$
- Pin #87 position:  $(1.00)$
- Pin #88 position:  $(1.00)$
- Pin #89 position:  $(1.00)$
- Pin #90 position:  $(1.00)$
- Pin #91 position:  $(1.00)$
- Pin #92 position:  $(1.00)$
- Pin #93 position:  $(1.00)$
- Pin #94 position:  $(1.00)$
- Pin #95 position:  $(1.00)$
- Pin #96 position:  $(1.00)$
- Pin #97 position:  $(1.00)$
- Pin #98 position:  $(1.00)$
- Pin #99 position:  $(1.00)$
- Pin #100 position:  $(1.00)$
- Pin #101 position:  $(1.00)$
- Pin #102 position:  $(1.00)$
- Pin #103 position:  $(1.00)$
- Pin #104 position:  $(1.00)$
- Pin #105 position:  $(1.00)$
- Pin #106 position:  $(1.00)$
- Pin #107 position:  $(1.00)$
- Pin #108 position:  $(1.00)$
- Pin #109 position:  $(1.00)$
- Pin #110 position:  $(1.00)$
- Pin #111 position:  $(1.00)$
- Pin #112 position:  $(1.00)$
- Pin #113 position:  $(1.00)$
- Pin #114 position:  $(1.00)$
- Pin #115 position:  $(1.00)$
- Pin #116 position:  $(1.00)$
- Pin #117 position:  $(1.00)$
- Pin #118 position:  $(1.00)$
- Pin #119 position:  $(1.00)$
- Pin #120 position:  $(1.00)$
- Pin #121 position:  $(1.00)$
- Pin #122 position:  $(1.00)$
- Pin #123 position:  $(1.00)$
- Pin #124 position:  $(1.00)$
- Pin #125 position:  $(1.00)$
- Pin #126 position:  $(1.00)$
- Pin #127 position:  $(1.00)$
- Pin #128 position:  $(1.00)$
- Pin #129 position:  $(1.00)$
- Pin #130 position:  $(1.00)$
- Pin #131 position:  $(1.00)$
- Pin #132 position:  $(1.00)$
- Pin #133 position:  $(1.00)$
- Pin #134 position:  $(1.00)$
- Pin #135 position:  $(1.00)$
- Pin #136 position:  $(1.00)$
- Pin #137 position:  $(1.00)$
- Pin #138 position:  $(1.00)$
- Pin #139 position:  $(1.00)$
- Pin #140 position:  $(1.00)$
- Pin #141 position:  $(1.00)$
- Pin #142 position:  $(1.00)$
- Pin #143 position:  $(1.00)$
- Pin #144 position:  $(1.00)$
- Pin #145 position:  $(1.00)$
- Pin #146 position:  $(1.00)$
- Pin #147 position:  $(1.00)$
- Pin #148 position:  $(1.00)$
- Pin #149 position:  $(1.00)$
- Pin #150 position:  $(1.00)$
- Pin #151 position:  $(1.00)$
- Pin #152 position:  $(1.00)$
- Pin #153 position:  $(1.00)$
- Pin #154 position:  $(1.00)$
- Pin #155 position:  $(1.00)$
- Pin #156 position:  $(1.00)$
- Pin #157 position:  $(1.00)$
- Pin #158 position:  $(1.00)$
- Pin #159 position:  $(1.00)$
- Pin #160 position:  $(1.00)$

## Ordering Information

Product Number	Package	Rating	Fosc
KA1M0565R-TU	TO-220F-4L	650V, 5A	67kHz
KA1M0565R-YDTU	TO-220F-4L(Forming)		
KA1H0565R-TU	TO-220F-4L	650V, 5A	100kHz
KA1H0565R-YDTU	TO-220F-4L(Forming)		

TU : Non Forming Type

YDTU : Forming Type

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.