
Perspective settings for product rendering
Style Guide

PureLink


Settings for our standard perspectives of all the products for 3D visualizations.

1. Camera Settings:
Orthographic perspective

2. Top View
The camera is aligned frontally to the product and then rotated -40 degrees to the left. The rotation point of the camera is in the center of the product.

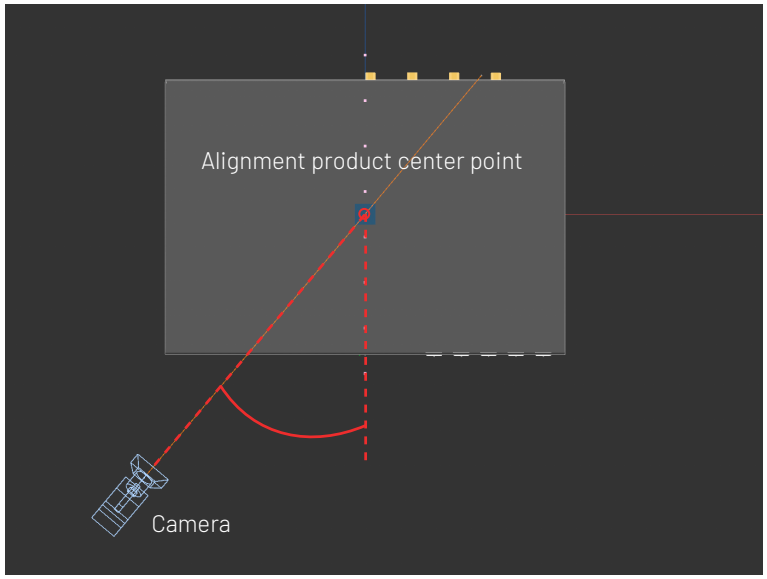

3. Side View
After the camera has been rotated by -40 degrees, it is rotated upwards by -22.3 degrees so that the product is shown slightly from above.

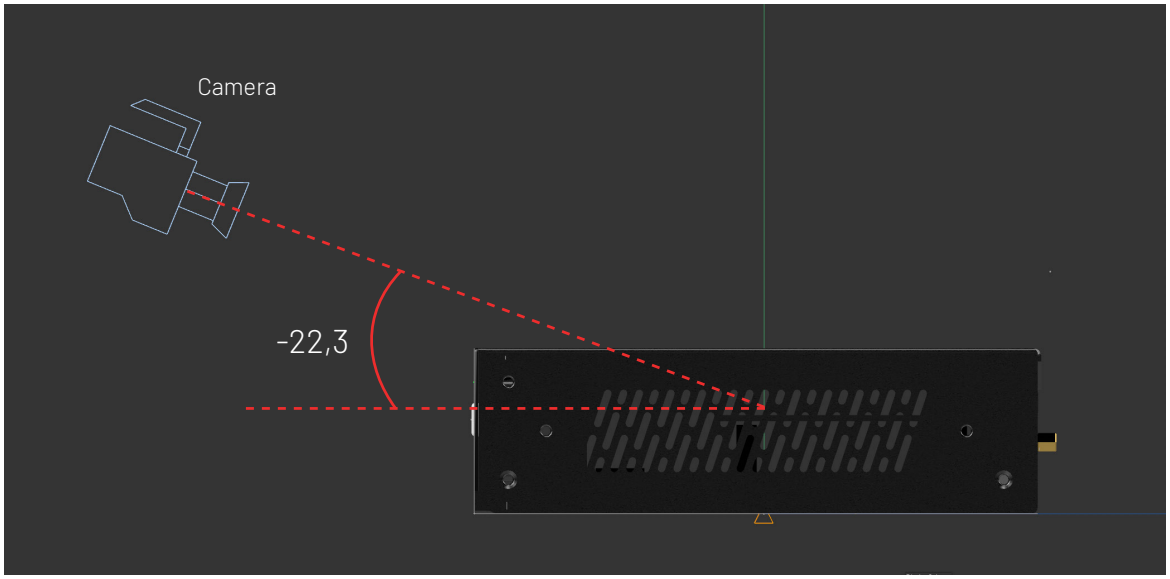



This is the final camera perspective.

Overview of our standard images for single units.


1. Orthographic perspective of front- and backside of each product.




2. Two of the same product are stacked on top of each other, the upper unit is pushed back with the front facing the viewer. The lower unit shows the backside.



3. Shows the front- and backside in a frontal view. The views are described as 'Front' and 'Back'.

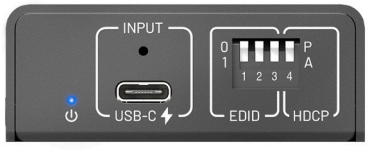

FRONT

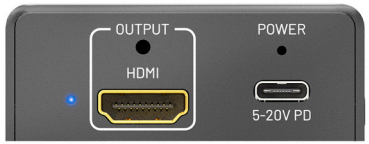

BACK

Naming the images.

4. The images must be saved and named in a specific order.
The word 'ITEM' is a placeholder and must be replaced with the correct item number.



File name: Item_REN_01



File name: Item_REN_02



File name: Item_REN_03



FRONT



BACK

File name: Item_REN_04

Perspective settings for product rendering
Style Guide

PureLink

Overview of our standard images for device pairs (TX&RX).

1. Orthographic perspective of front- and backside of each product.






2. Two of the same product are stacked on top of each other, the upper unit is pushed back with the front facing the viewer. The lower unit shows the backside.





3. TX and RX shown in a picture with the front side. In the second picture, TX and RX are shown with the back side





Overview of our standard images for device pairs (TX&RX).


4 Shows the front- and backside in a frontal view. The views are described as 'Front' and 'Back'. Depending on the context, the devices may also be referred to as 'TRANSMITTER' or 'RECEIVER'.




FRONT



RECEIVER BACK



FRONT

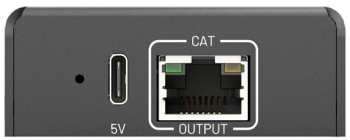

TRANSMITTER BACK

Overview of our standard images for device pairs (TX&RX). Naming conventions for images, using the TX as an example.

5 The images must be saved and named in a specific order. The word 'ITEM' is a placeholder and must be replaced with the correct item number.

File name: Item_TX_REN_01



File name: Item_TX_REN_02



File name: Item_TX_REN_03



File name: Item_TX_RX_REN_04



File name: Item_TX_RX_REN_05



File name: Item_TX_REN_06



Perspective settings for product rendering
Style Guide

PureLink

Overview of the standard images for the main unit and receiver.

1. Orthographic perspective of front- and backside of each product.






2. Two of the same product are stacked on top of each other, the upper unit is pushed back with the front facing the viewer. The lower unit shows the backside.




3. If the product is shipped as a pair of devices, an additional pair of pictures is required. Stacked on top of each other, showing front side and rear side together. If one device is smaller than the other, the smaller device must sit directly in the middle of the second device.




4 Shows the front- and backside in a frontal view. The views are described as 'Front' and 'Back'. Depending on the context, the devices may also be referred to as 'MAIN UNIT" and 'RECEIVER'.



FRONT



BACK

MAIN UNIT



FRONT



BACK

RECEIVER

Image filenames

5 The images must be saved and named in a specific order. The word 'ITEM' is a placeholder and must be replaced with the correct item number.



ITEM_REN_01



ITEM_REN_02



ITEM_REN_03



ITEM_REN_04



ITEM_REN_05



FRONT



BACK

MAIN UNIT

ITEM_REN_06


Export settings of the rendered images.


1. Resolution: 4000px X 4000px
   Format:
   JPEG -> RGB, Colorprofile: Adobe RGB (1998), 8Bit, 72 DPI, no transparencies
   TIFF -> CMYK, Colorprofile: Coated FOGRA39 (ISO 12647-2:2004), 8Bit, 72 DPI, no transparencies
   TIFF -> CMYK, Colorprofile: Coated FOGRA39 (ISO 12647-2:2004), 8Bit, 72 DPI, with transparencies
   TIFF -> RGB, Colorprofile: Adobe RGB (1998), 8Bit, 72 DPI, with transparencies

   We definitely need:
   TIFF -> RGB, Colorprofile: Adobe RGB (1998), 8Bit, 72 DPI, with transparencies and shadow

Settings for the image crop and shadows

1. The image has a protective border of 300px all around it, with a total image size of 4000px X 4000px. The image must fill the entire area up to this border. This is also the case with the front and rear views

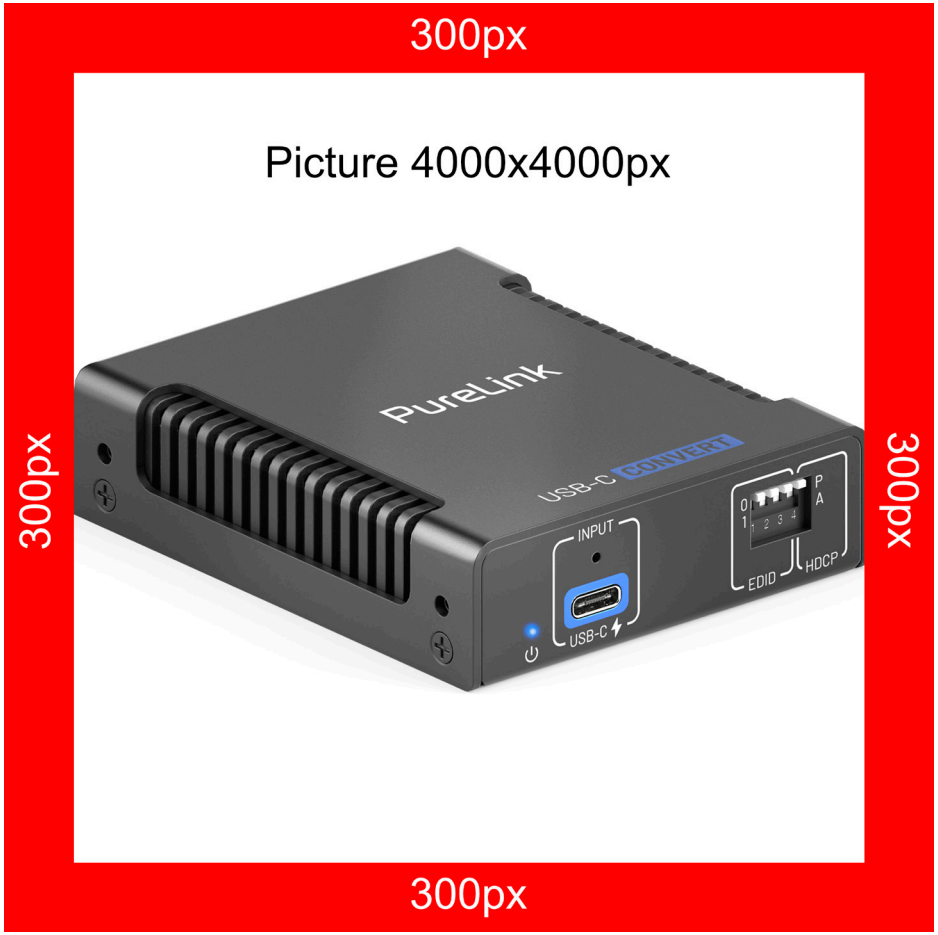

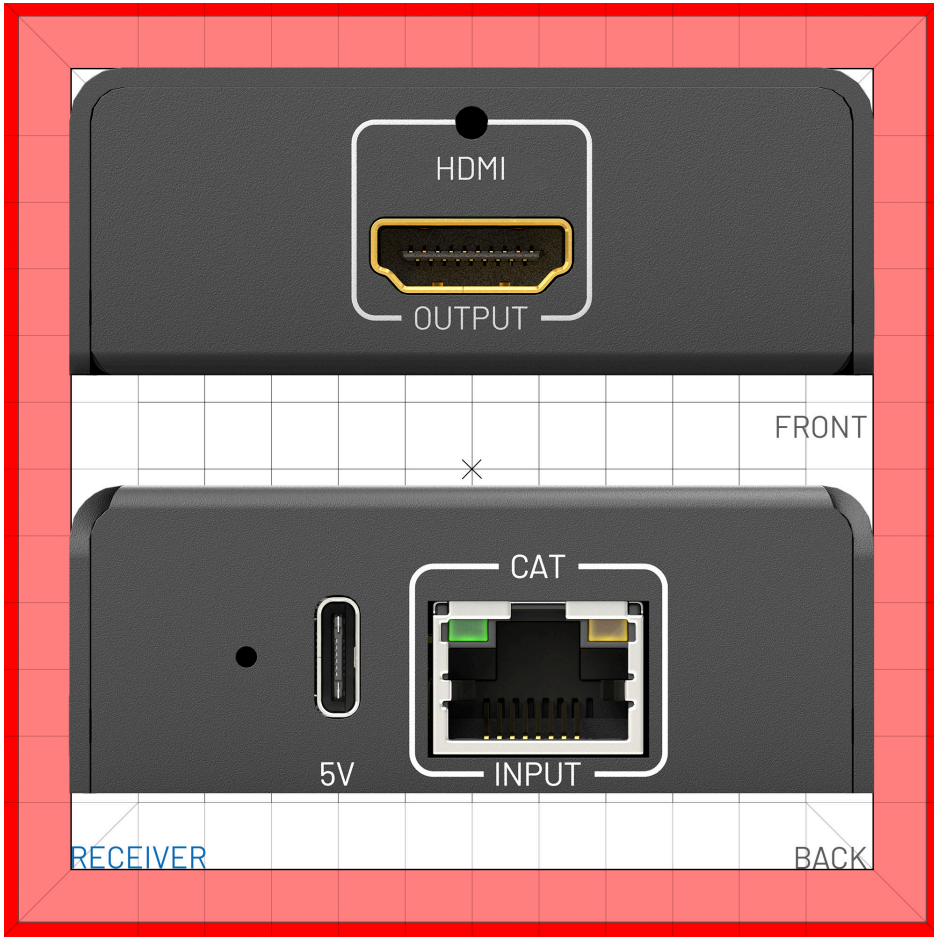

Settings for the image crop and shadows

2 That's a bad example, the shadow extends right to the edge of the image.



X

3 That's a good example, the shadow fades away before reaching the edge of the image.



✓

Settings for the image crop and shadows

4 The shadow shouldn't be too strong in the image, here's an example of how it should look.

