PureLink

PureTools Enclosure *Styleguide.*

Version 1.0

Table of Content

New Design	3
Enclosure sizes	5
Detailed overview small size	7
Detailed overview	12
medium size	12
Detailed overview	17
large size	17
Mounting	23
Matrix	25

New Design

The new PureTools devices differ in terms of their housing design and a new silk print layout. The new design has rounded corners on the top and new cooling elements on the sides. The silk print is more uniform and tidier.

Old:



New:



Enclosure sizes

The new PureTools cases are available in three different sizes: **small, medium and large**.

The cases differ in terms of both their dimensions and their cooling system.

Small | Enclosure height 23mm, width 50mm-209mm



Medium | Enclosure height 30mm, width 210mm-400mm




Large | Enclosure height 44mm




Detailed overview small size

Housing cover

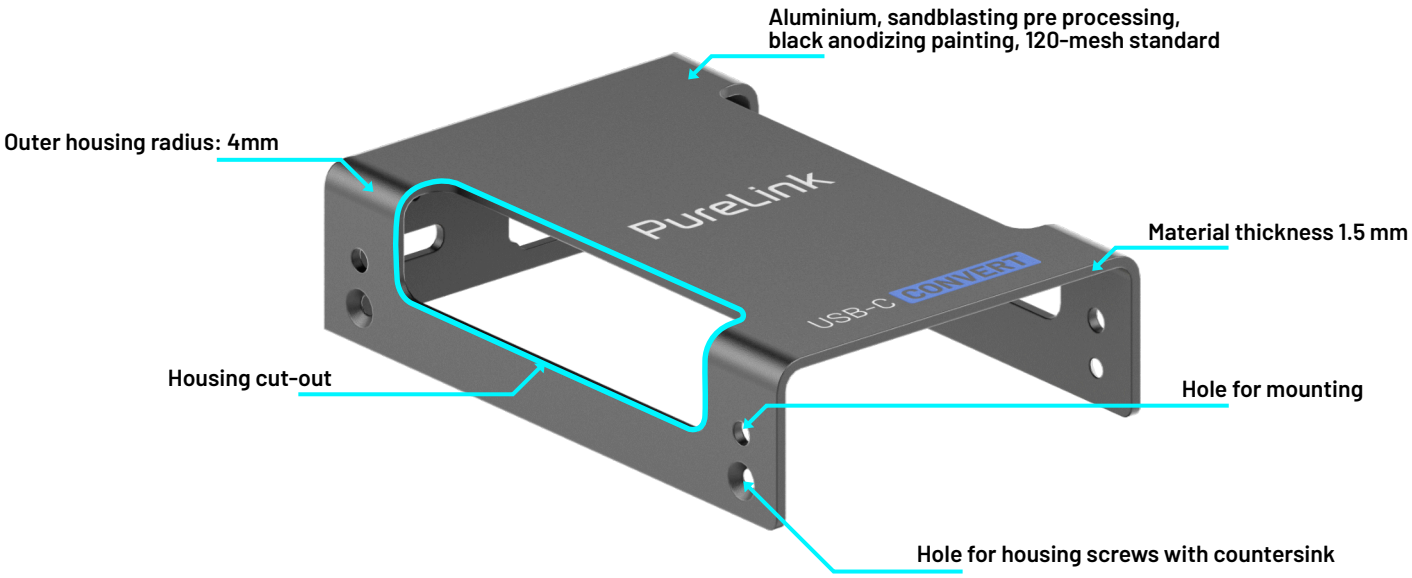

Housing base

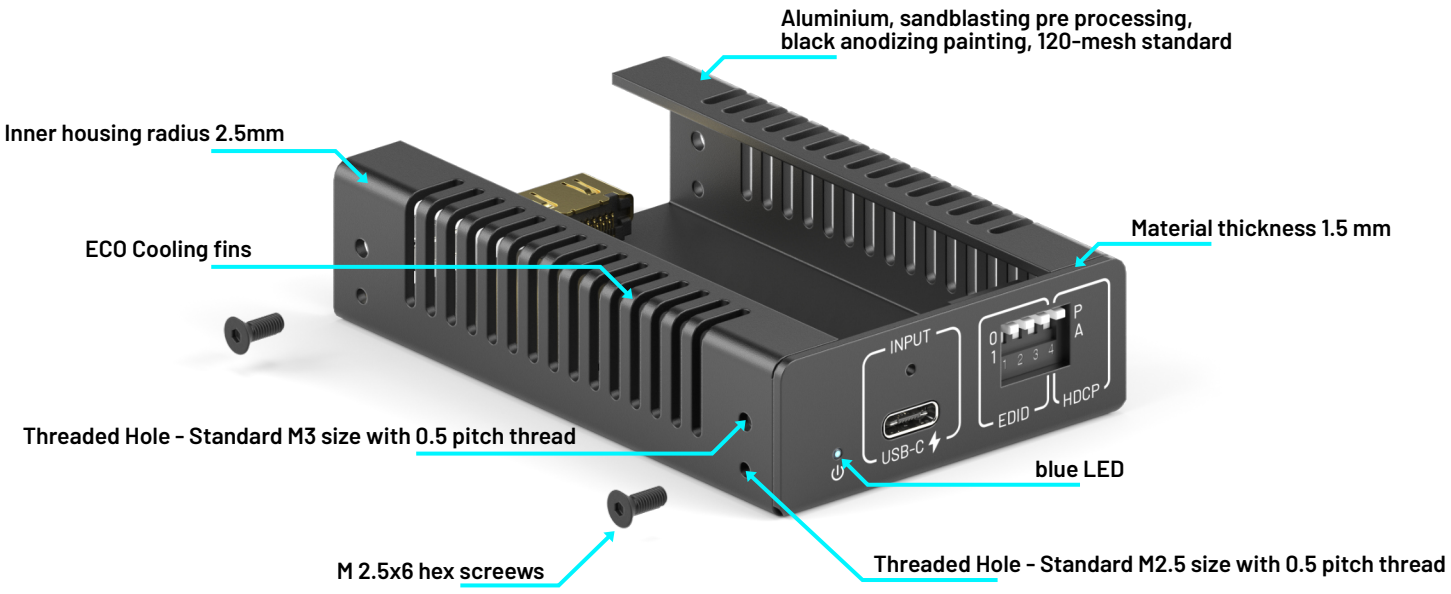

To calculate the cut-out, two steps are required.


1.
The first step is to calculate the cut-out using a ratio of **1:0.685**.
For example, if the housing is 89 mm in size, the calculation is:


89*0.685= 60.96 mm


2.
The second step is to ensure that the cut-out fits the ribs in the lower part of the housing. At the beginning and end of the cut-out, a **1.5 mm** rib should always be visible.


The calculated value must therefore be adjusted so that the last ribs are visible by **1.5 mm**. The final cut-out is **61 mm**.


Housing cover

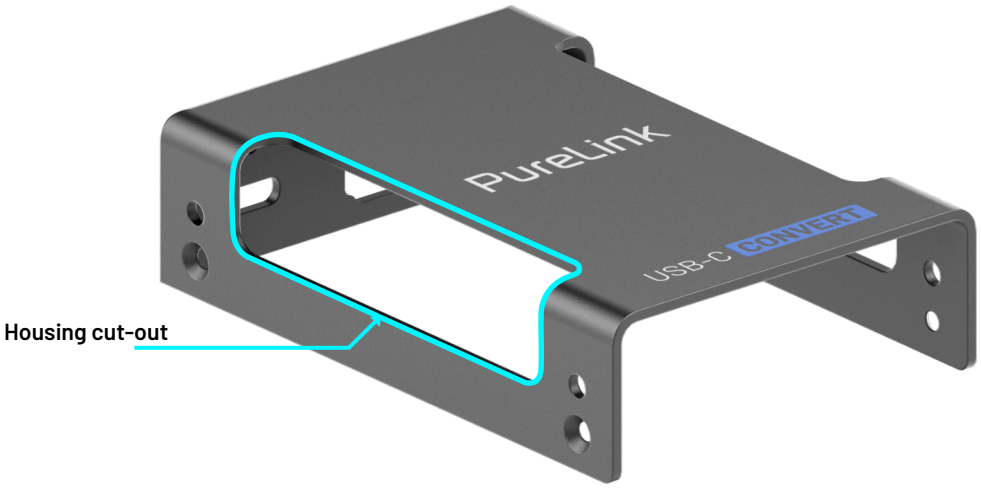


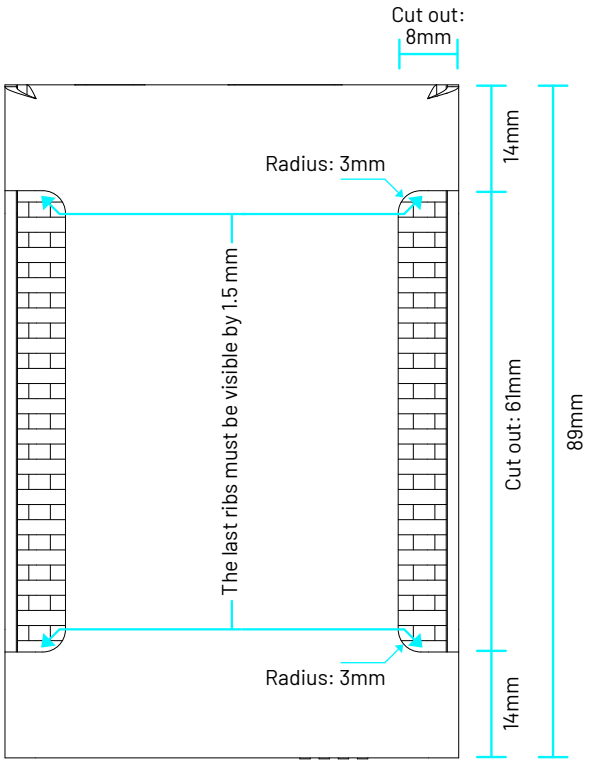


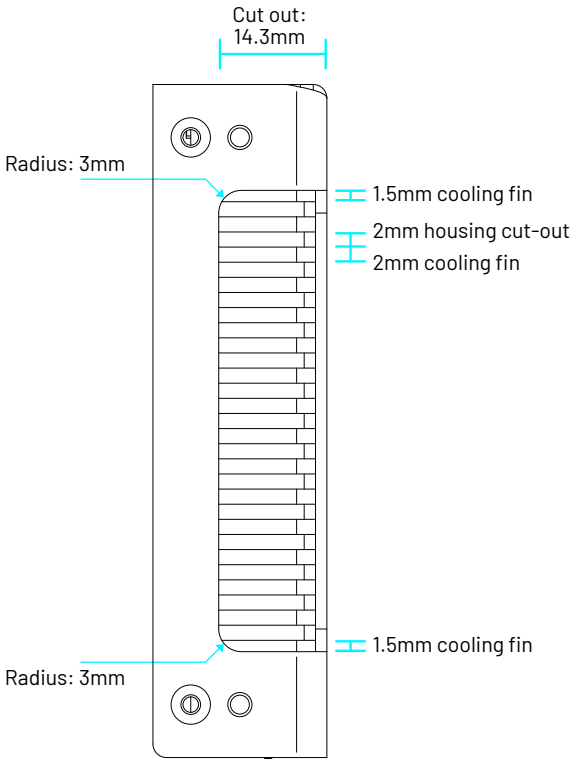


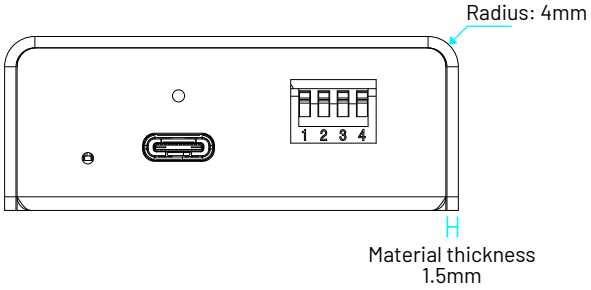
Radius: 4mm
1 2 3 4
Material thickness
1.5mm

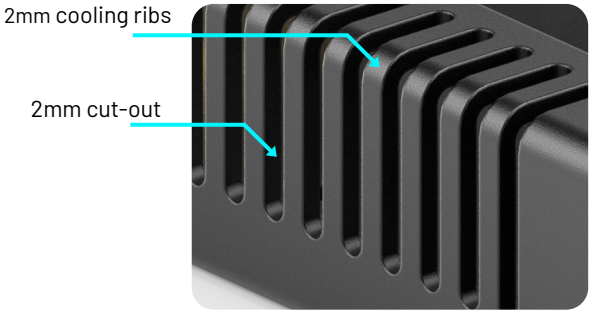
2mm cooling ribs
2mm cut-out

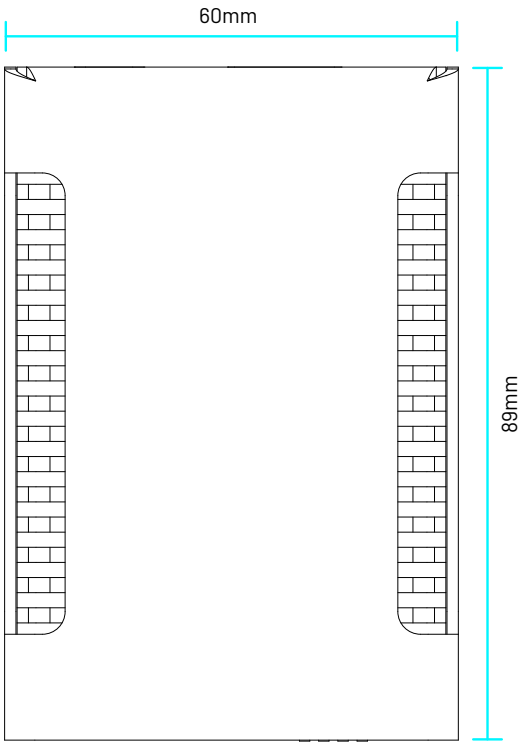
60mm
89mm

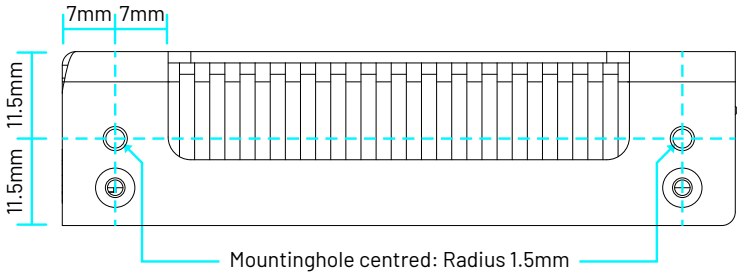
7mm
7mm
11.5mm
11.5mm
Mountinghole centred: Radius 1.5mm

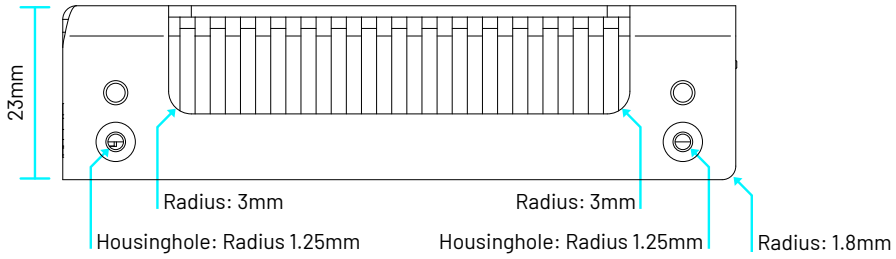

23mm
Radius: 3mm
Radius: 3mm
Housinghole: Radius 1.25mm
Housinghole: Radius 1.25mm
Radius: 1.8mm

All PureTools enclosures can be mounted in various positions using an additional part. There are various options for mounting the device.




Small: XXSUB-PT-ACC-SM0UNT

Enclosures with a height of 23mm

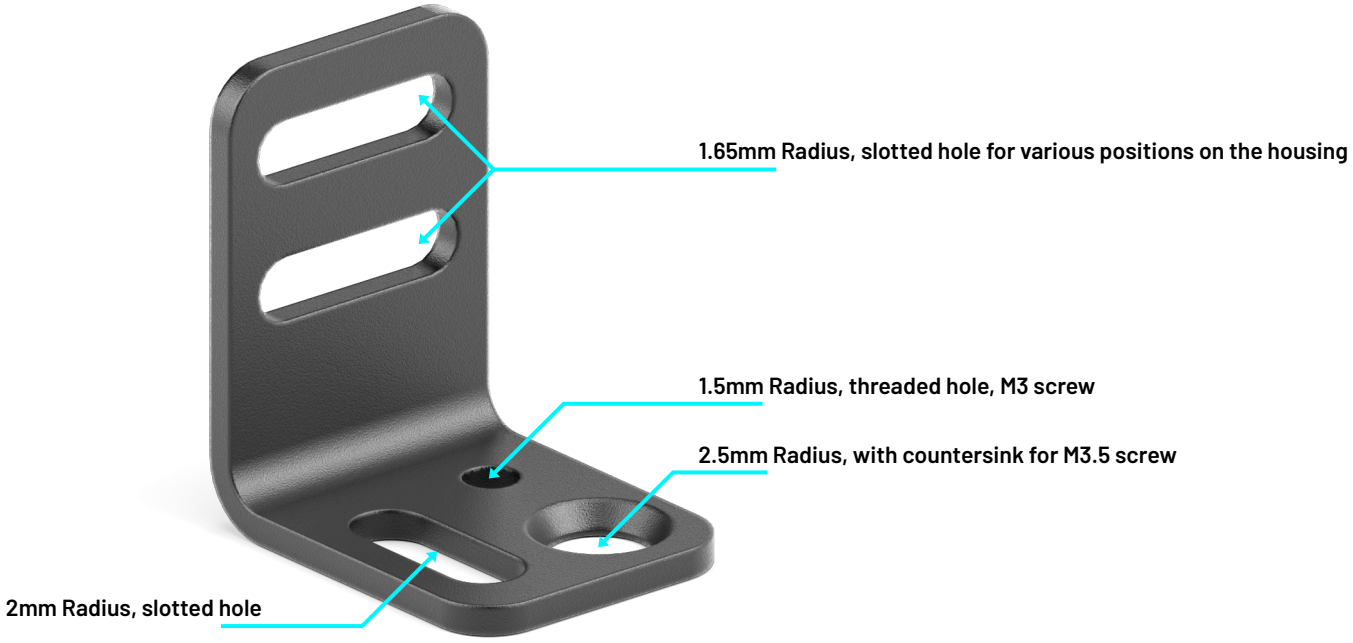


Detailed overview medium size

Housing cover

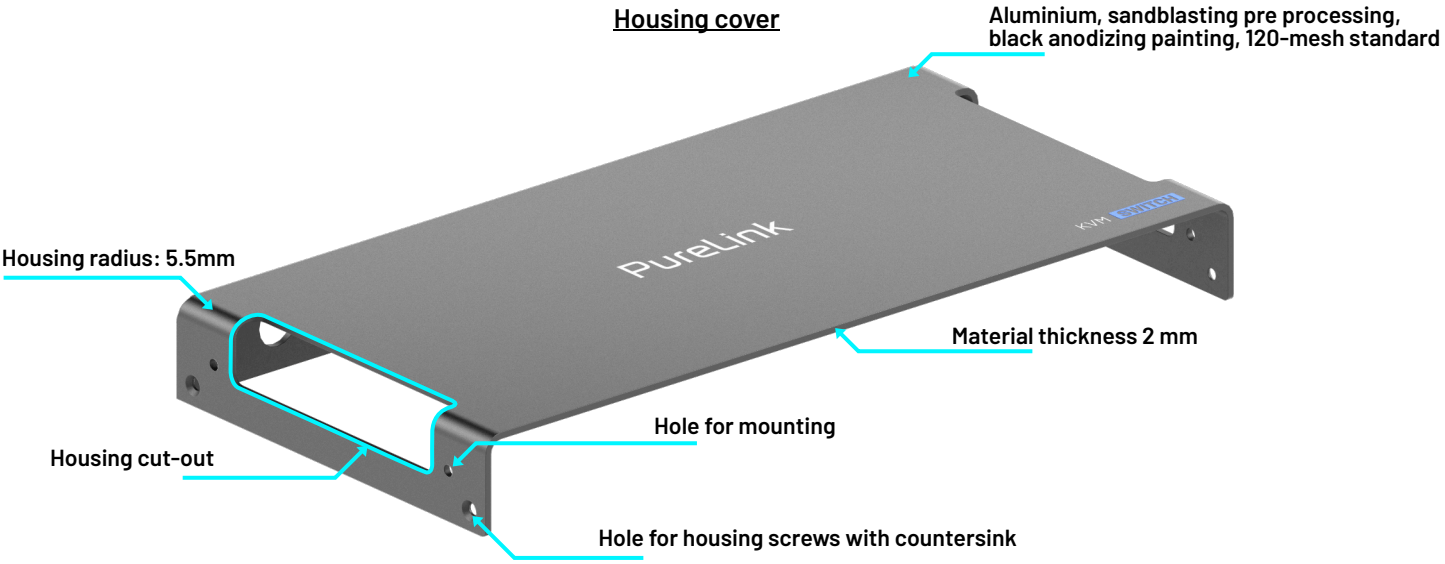


Housing base

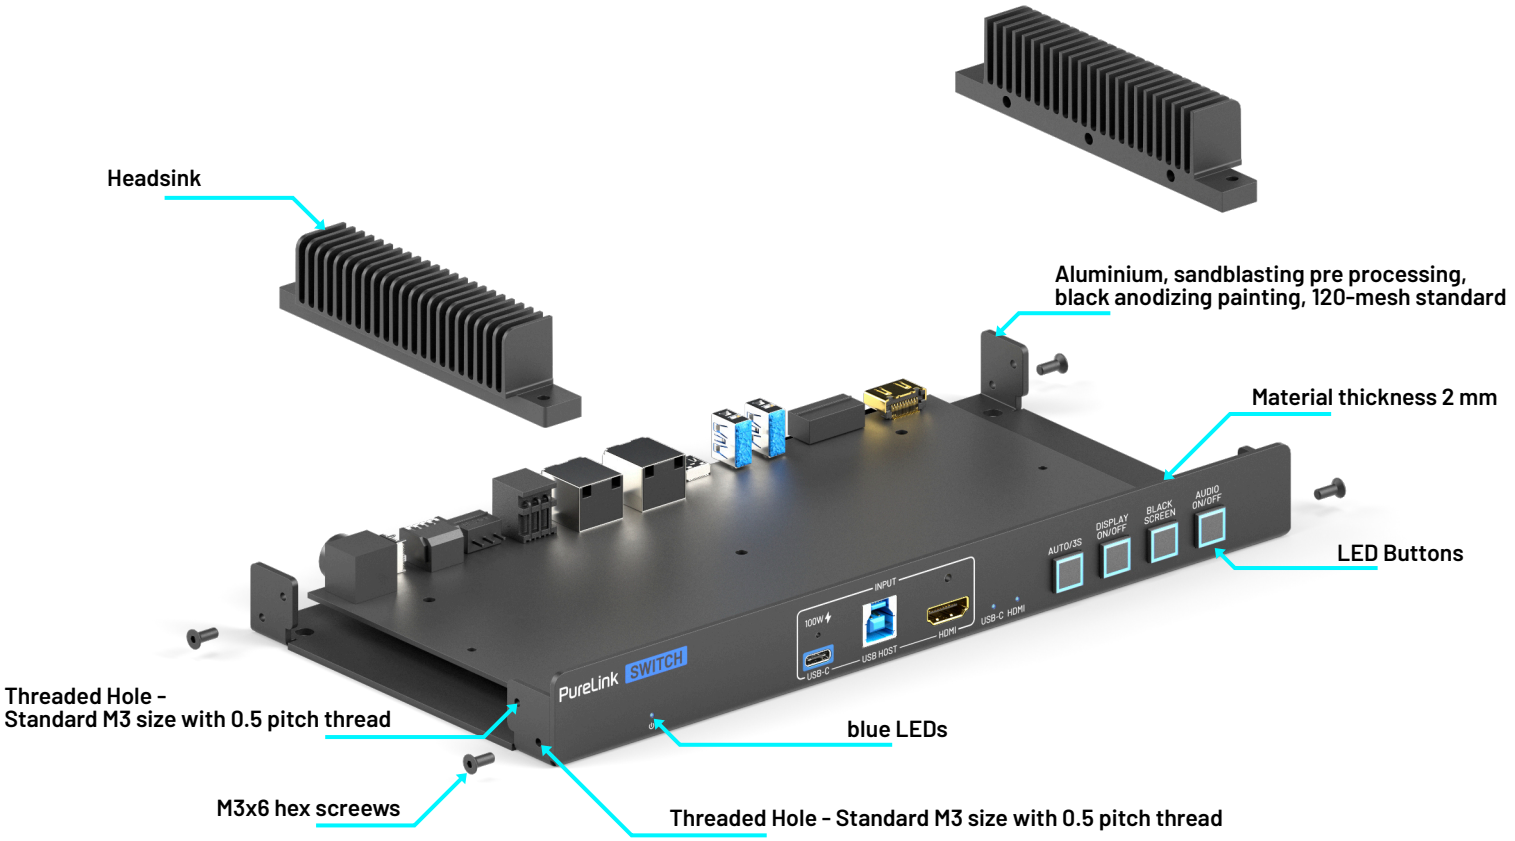



Housing cut-outs for large housings


The cut-out for the heat sink in large enclosures is always the same. There are no differences here, even if the enclosure is larger or smaller.


Housing cover

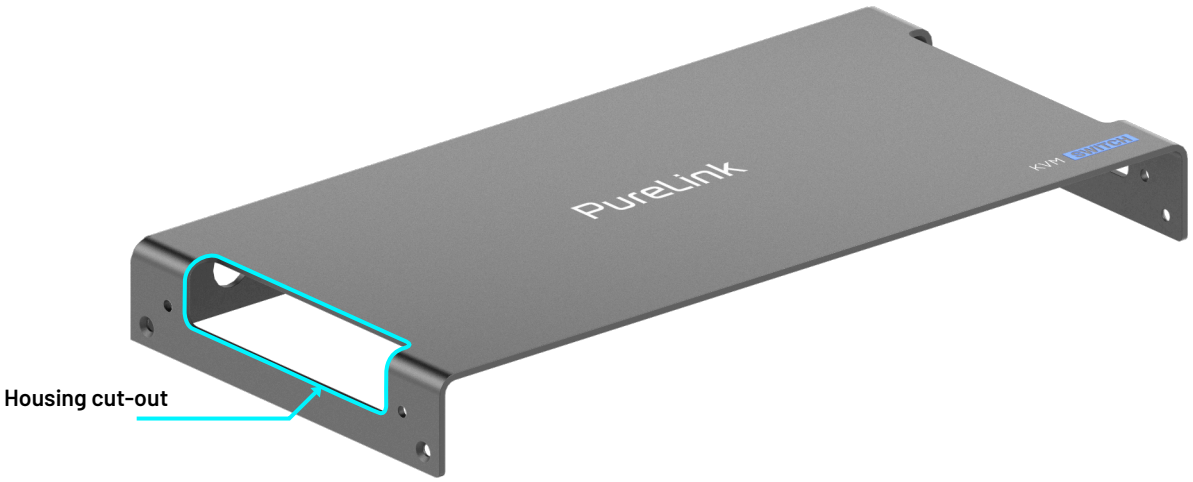

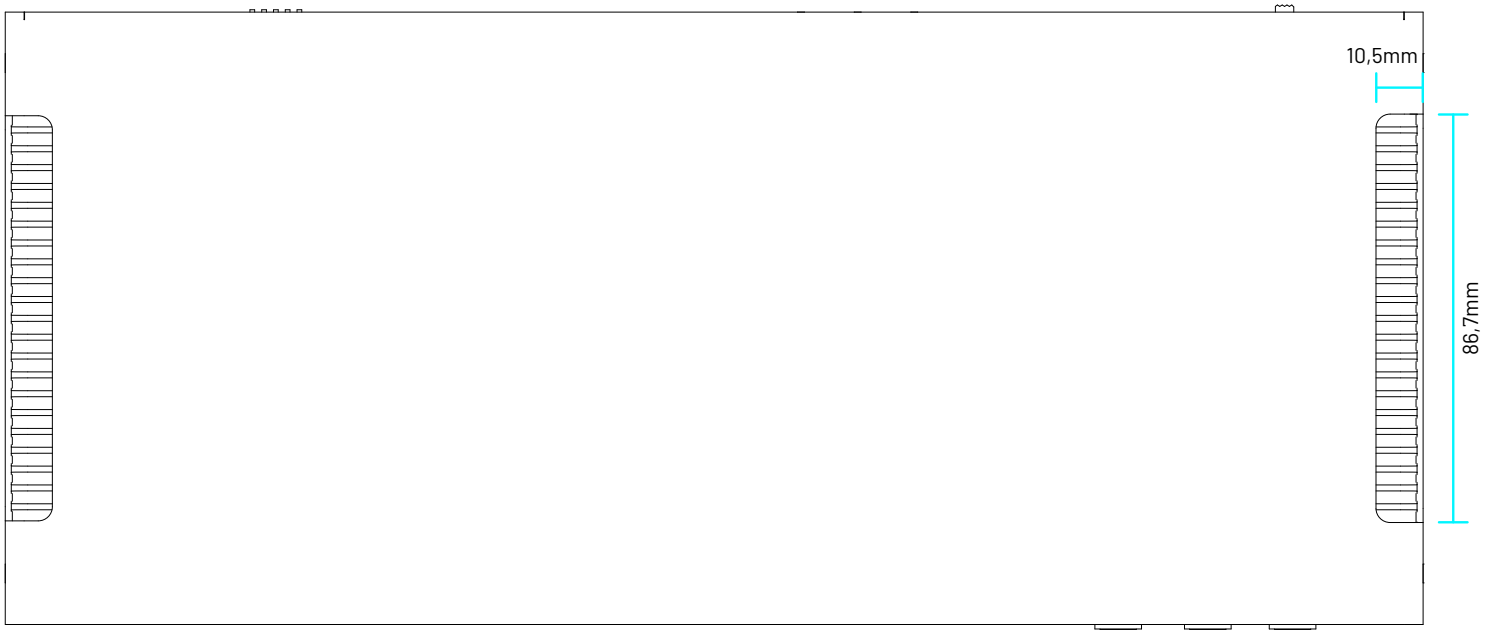

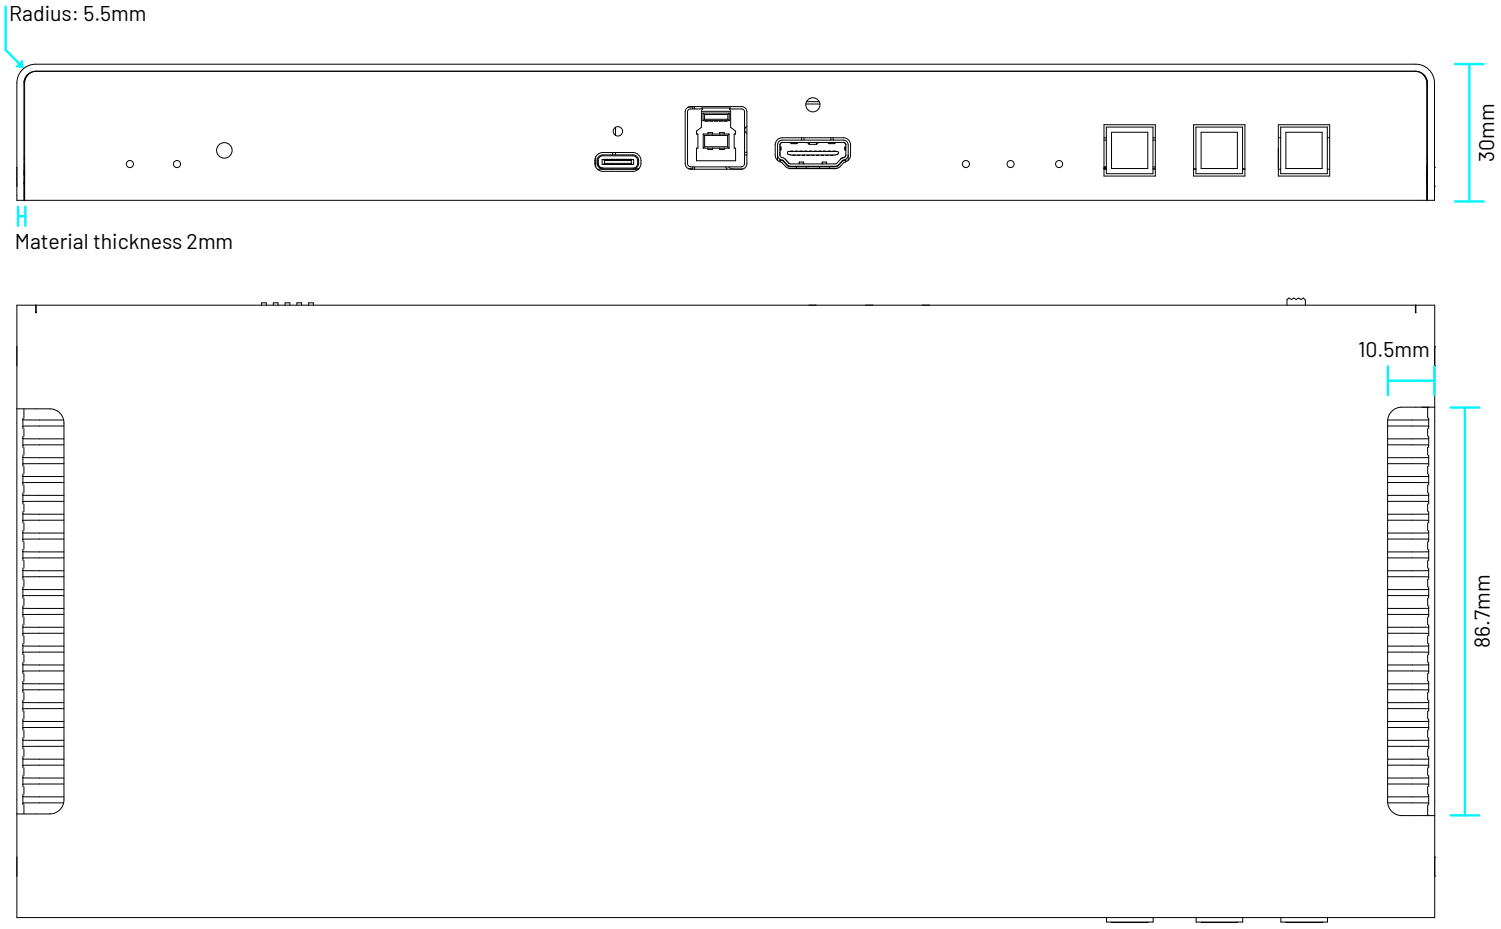
Radius: 5.5mm
30mm
Material thickness 2mm
10.5mm
86.7mm

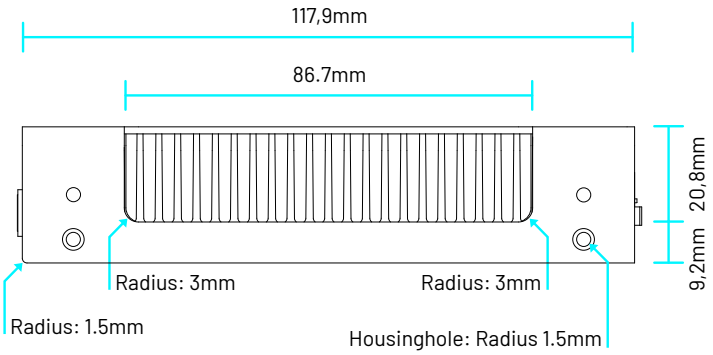

117,9mm
86.7mm
20,8mm
9,2mm
Radius: 3mm
Radius: 3mm
Radius: 1.5mm
Housinghole: Radius 1.5mm

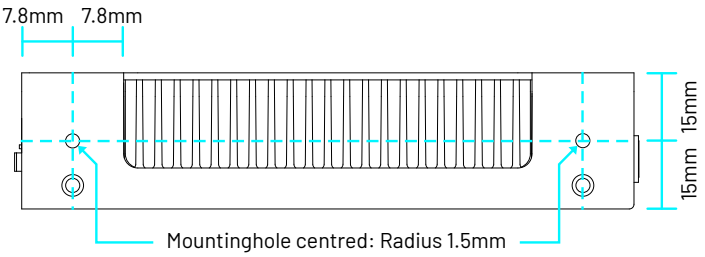
7.8mm
7.8mm
15mm
15mm
Mountinghole centred: Radius 1.5mm

Heatsink

"PureLink Heatsink:
PureLink part number - XXSUB-PT-ACC-MSINK
Supplier (Shenzhen HYI Industrial) part number ACC-MSINK"


The heat sink consists of a single block and is screwed to the lower housing. It is available in one size only.

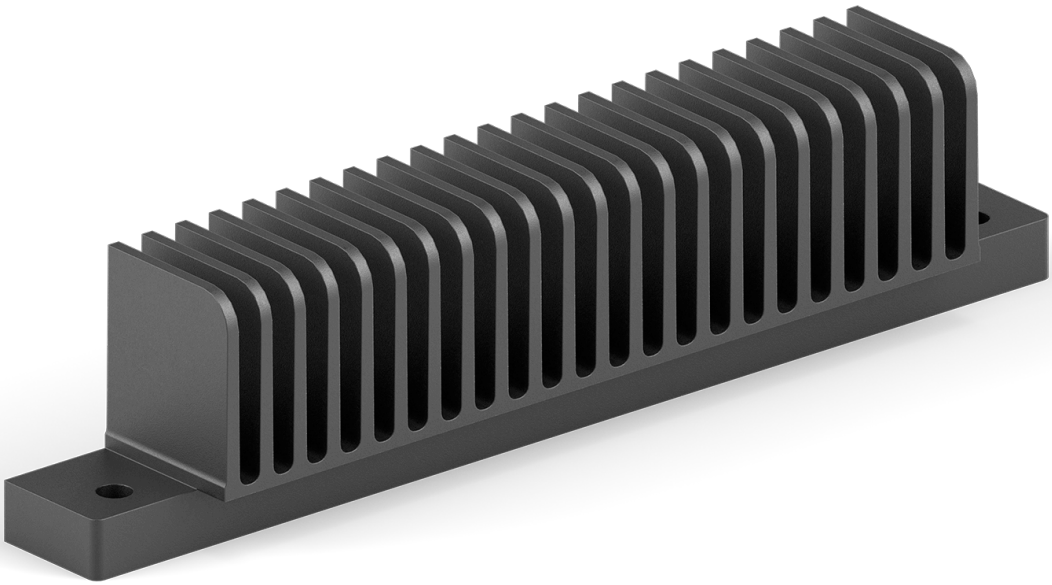

LED Button


"PureLink Heatsink:
PureLink part number - XXSUB-PT-ACC-MSINK
Supplier (Shenzhen HYI Industrial) part number ACC-MSINK"

The heat sink consists of a single block and is screwed to the lower housing. It is available in one size only.

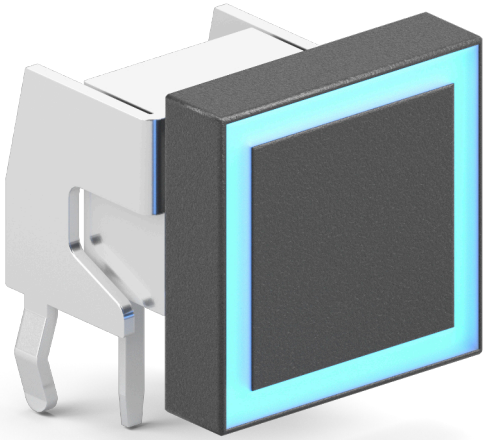


Medium: XXSUB-PT-ACC-MMOUNT

Enclosures with a height of 30mm

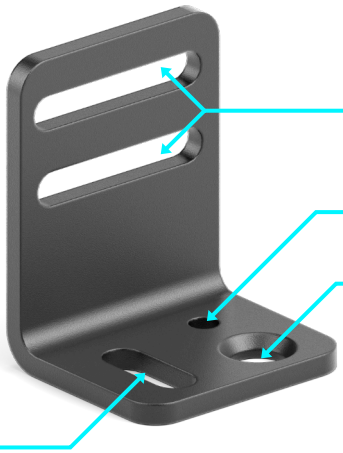


Detailed overview large/half rack size

Housing cover

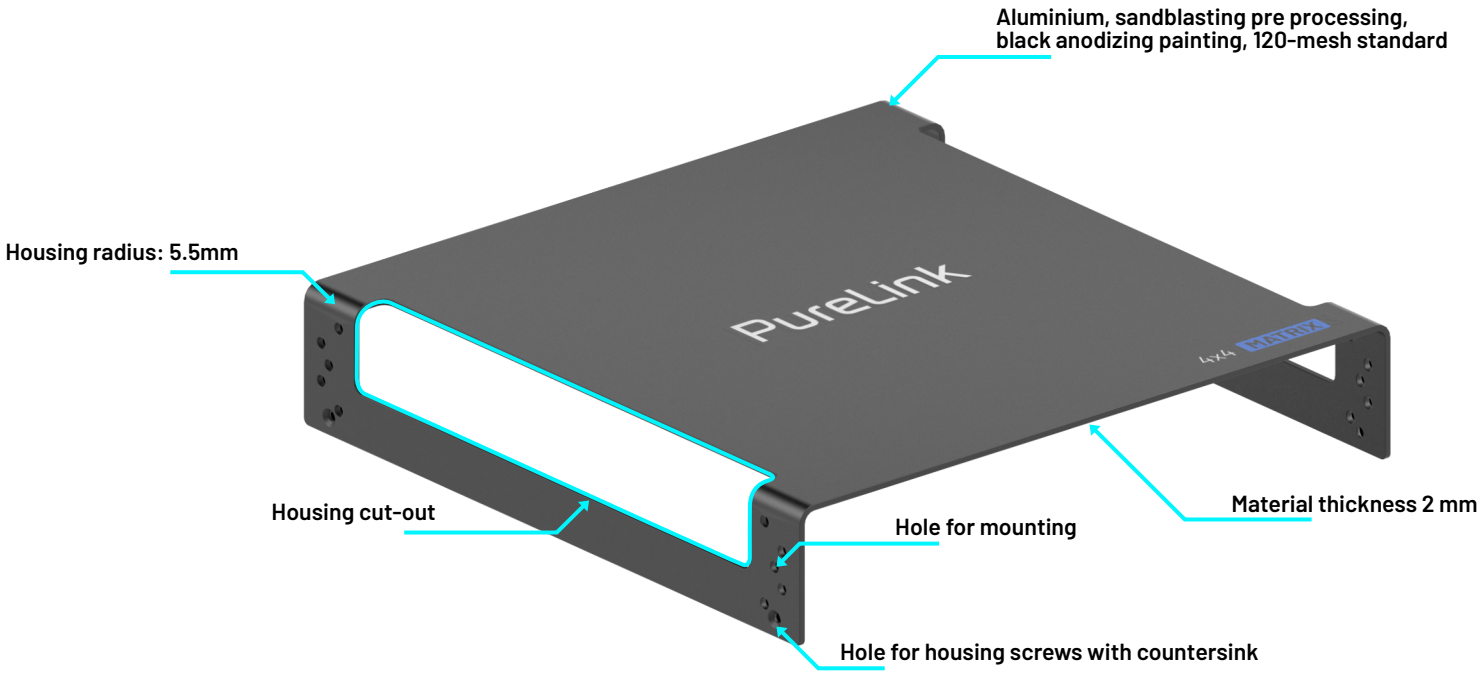

Housing base

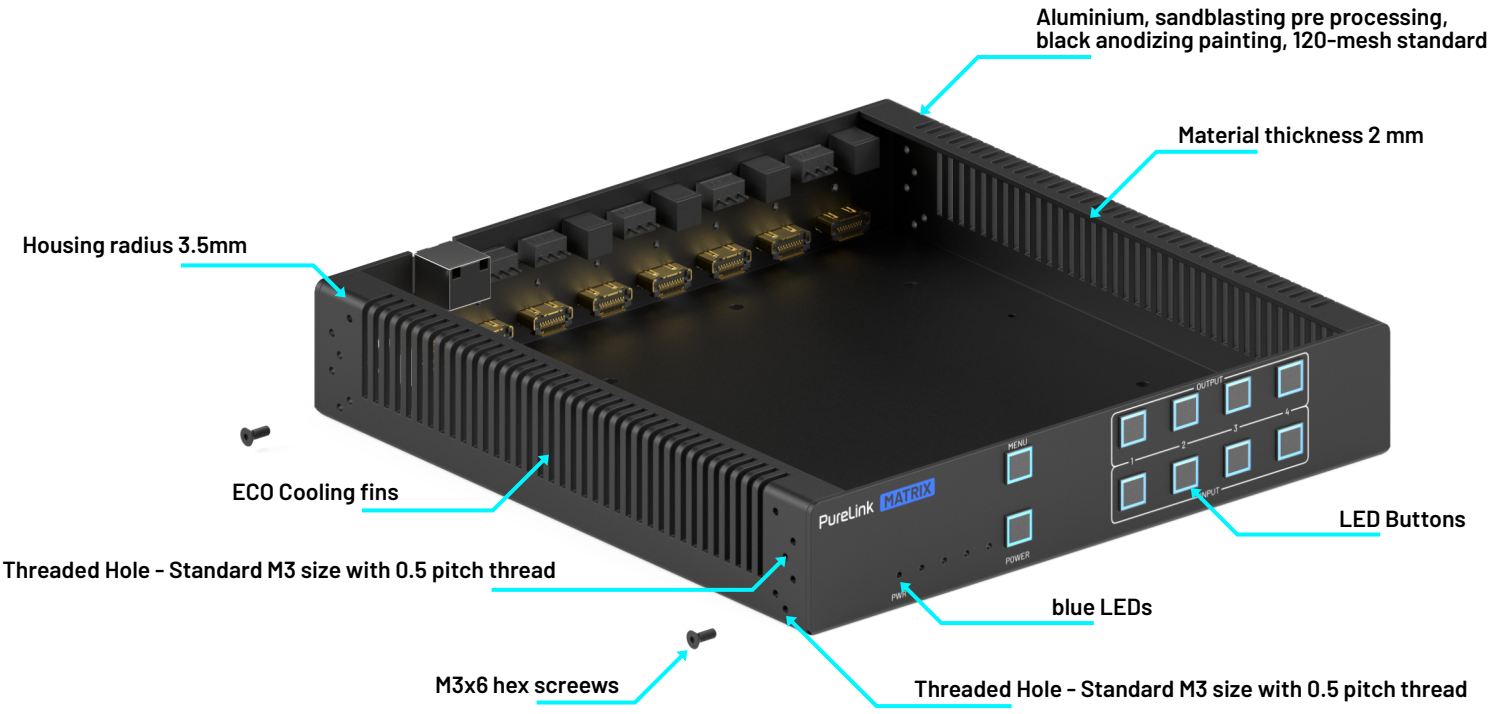

Housing cut-out


To calculate the cut-out, two steps are required.


1.
The first step is to calculate the cut-out using a ratio of 1:0.685.
For example, if the housing is 89 mm in size, the calculation is:


226*0.685= 154.81 mm

2.
The second step is to ensure that the cut-out fits the ribs in the lower part of the housing. At the beginning and end of the cut-out, a **1.5 mm** rib should always be visible.

The calculated value must therefore be adjusted so that the last ribs are visible by **1.5 mm**. The final cut-out is **165.5 mm.**

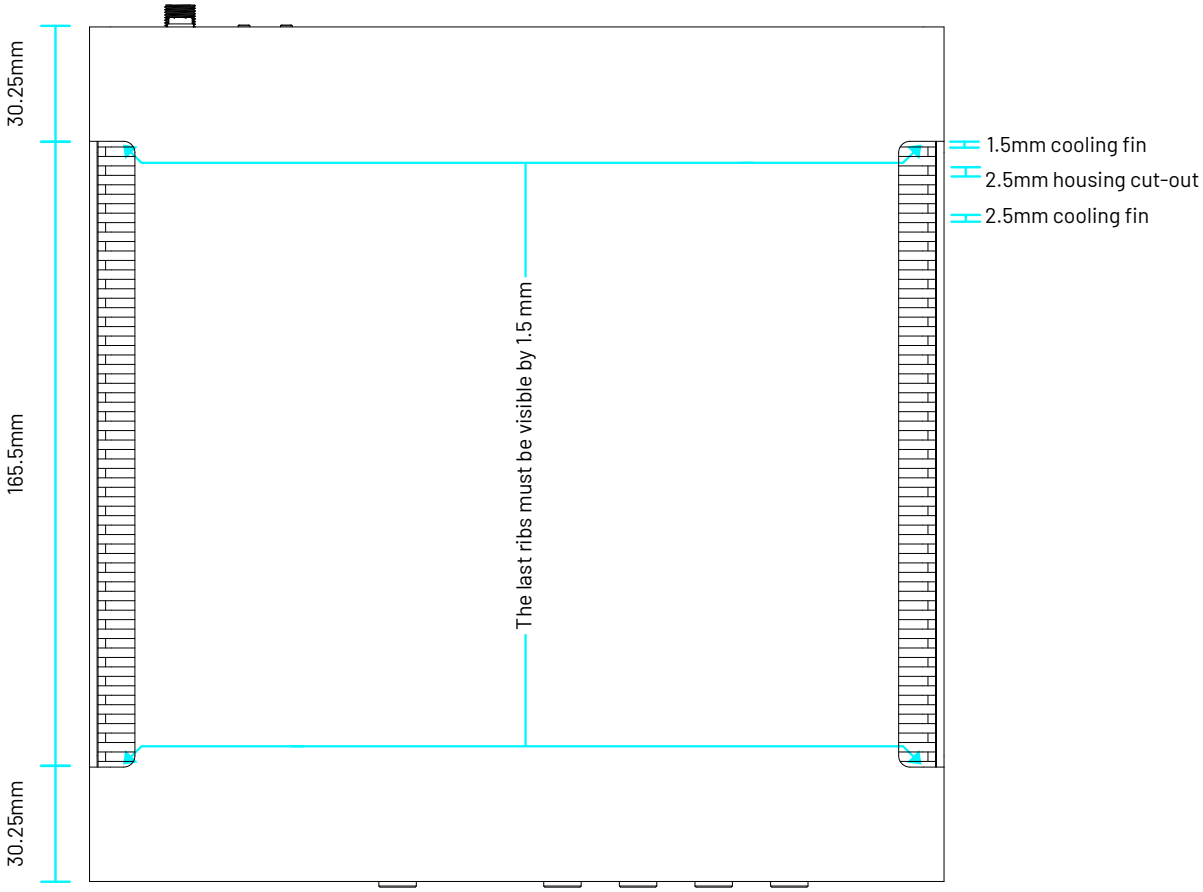

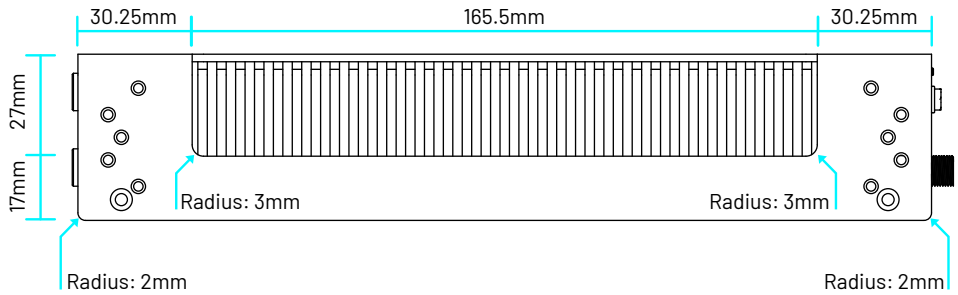


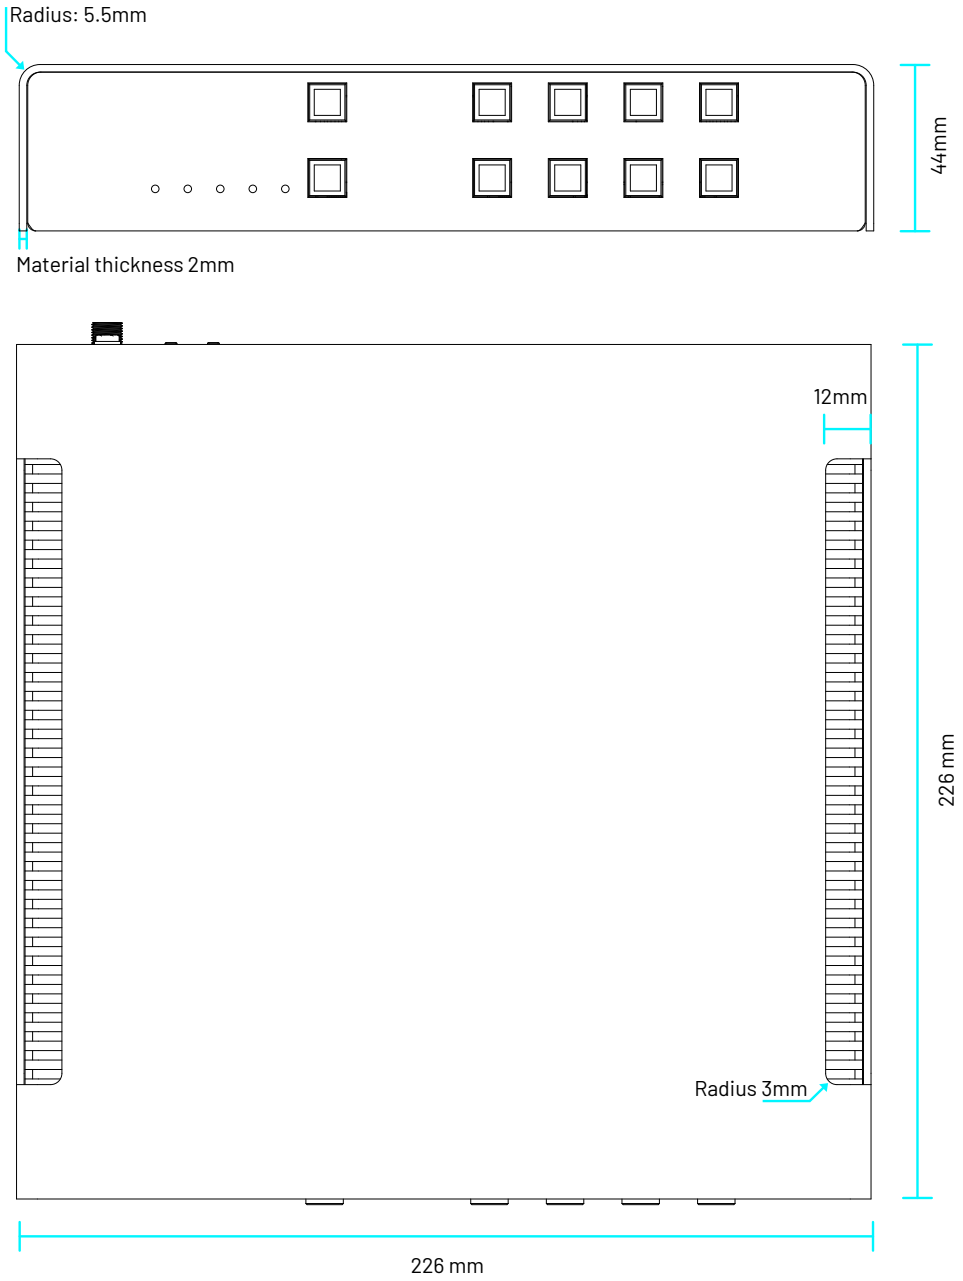
Radius: 5.5mm
44mm
Material thickness 2mm
12mm
226 mm
Radius 3mm
226 mm
30.25mm
165.5mm
30.25mm
mountinghole for racks
mountinghole for table
hole for housing screw

LED Button


"PureLink Heatsink:
PureLink part number - XXSUB-PT-ACC-MSINK
Supplier (Shenzhen HYI Industrial) part number ACC-MSINK"


The heat sink consists of a single block and is screwed to the lower housing. It is available in one size only.

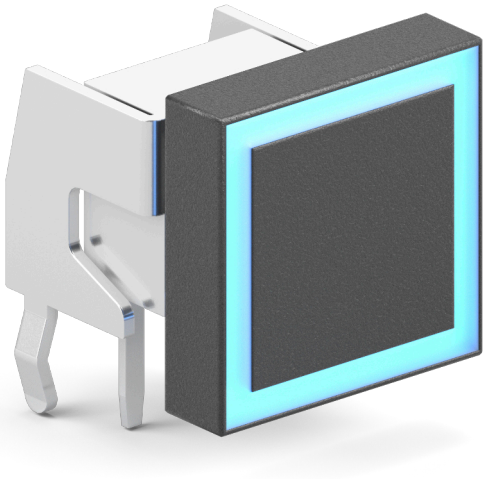

Large (noch keine Artikelnummer)

For the 44mm Enclosures size, a left and a right mounting foot are required

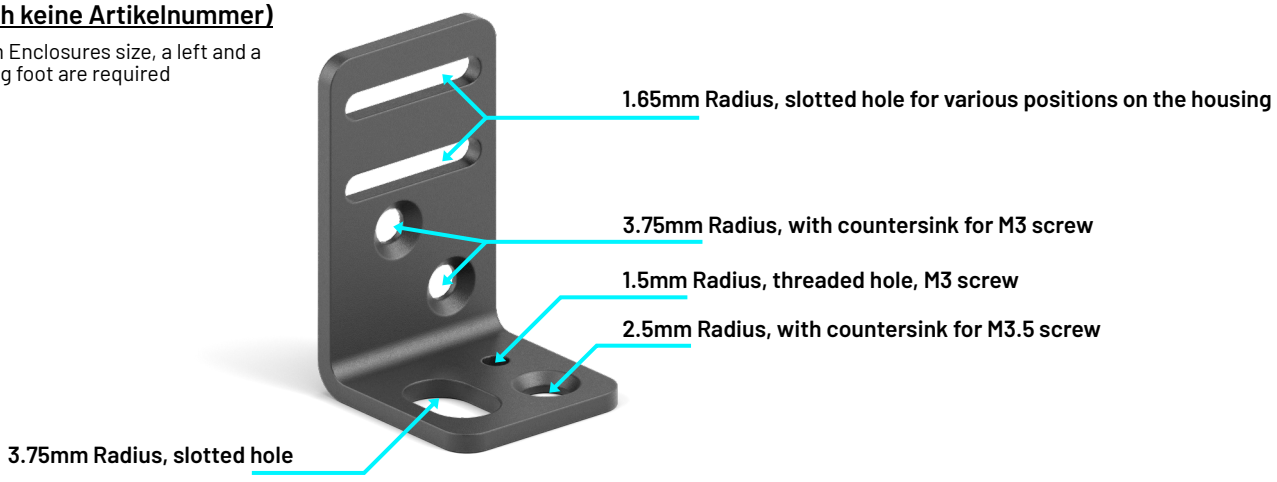

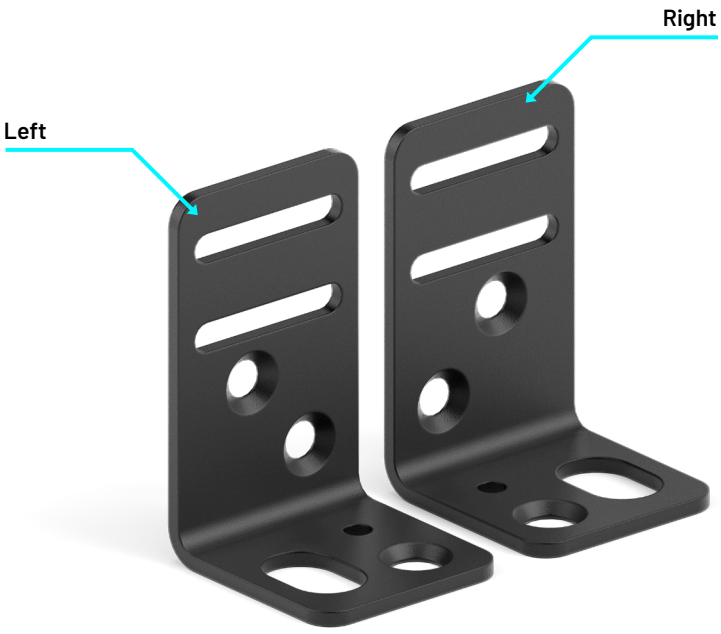

Mounting options












1U Rack mountable chassis

The 1U Rack enclosures only have ventilation holes on the sides, while the also has additional ventilation holes on the top.

4x4 Matrix

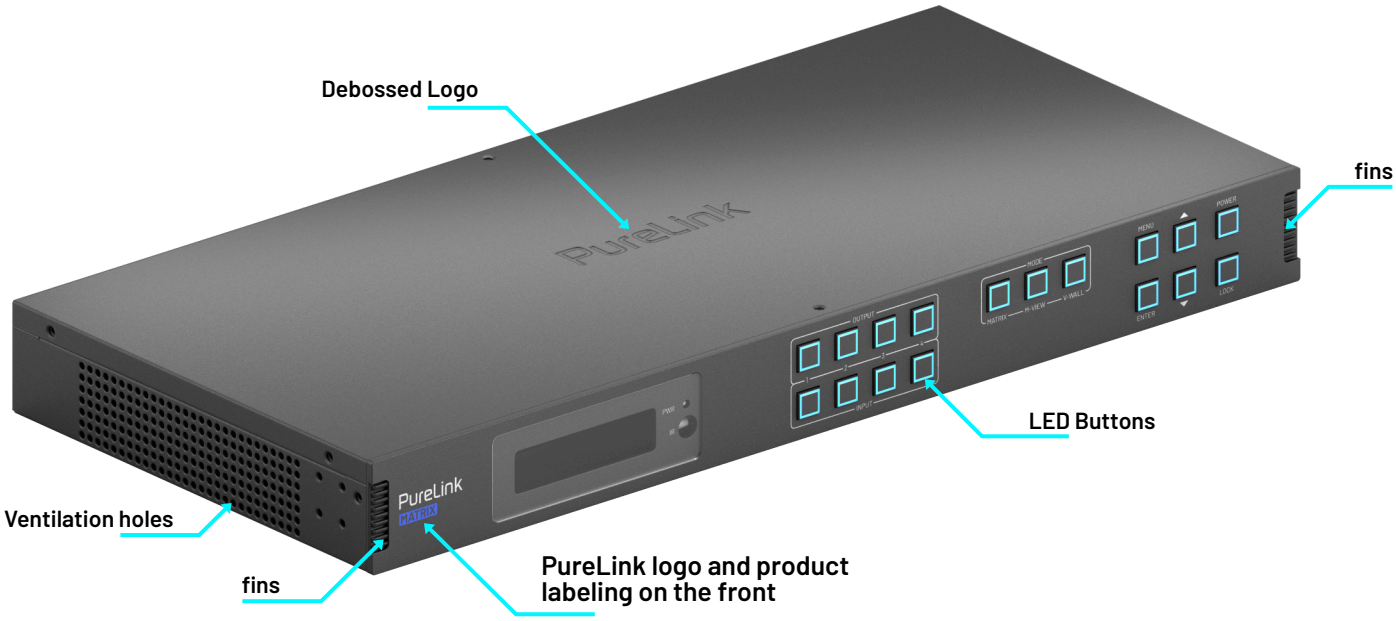


8x8 Matrix



Debossed Logo


Both devices have a logo size of **80x15.2mm**, which is debossed in the housing.

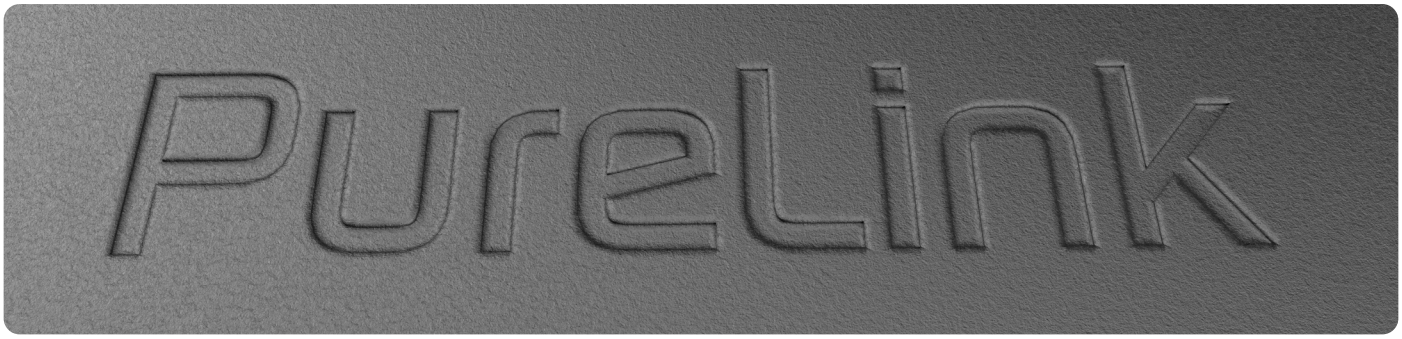

Logo on Frontside

On Matrix enclosures, the logo and blue text box are placed one below the other. The blue text box is structured in exactly the same way as on other Puretools devices.


The distance between the logo and the blue box is again **1/2X**, in this case **1.8 mm**.

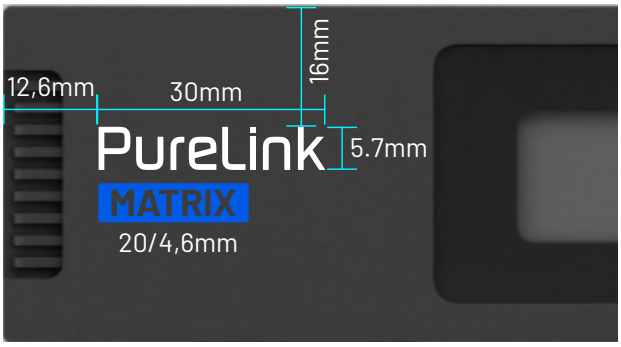


Frontfins

Fins are milled into the front left and right edges.



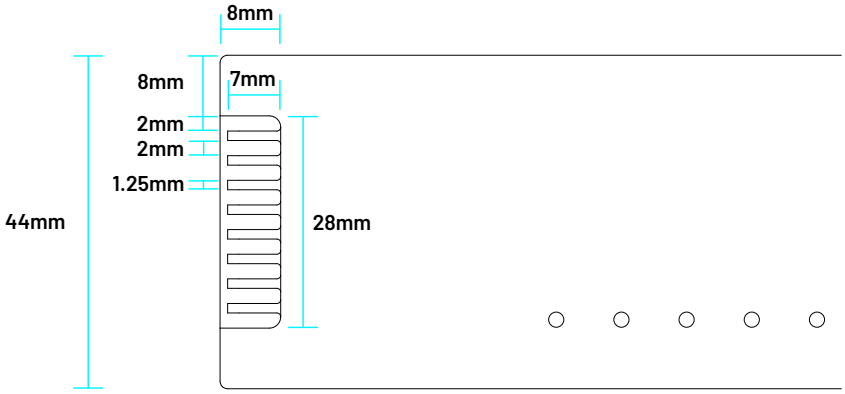

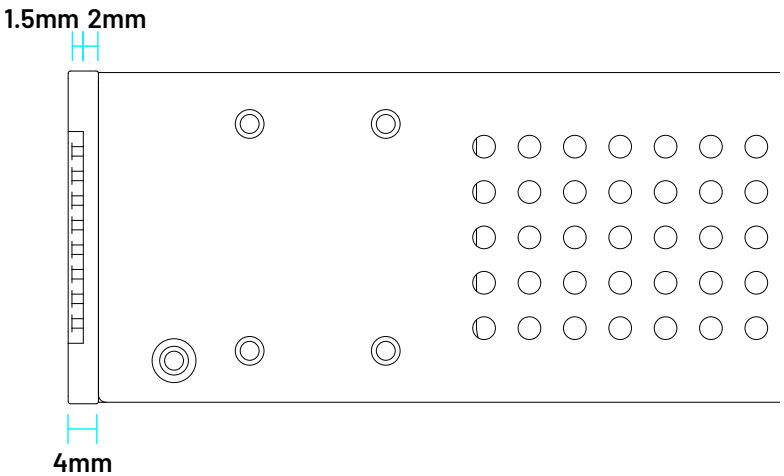

8x8 Matrix Ventilation holes

The ventilation holes on the side are centred on the side of the housing. There are **6 holes** above each other and **21 holes** next to each other, making a total of **126 holes**.

