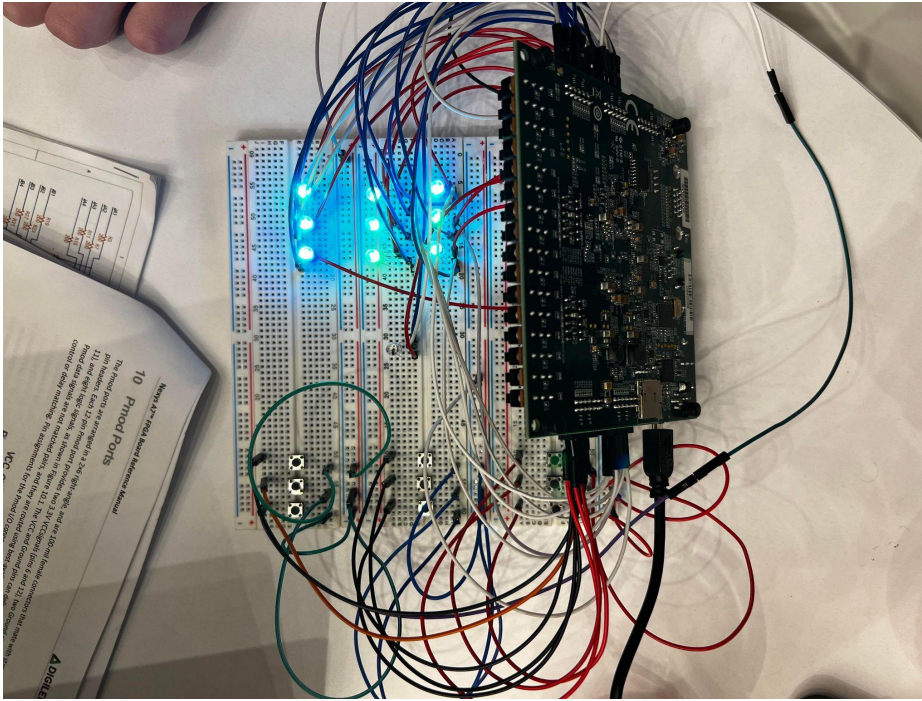# Our project had THREE phases:

Phase 1 (Off-board using 3 breadboards hosting a button-LED interface)

Result: UNSUCCESSFUL
Demonstration: (All lights lit up no matter what input was provided)

Phase 2 (Off-board using VGA Interface and Keyboard)

Result: SUCCESSFUL
Demonstration: Use this link to view demonstration video

Phase 3 (Off-board using VGA Interface) ←Final Design

Result: SUCCESSFUL
Demonstration: Use this link to view demonstration video